MxL86250C

Ethernet Switch

5-Port 2.5 Gigabit Ethernet Switch with 5 PHYs

MxL86250C

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

Data Sheet

Revision 1.4, 2025-09-26
Reference ID 620957

Legal Notice

The content of this document is furnished for informational use only, is subject to change without notice, and should not be construed as a commitment by MaxLinear, Inc. MaxLinear, Inc. assumes no responsibility or liability for any errors or inaccuracies that may appear in the informational content contained in this document. Complying with all applicable copyright laws is the responsibility of the user. Without limiting the rights under copyright, no part of this document may be reproduced into, stored in, or introduced into a retrieval system, or transmitted in any form or by any means (electronic, mechanical, photocopying, recording, or otherwise), or for any purpose, without the express written permission of MaxLinear, Inc.

EXCEPT AS OTHERWISE PROVIDED EXPRESSLY IN WRITING BY MAXLINEAR, AND TO THE MAXIMUM EXTENT PERMITTED BY LAW: (A) THE MAXLINEAR PRODUCTS ARE PROVIDED ON AN "AS IS" BASIS WITHOUT REPRESENTATIONS OR WARRANTIES OF ANY KIND, INCLUDING WITHOUT LIMITATION ANY IMPLIED OR STATUTORY WARRANTIES AND ANY WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, NON-INFRINGEMENT, OR TITLE; AND (B) MAXLINEAR DOES NOT GUARANTEE THAT THE PRODUCTS WILL BE FREE OF ERRORS OR DEFECTS. MAXLINEAR PRODUCTS SHOULD NOT BE USED IN ANY EMERGENCY, SECURITY, MILITARY, LIFE-SAVING, OR OTHER CRITICAL USE CASE WHERE A FAILURE OR MALFUNCTION COULD CAUSE PERSONAL INJURY OR DEATH, OR DAMAGE TO OR LOSS OF PROPERTY. USERS ASSUME ALL RISK FOR USING THE MAXLINEAR PRODUCTS IN SUCH USE CASE. CUSTOMERS AND USERS ARE SOLELY RESPONSIBLE FOR USING THEIR OWN SKILL AND JUDGMENT TO DETERMINE WHETHER MAXLINEAR PRODUCTS ARE SUITABLE FOR THE INTENDED USE CASE.

Data Sheet are Not Recommended for New Designs (NRND)
The Product(s) mentioned in this

MaxLinear, Inc. may have patents, patent applications, trademarks, copyrights, or other intellectual property rights covering subject matter in this document. Except as expressly provided in any written license agreement from MaxLinear, Inc., the furnishing of this document does not give you any license to these patents, trademarks, copyrights, or other intellectual property.

MaxLinear, the MaxLinear logo, any other MaxLinear trademarks (including but not limited to MxL, Full-Spectrum Capture, FSC, AirPHY, Puma, AnyWAN, VectorBoost, MXL WARE, and Panther), are all property of MaxLinear, Inc. or one of MaxLinear's subsidiaries in the U.S.A. and other countries. All rights reserved.

All third-party marks and logos are trademarks™ or registered® trademarks of their respective holders/owners. Use of such marks does not imply any affiliation with, sponsorship or endorsement by the owners/holders of such trademarks. All references by MaxLinear to third party trademarks are intended to constitute nominative fair use under applicable trademark laws.

The URLs provided are for informational purposes only; they do not constitute an endorsement or an approval by MaxLinear of any of the products or services of the corporation or organization or individual. MaxLinear bears no responsibility for the accuracy, legality or content of the external site or for that of subsequent links. Contact the external site for answers to questions regarding its content.

© 2025 MaxLinear, Inc. All rights reserved.

MaxLinear, Inc.
5966 La Place Court, Suite 100
Carlsbad, CA 92008
Tel.: +1 (760) 692-0711
Fax: +1 (760) 444-8598
www.maxlinear.com

Revision History

Current:	**Revision 1.4, 2025-09-26**
Previous:	**Revision 1.3, 2024-08-21**
Page	**Major changes since previous revision**
117	**Section 5.2 PHY-specific Management Registers**: • Removed **Internal Test Modes CDIAG and ABIST (Register 0.31)**.
270	**Table 56 JEDEC Thermal Resistance Package Parameter - Compact 2-R Model Network**: • Updated table.
272	**Table 58 Product and Package Naming**: • Changed shipping format information and ordering part number.
Page	**Major changes in Revision 1.3**
45	**Section 3.2 MDIO Slave Interface**: • Added MDIO slave section.
49	**Section 3.5 GPIO Mapping**: • Added section.
55	**Figure 10 LED Connection Options to Ground or Power Supply**: • Updated figure.
56	**Figure 11 Connection of a Dual Color LED and Configuring Pin Strap Value**: • Updated figure.
56	**Figure 12 Connection of a Single Color LED and Configuring Pin Strap Value**: • Updated figure.
65	**Section 3.9 Firmware Upgrade**: • Updated description.
66	**Section 3.10 Switch Fabric Functional Description**: • Switch Fabric Functional Description section moved to better add sub-sections covering Ethernet Bridging, VLANs, Multicast, Quality of Service, and Flow Classification.
119	**Section 5.2 PHY-specific Management Registers**: • Updated description of **TXADJ** in **Physical Layer Control 1 (Register 0.19)**.
121	**Section 5.2 PHY-specific Management Registers**: • Updated description of **SDETP** in **Physical Layer Control 2 (Register 0.20)**.
129	**Section 5.2 PHY-specific Management Registers**: • Removed LED3EN and LED3DA in **LED Control Register (Register 0.27)**.
233	**Section 6.4 Vendor Specific 1 Device Registers**: • Added **PHY Transmit Amplitude Control Register (Register 30.8)**.
235	**Section 6.4 Vendor Specific 1 Device Registers**: • Removed MACSEC_CAP in **NBASE-T Downshift Status Register (Register 30.11)**.
255	**Table 38 Typical Power Consumption**: • Updated table after chip characterization.
255	**Table 39 Maximum Power Consumption**: • Updated maximum power after chip characterization.
256	**Table 40 Maximum Current Per Rail**: • Updated table after chip characterization.
257	**Section 7.6.1 Digital Interfaces**: • Added HRSTN.

The Product (or products) mentioned in this data sheet are Not Recommended for New Designs (NRND)

Revision History

Current:	**Revision 1.4, 2025-09-26**
Previous:	**Revision 1.3, 2024-08-21**
260	**Figure 25 Timing Diagram for the Reset Sequence**: • Updated figure with reset cycle.
263	**Table 48 QSPI Interface Timing Parameters**: • Updated QSPI clock maximum from 100 MHz to 101.5625 MHz.

The product (or products) mentioned in this data sheet are Not Recommended for New Designs (NRND)

Third-Party Trademark and Registered Trademark Declarations

ANSI®	“ANSI”, the ANSI logo, and numerous other identifiers containing "ANSI" are registered trademarks, service marks, and accreditation marks of the American National Standards Institute (ANSI).
Cisco®	Cisco is a registered trademark or trademark of Cisco Systems, Inc. and/or its affiliates in the United States and certain other countries. A list of other Cisco marks is available at https://www.cisco.com/c/en/us/about/legal/trademarks.html.
IEEE®	“IEEE”, the IEEE logo, and other IEEE logos and titles are registered trademarks or service marks of The Institute of Electrical and Electronics Engineers, Incorporated.
IEEE 802.1™	IEEE 802.1 is a trademark of The Institute of Electrical and Electronics Engineers, Incorporated.
IEEE 802.3™	IEEE 802.3 is a trademark of The Institute of Electrical and Electronics Engineers, Incorporated.
ITU-T®	ITU-T is a registered trademark of the ITU, a specialized agency of the United Nations.
JEDEC®	JEDEC is a registered trademark of the JEDEC Solid State Technology Association.
Macronix®	Macronix, MXIC, MXIC logo, XtraROM, NBit and Macronix NBit are trademarks of Macronix International Co., Ltd.
Microsoft®	Microsoft is a registered trademark of Microsoft Corporation in the United States and/or other countries.

All other trademarks or registered trademarks are the property of their respective holders/owners.

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

Table of Contents

Table of Contents . . . 6
List of Figures . . . 10
List of Tables . . . 11
Preface . . . 13
1 Product Overview . . . 14
1.1 Features . . . 15
1.2 Applications . . . 17
1.3 Block Diagram . . . 18
2 External Signals . . . 19
2.1 Logic Symbol . . . 19
2.2 External Signal Description . . . 20
2.2.1 Ball Diagram . . . 20
2.2.2 Abbreviations . . . 22
2.2.3 Input/Output Signals . . . 23
2.2.3.1 Ethernet Twisted Pair Interface . . . 23
2.2.3.2 MDIO Interface . . . 25
2.2.3.3 QSPI Interface . . . 26
2.2.3.4 Reset Interface . . . 28
2.2.3.5 LED/UART/JTAG Interface . . . 29
2.2.3.6 Miscellaneous Signals . . . 33
2.2.3.7 Power Supply for GPHY . . . 37
2.2.3.8 Power Supply for TPI (AFE) . . . 39
2.2.3.9 Ground . . . 40
2.2.3.10 Not Connected Signals . . . 41
3 Functional Description . . . 42
3.1 Power Supply, Clock, and Reset . . . 42
3.1.1 Power Supply . . . 42
3.1.2 Clock . . . 42
3.1.3 Reset Generation . . . 42
3.1.4 Power-On Sequence . . . 42
3.1.5 Configuration by Pin Strapping . . . 43
3.2 MDIO Slave Interface . . . 45
3.3 Configuration via MDIO Management Interface . . . 46
3.4 Quad Serial Peripheral Interface . . . 47
3.4.1 Supported Flash Memory Devices . . . 47
3.5 GPIO Mapping . . . 49
3.6 Ethernet PHY Interface . . . 51
3.6.1 Twisted Pair Interface . . . 51
3.6.2 Transformerless Ethernet . . . 51
3.6.3 Auto-Negotiation . . . 52
3.6.4 Auto-Downspeed . . . 52
3.6.5 Polarity Reversal Correction . . . 52
3.6.6 Auto-Crossover Correction . . . 52
3.6.7 RJ45 Tab Up or Tab Down Configuration . . . 53
3.6.8 Wake-on-LAN . . . 54
3.7 LED Interface . . . 55

The product(or products) mentioned in this data sheet are Not Recommended for New Designs (NRND)

3.7.1 LED . . . 55
3.7.2 LED Configuration . . . 55
3.7.3 LED Brightness Control . . . 57
3.8 Power Management . . . 58
3.8.1 Power States . . . 58
3.8.2 RESET PWRUP . . . 58
3.8.3 POWER DOWN State . . . 58
3.8.4 SCAN (ANEG) State . . . 59
3.8.5 PING (ANEG) State . . . 59
3.8.6 Low-Power State . . . 59
3.8.7 NORMAL State . . . 63
3.8.8 Low Power IDLE State - Energy-Efficient Ethernet . . . 64
3.9 Firmware Upgrade . . . 65
3.10 Switch Fabric Functional Description . . . 66
3.10.1 Overview . . . 66
3.10.1.1 Packet Flow . . . 66
3.10.1.2 Switch Fabric Control . . . 67
3.10.2 Ethernet Bridging . . . 68
3.10.2.1 Parsing . . . 68
3.10.2.2 MAC Bridging Table . . . 68
3.10.2.3 Layer 2 Security . . . 68
3.10.2.4 Spanning Tree Protocol Support . . . 69
3.10.2.5 Flow Control Function . . . 69
3.10.2.6 Port Trunking Functions . . . 69
3.10.3 VLAN Functions . . . 71
3.10.3.1 VLAN Association . . . 71
3.10.3.2 VLAN QinQ . . . 71
3.10.3.3 Extended VLAN Tagging Operation . . . 71
3.10.3.4 VLAN Filtering . . . 72
3.10.3.5 VLAN Transparent Mode . . . 72
3.10.3.6 Cross-VLAN Functionality . . . 73
3.10.4 Multicast Forwarding Functions . . . 74
3.10.4.1 Layer 2 Multicast Forwarding . . . 74
3.10.4.2 Layer 3 Multicast Forwarding . . . 74
3.10.4.3 IGMP and MLD Snooping . . . 74
3.10.5 Quality of Service Functions . . . 75
3.10.5.1 Class of Service Assignment . . . 75
3.10.5.2 Remarking Function . . . 75
3.10.5.3 Queue Mapping . . . 76
3.10.5.4 Rate Metering . . . 76
3.10.5.5 Rate Shaping . . . 77
3.10.5.6 Queue Scheduling . . . 77
3.10.5.7 Congestion Management . . . 77
3.10.5.8 Egress Queue Congestion Notification . . . 78
3.10.5.9 Storm Control . . . 78
3.10.6 Flow Classification Function . . . 80
3.10.7 Operation, Administration, and Management Functions . . . 81
3.10.7.1 Monitoring Counters . . . 81
3.10.7.2 Port Mirroring . . . 81
3.10.7.3 Special Tag Functionality . . . 82
3.10.7.4 Loop Detection . . . 87

The product (or products) mentioned in this data sheet are Not Recommended for New Designs (NRND)

4 MDIO and MMD Register Interface Description . . . 88
4.1 MDIO-specific Terminology . . . 88
4.2 Register Naming and Numbering . . . 89
4.2.1 Register Numbering . . . 89
4.2.2 Register Naming . . . 89
4.2.3 Examples . . . 89
4.3 MMD Devices Present in MxL86250C . . . 90
4.4 Responsibilities of the STA . . . 91
4.5 MDIO Access Protocols to Read / Write Registers . . . 92

5 PHY MDIO Registers Detailed Description . . . 93
5.1 Standard Management Registers . . . 94
5.1.1 Standard Management Register Descriptions . . . 95
5.2 PHY-specific Management Registers . . . 117
5.2.1 PHY-specific Management Register Descriptions . . . 118

6 PHY MMD Registers Detailed Description . . . 135
6.1 Standard PMAPMD Registers for MMD=0x01 . . . 136
6.1.1 PMAPMD Register Descriptions . . . 138
6.2 Standard PCS Registers . . . 177
6.2.1 PCS Register Descriptions . . . 178
6.3 Standard Auto-Negotiation Registers for MMD=0x07 . . . 197
6.3.1 ANEG Register Descriptions . . . 198
6.4 Vendor Specific 1 Device Registers . . . 226
6.4.1 VSPEC1 Register Descriptions . . . 227
6.5 Vendor Specific 2 Device Registers . . . 244
6.5.1 VSPEC2 Register Descriptions . . . 245

7 Electrical Characteristics . . . 252
7.1 Absolute Maximum Ratings . . . 252
7.2 Operating Range . . . 254
7.3 Typical Power Consumption . . . 255
7.4 Maximum Thermal Design Power . . . 255
7.5 Maximum Current . . . 255
7.6 DC Characteristics . . . 257
7.6.1 Digital Interfaces . . . 257
7.6.2 Twisted Pair Interface . . . 257
7.6.3 Built-in Temperature Sensor . . . 258
7.7 AC Characteristics . . . 259
7.7.1 Power Up Sequence . . . 259
7.7.2 Input Clock . . . 261
7.7.3 Power Supply Rail Requirements . . . 261
7.7.4 MDIO Slave Interface . . . 262
7.7.5 Quad Serial Peripheral Interface (QSPI) . . . 263
7.7.6 JTAG Interface . . . 264
7.7.7 Differential Reference Clock Interface . . . 265
7.7.8 Crystal Specification . . . 266
7.8 External Circuitry . . . 267
7.8.1 Twisted-Pair Common-Mode Rejection and Termination Circuitry . . . 267
7.8.2 Transformer (Magnetics) . . . 268
7.8.3 RJ45 Plug . . . 269

8 Package Outline . . . 270

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

9 Product Ordering Information 272
Literature References 273
Standards References 273
Terminology 274

The product (or products) mentioned in this data sheet are Not Recommended for New Designs (NRND)

List of Figures

Figure 1 MxL86250C Block Diagram . . . 18
Figure 2 MxL86250C External Signal Overview . . . 19
Figure 3 Ball Diagram for PG-FCLBGA-277 (Top View) . . . 21
Figure 4 MDIO Slave . . . 45
Figure 5 MDIO Access Timing . . . 46
Figure 6 Twisted-Pair Interface of MxL86250C Including Transformer and RJ45 Plug . . . 51
Figure 7 External Circuitry for the Transformerless Ethernet Application . . . 51
Figure 8 RJ45 Tab Up or Tab Down Configuration . . . 53
Figure 9 WoL Application Block Diagram . . . 54
Figure 10 LED Connection Options to Ground or Power Supply . . . 55
Figure 11 Connection of a Dual Color LED and Configuring Pin Strap Value . . . 56
Figure 12 Connection of a Single Color LED and Configuring Pin Strap Value . . . 56
Figure 13 LED Brightness Control by Controlling LED Output Enable/Disable . . . 57
Figure 14 State Diagram for Power Down State Management . . . 58
Figure 15 Low Power Sequence . . . 60
Figure 16 EEE Low Power Idle Sequence . . . 64
Figure 17 Packet Flow Diagram . . . 66
Figure 18 Port Trunking Function . . . 70
Figure 19 PCP/DSCP/DEI Remarking . . . 75
Figure 20 Port Mirroring Examples – Ingress Monitoring . . . 81
Figure 21 Port Mirroring Examples – Egress Monitoring . . . 82
Figure 22 Port Redirection Examples – Egress Redirection . . . 82
Figure 23 Special Tag Location in the Frame . . . 83
Figure 24 Input/Output Waveform for AC Tests . . . 259
Figure 25 Timing Diagram for the Reset Sequence . . . 260
Figure 26 Timing Diagram for the MDIO Slave Interface . . . 262
Figure 27 QSPI Master Interface Timing . . . 263
Figure 28 Test Interface Timing . . . 264
Figure 29 Twisted Pair Common-Mode Rejection and Termination Circuitry . . . 267
Figure 30 Schematic of an Ethernet Transformer Device . . . 268
Figure 31 PG-FCLBGA-277 12 mm x 12 mm Package Outline . . . 271

The Product (or products) mentioned in this data sheet are Not Recommended for New Designs (NRND)

List of Tables

Table 1 Ball Diagram Color Codes . . . 20
Table 2 Abbreviations for Pin Type . . . 22
Table 3 Abbreviations for Buffer Type . . . 22
Table 4 Ethernet Twisted Pair Interface Signals . . . 23
Table 5 MDIO Management Interface Signals . . . 25
Table 6 QSPI Management Interface Signals . . . 26
Table 7 Reset Signals . . . 28
Table 8 LED and Debug Interface Signals . . . 29
Table 9 Miscellaneous Signals . . . 33
Table 10 Power Supply Pins for GPHY . . . 37
Table 11 Power Supply Pins for TPI (AFE) . . . 39
Table 12 Ground Pins . . . 40
Table 13 Not Connected Signals . . . 41
Table 14 Pin Names Used for Pin Strapping . . . 43
Table 15 Pin Strapping Configuration Description . . . 43
Table 16 MDIO Ready Timing . . . 46
Table 17 Supported Flash Memory Devices . . . 47
Table 18 Flash Command and Timing . . . 48
Table 19 GPIO Mapping . . . 49
Table 20 Supported Twisted Pair Mappings on a Cat 5 or Better Cable . . . 53
Table 21 Programming Sequence for the Wake-on-LAN Functionality . . . 54
Table 22 Low Power State Entry and Exit Sequence . . . 61
Table 23 Special Tag Ingress Format . . . 83
Table 24 Traffic Class Map Coding . . . 85
Table 25 Special Tag Egress Format . . . 85
Table 26 MDIO/MMD Devices Present in MxL86250C . . . 90
Table 27 Register Access Type . . . 93
Table 28 Registers Overview- Standard Management Registers . . . 94
Table 29 Registers Overview- PHY-specific Management Registers . . . 117
Table 30 Register Access Type . . . 135
Table 31 Registers Overview- Standard PMAPMD Registers . . . 136
Table 32 Registers Overview- Standard PCS Registers . . . 177
Table 33 Registers Overview- Standard Auto-Negotiation Registers . . . 197
Table 34 Registers Overview- Vendor Specific 1 Device Registers . . . 226
Table 35 Registers Overview- Vendor Specific 2 Device Registers . . . 244
Table 36 Absolute Maximum Ratings . . . 252
Table 37 Operating Range . . . 254
Table 38 Typical Power Consumption . . . 255
Table 39 Maximum Power Consumption . . . 255
Table 40 Maximum Current Per Rail . . . 256
Table 41 DC Characteristics of the GPIO Interfaces (VDDP = 3.3 V) . . . 257
Table 42 DC Characteristics of the GPIO Interfaces (VDDP = 1.8 V) . . . 257
Table 43 Temperature Sensor Characteristics . . . 258
Table 44 Power Supply Timings . . . 260
Table 45 AC Characteristics of Input Clock on XTAL1 Pin . . . 261
Table 46 AC Characteristics of the Power Supply . . . 261
Table 47 Timing Characteristics of the MDIO Slave Interface . . . 262
Table 48 QSPI Interface Timing Parameters . . . 263
Table 49 Test Interface Clock . . . 264

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

Table 50 JTAG Timing . . . 264
Table 51 Reference Clock Output Characteristics . . . 265
Table 52 Specification of the Crystal . . . 266
Table 53 Electrical Characteristics for Common-Mode Rejection and Termination Circuitry . . . 267
Table 54 Electrical Characteristics for Supported Transformers (Magnetics) . . . 268
Table 55 Electrical Characteristics for Supported RJ45 Plugs . . . 269
Table 56 JEDEC Thermal Resistance Package Parameter - Compact 2-R Model Network . . . 270
Table 57 Stress Force Package Parameter . . . 270
Table 58 Product and Package Naming . . . 272

The product (or products) mentioned in this data sheet are Not Recommended for New Designs (NRND)

Preface

This Data Sheet describes the features and system architecture of the Ethernet Switch MxL86250C, which is a 5-Port 2.5 Gigabit Ethernet Switch with 5 PHYs.

Document Conventions

In the interest of brevity, this document uses short names to represent full product names.

MxL86250C	Ethernet Switch MxL86250C

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

Document Information

This document's identifying information is:

Document Reference (Citation) Name

MxL86250C Ethernet Switch Data Sheet Rev. 1.4

File Name

`620957_MxL86250C_DS_Rev1.4.pdf`

Organization of this Document

- **Chapter 1, Product Overview**
  This chapter provides an overview of the MxL86250C.
- **Chapter 2, External Signals**
  This chapter provides a pinout of the MxL86250C device package.
- **Chapter 3, Functional Description**
  This chapter provides the functional description for the MxL86250C.
- **Chapter 4, MDIO and MMD Register Interface Description**
  This chapter describes the MDIO and MMD registers available to support the MxL86250C feature set.
- **Chapter 5, PHY MDIO Registers Detailed Description**
  This chapter describes the fields and reset values of the MDIO registers.
- **Chapter 6, PHY MMD Registers Detailed Description**
  This chapter describes the fields and reset values of the MMD registers.
- **Chapter 7, Electrical Characteristics**
  This chapter provides the electrical characteristics for the MxL86250C.
- **Chapter 8, Package Outline**
  This chapter provides a package outline for the MxL86250C.
- **Chapter 9, Product Ordering Information**
  This chapter provides the product ordering details for the MxL86250C.
- **Standards References**

1 Product Overview

The MxL86250C device is a highly integrated, low power, non-blocking multi-port Ethernet Switch. It offers a cost-optimized solution well-suited for switches. The MxL86250C has five integrated Ethernet BASE-T PHYs which support four data rates: 2500, 1000, 100, and 10 Mbps.

On the Ethernet Twisted Pair Interface (TPI), the MxL86250C is compliant with the standards from IEEE 802.3 referenced in [2]:

- 2.5GBASE-T (IEEE 802.3 Clause 126, NBASE-T)
- 1000BASE-T (IEEE 802.3 Clause 40)
- 100BASE-TX (IEEE 802.3 Clause 25)
- 10BASE-Te (IEEE 802.3 Clause 14)

This interface supports the Energy-Efficient Ethernet (EEE) feature to reduce idle mode power consumption. Power saving at the system level is also possible with the wake-on-LAN feature. A low-EMI line driver with integrated termination facilitates the PCB design.

With reference to the Open System Interconnection (OSI) model, the MxL86250C implements five layer 1 physical media access devices, a layer 2 switch, and an MDIO management interface.

Up to 1 MB embedded packet storage SRAM is integrated and 10 kB jumbo frames are supported. The MxL86250C integrates a 1K entry VLAN table for 802.1Q port-based, tag-based, and protocol-based VLAN operation. It also supports double VLAN tagging, insertion, removal, and translation. The MxL86250C features 16K VLAN-aware MAC addresses with 4-way hashing algorithm for address searching, auto-learning, and auto-aging.

A programmable packet parser and a powerful classification engine allow future-proof designs that enable various data traffic types. The MxL86250C supports IPv4 and IPv6 multicast forwarding, including IGMPv1/IGMPv2/IGMPv3 and MLDv1/MLDv2 snooping.

The MxL86250C features an advanced QoS architecture which prioritizes switch traffic for different classes of applications based on multiple fields of the packet. Multiple queues per port with strict or deficit weighted round robin scheduling and rate shaping are supported. It is possible to re-mark VLAN PCP and IP DSCP.

The MxL86250C supports a standard MDIO management interface as defined in IEEE 802.3 Clause 22 and Clause 45 [2]. The MDIO serial interface is operable with a clock running up to 25 MHz. It allows a management entity (the external chip implementing the MAC) to access standard MDIO/MMD registers to control the MxL86250C's behavior, or to read the link status. The MxL86250C is also configurable via pin strapping.

The MxL86250C is capable of driving up to 15 LEDs (three per BASE-T port). Each LED is independently programmable to indicate the link speed and traffic activities. Several indication schemes are selectable.

External supplies of 0.8 V, 1.2 V, 1.8 V, and 3.3 V are required to power the MxL86250C device.

The MxL86250C uses a ball grid array package (type BGA 18 x18 matrix, size 12 mm x 12 mm).

Data sheet are Not Recommended for New Designs (NDND)
The Product (or products) mentioned in this

1.1 Features

This section provides an overview of the features supported by the MxL86250C.

Communication Interfaces

- The five Ethernet BASE-T interfaces support:
  - Ethernet modes and standards
    2.5GBASE-T (IEEE 802.3, NBASE-T), 1000BASE-T (IEEE 802.3), 100BASE-TX (IEEE 802.3), and 10BASE-Te (IEEE 802.3)
  - Ethernet twisted pair copper cable of category Cat5 or higher
  - Low EMI voltage mode line driver with integrated termination resistors
  - Transformerless Ethernet for backplane applications
  - Auto-Negotiation (ANEG) with extended next page support
  - Auto-MDIX and polarity correction
  - Auto-Downspeed (ADS)
  - 100BASE-TX EEE, 1000BASE-T EEE, 2.5GBASE-T EEE, and power down mode
  - Cable diagnostics: cable open/short detection and cable length estimation
  - Wake-on-LAN (WoL)
  - Jumbo frames of up to 10 kB
- The management interface supports the communication between the Station Manager (STA, per IEEE 802.3) and the MxL86250C using:
  - A Management Data Input/Output (MDIO) slave interface providing access to the standard registers in the MMD
  - An MDIO interface clock of up to 25 MHz
  - 3 MDIO message frame types as described in IEEE 802.3: Clause 22, Clause 22 Extended, and Clause 45 [2]
- The Quad SPI master interface connecting to serial external Quad-SPI flash memory supports:
  - Programmable interface clock: maximum 101 MHz
  - Internal firmware code access from external Quad-SPI flash memory
  - Write access to the Quad-SPI flash memory
  - Different Quad-SPI flash memory sizes up to 512 MB
  - Secure firmware upgrade of the flash memory
- The JTAG interface supports:
  - Boundary scan
  - Test and debug interface
  - Shared pins with GPIO functions
- The LED interface supports:
  - Programmable LED
  - Up to three LEDs per BASE-T port
  - Single and dual color LEDs
  - Connection of LED to ground or 3.3 V
  - Several LED indication schemes (link/activity, duplex/collision, and link speed)
  - Configuration of LED indication via MDIO registers
  - Control of LED brightness via software driver API
  - Alternative configuration of LED pins as GPIO for custom indication
- Supports two external interrupts:
  - Configurable as output to an external controller
  - Configurable as input from external device(s)
  - Configurable edge, level, and polarity

Clocking and Timing Features

- The input reference clock options are:

Data sheet are Not Recommended for New Designs (NRND)
File Product (or products) mentioned in this

  - 25 MHz crystal operation
  - 25 MHz direct from an external oscillator
  - An external CML/LVPECL reference clock operating at 50 MHz
- The output reference clock options are two pairs of differential clocks at 50 MHz, and the same frequency as the input reference clock.

Ethernet MACs

- Ethernet MACs for each BASE-T port, complying with IEEE 802.3:
  - Quad rate, that is, 10 Mbps, 100 Mbps, 1000 Mbps, or 2.5 Gbps operation speed for internal PHY
  - Half-duplex operation mode for 10 Mbps and 100 Mbps
  - Full-duplex operation mode for all speeds
- Enhanced frame size support (Jumbo frames, programmable limit up to 10 Kbyte)
- 802.3X flow control (pause frame) and 802.1Qbb flow control (PFC pause frame) in full-duplex mode. Backpressure (forced collisions) in half-duplex mode.
- Frame padding on egress traffic
- Minimum and maximum frame length check
- Frame Check Sequence (FCS) verification and stripping
- FCS generation and insertion/replacement
- Low Power Idle (LPI) mode as defined by IEEE 802.3 EEE

Packet Processing

- L2 bridging
  - 16K entry VLAN-aware MAC address table
  - Shared and independent VLAN learning
  - Layer 2 security: IEEE 802.1X port authentication, MAC address filtering, port locking and spoofing detection, MAC address limiting, and broadcast storm control
  - Multiple spanning tree protocol
  - MAC in MAC tunneling (802.1ah), 256 tunnels
- L3 multicast forwarding at virtual-interface level
  - 1K entry VLAN aware IP multicast group table
  - Any Source Multicast (ASM) and Source Specific Multicast (SSM)
  - IPv4 IGMPv1/IGMPv2/IGMPv3 and IPv6 MLDv1/MLDv2 with software/firmware involvement
- VLAN classification
  - 802.1Q, 802.1Q QinQ, 802.1Qbg
  - 1K entry VLAN filtering
  - 1K entry extended VLAN tagging operation with sophisticated single tag and double tag VLAN mapping and translation
  - Private VLAN
- Traffic flow classification (ACL)
  - Programmable packet parsing
  - 512 entry traffic flow classification table
  - 32 concurrent keys with 1k bits in each entry
    Support bit mask and range for some of the keys. Keys include the source port information, packet length, and multiple L2/L3/L4/L4+ packet fields.
  - Multiple concurrent policy actions in each entry
    Destination port(s) assignment (including discard option), port filtering, traffic class assignment, traffic meter assignment, extended VLAN tagging operation assignment, MAC in MAC tunnel assignment, flow counter assignment, OAM handling assignment, cross VLAN policy, cross state policy, color assignment, Link Aggregation Group (LAG) assignment, L2 MAC address learning policy, and interrupt policy
- Advanced QoS
  - Up to 1 MB packet buffer

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

  - Total 128 priority queues, up to eight priority queues per port
  - Flexible traffic class assignment
  - Flexible priority marking and re-marking
  - Flexible color marking and re-marking
  - Traffic metering on ingress and/or egress traffic
    srTCM and trTCM,128 meters
  - Per port and per queue shaping
  - Strict priority and DWRR scheduling
- Operation, Maintenance, and Management
  - Packets and bytes counters per MAC, per port, per virtual interface, and per traffic flow
  - Packet mirroring (ingress and egress mirroring to a designated port)
  - Loop detection support with software/firmware involvement
  - Loop-back support
  - IEEE 802.1ag and ITU-T Y.1731 Ethernet OAM delay and loss measurement hardware support
  - LAG support
    32 groups, up to 64 ports or virtual interfaces in a LAG

Other Features

- Temperature Sensor (warning, interrupt, reset, and auto-downspeed)

Power Supply

- 3.3 V, 1.8 V, 1.2 V, and 0.8 V external power sources

1.2 Applications

This section lists the supported modes of operation.


- Unmanaged mode, whereby no reconfiguration during runtime is necessary. MxL86250C-based devices work out of the box with their basic or default feature set. The Flash Configuration Area (FCA) must be used to change the default configuration. The FCA is an area in the flash memory which can be used to realize a limited static functionality set that differs from the default configuration. The FCA is described in [1].
- MDIO-managed mode, whereby the configuration of a lot of features is offered by means of an API via the slave MDIO interface. Contact MaxLinear for access to the API documentation. Pre-configuration of the features in the FCA is also supported.

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

1.3 Block Diagram

Figure 1 shows the block diagram of the MxL86250C. The main interfaces are:

- Slave control interface driven by a SoC processor, using MDIO slave
- Interrupt signal MDINT allowing the MxL86250C to notify the external processor about a change of status
- LED control
- Twisted pair interfaces (TPI)
- Master Quad Serial Peripheral Interface (QSPI) interface

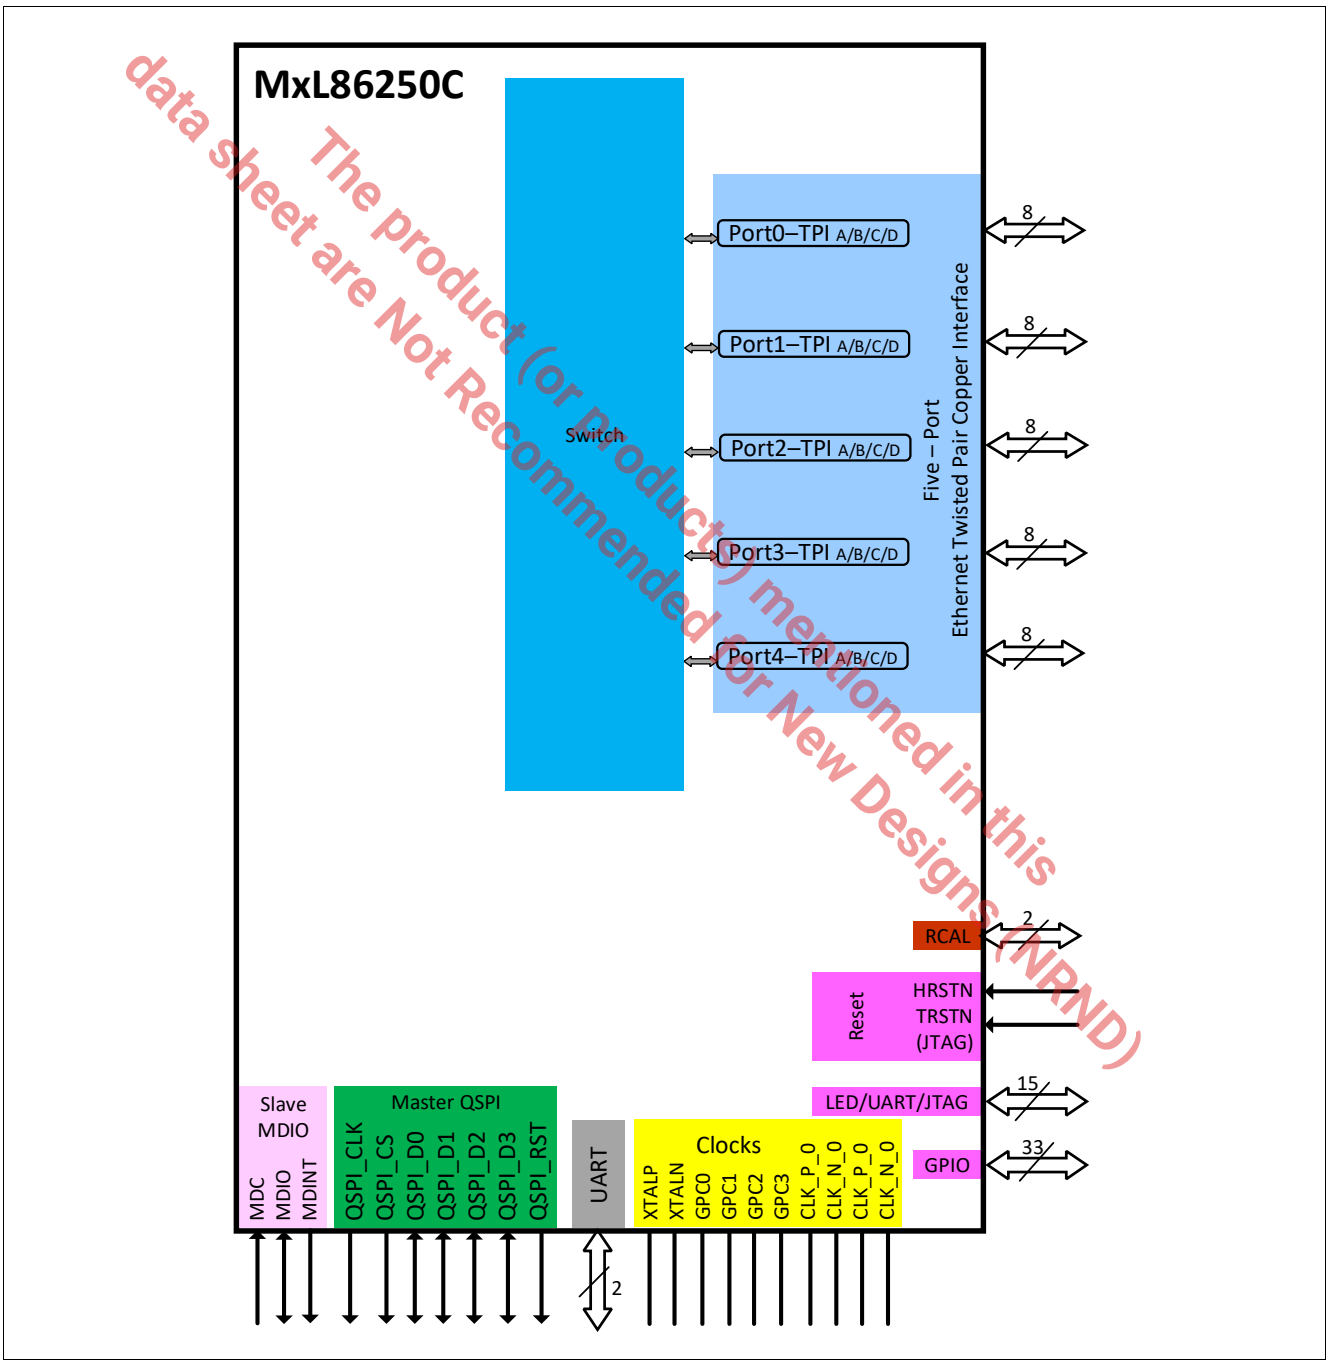

data sheet are Not Recommended for New Designs (NPND)
The product (or product(s) mentioned in this


Figure 1 MxL86250C Block Diagram

2 External Signals

This chapter describes the signal mapping to the package.

2.1 Logic Symbol

Figure 2 gives an overview of the device's external interfaces.

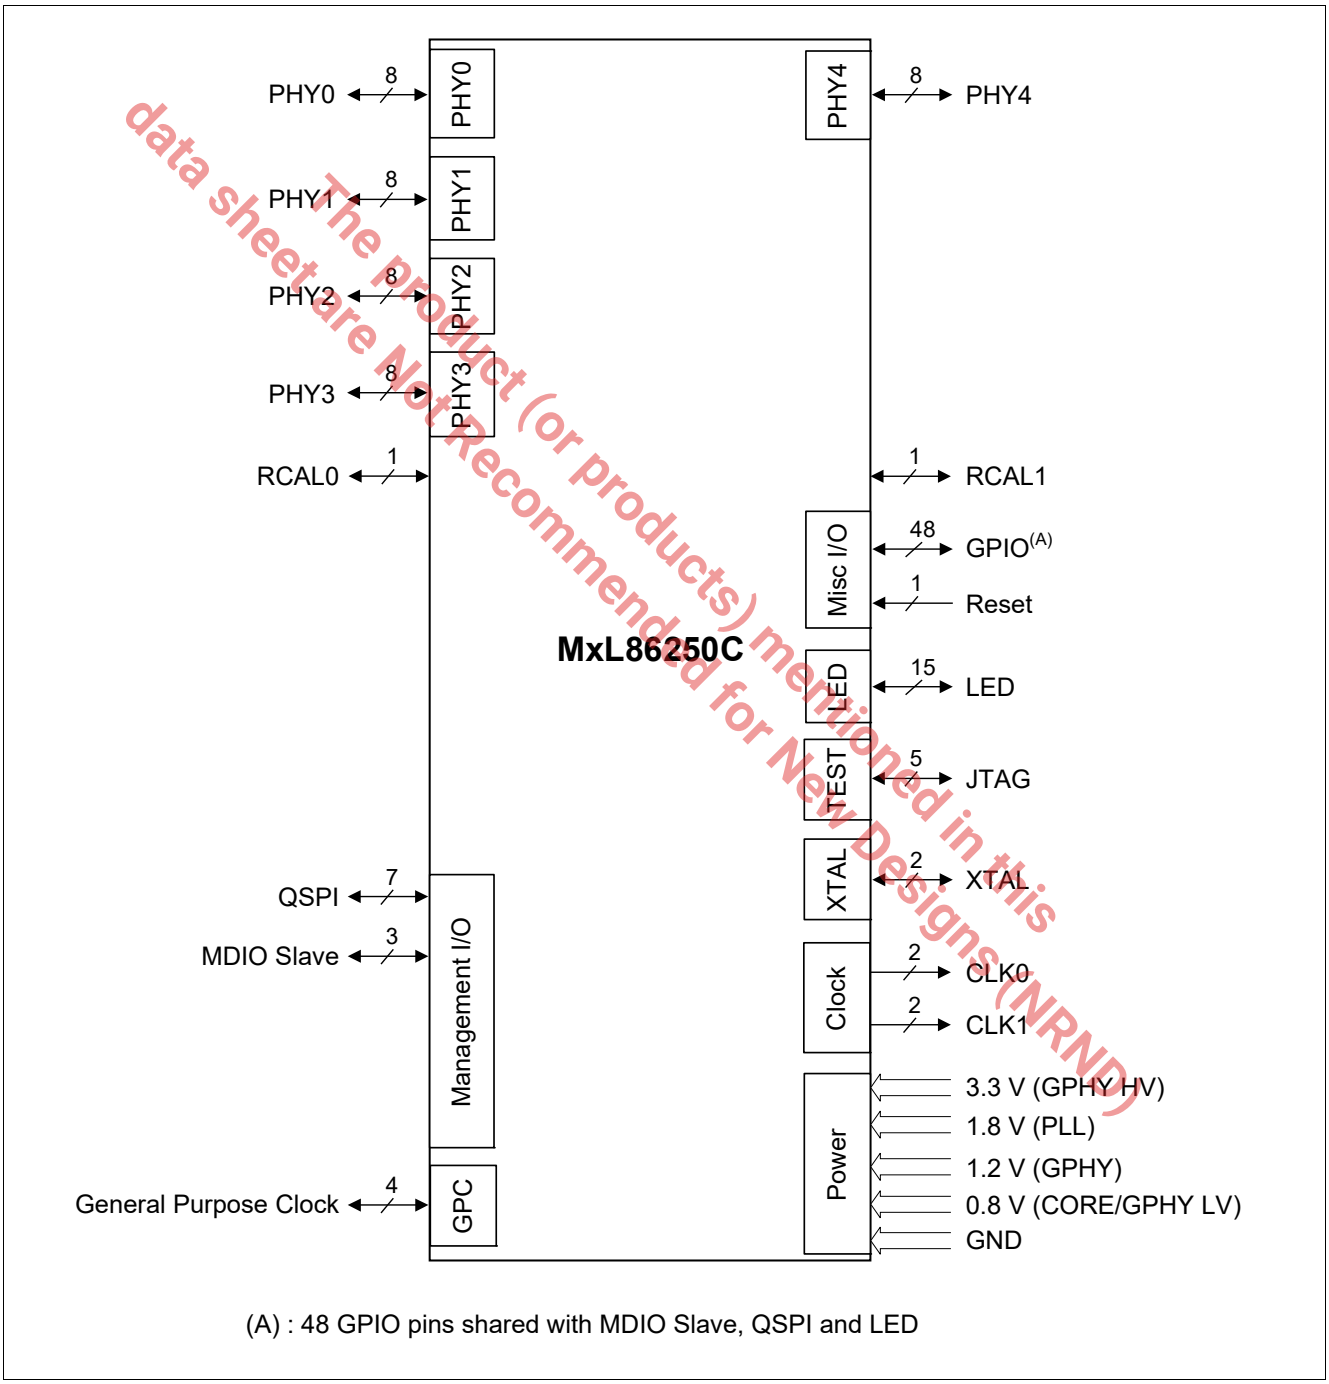

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

Figure 2 MxL86250C External Signal Overview

2.2 External Signal Description

This section provides the ball diagram, abbreviations for pin types and buffer types, and the table of input and output signals.


2.2.1 Ball Diagram

Figure 3 shows the ball diagram. **Table 1** lists the ball diagram color codes.

Table 1 Ball Diagram Color Codes

Color	Description
White	Unpopulated Balls
Red	Power
Orange	MDIO Signals
Grey	Ground
Blue	TPI-related Signals
Pink	QSPI, Reset Signals
Light Green	Clock, GPIO Signals
Light Blue	LED, JTAG Signals
Yellow	NC

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

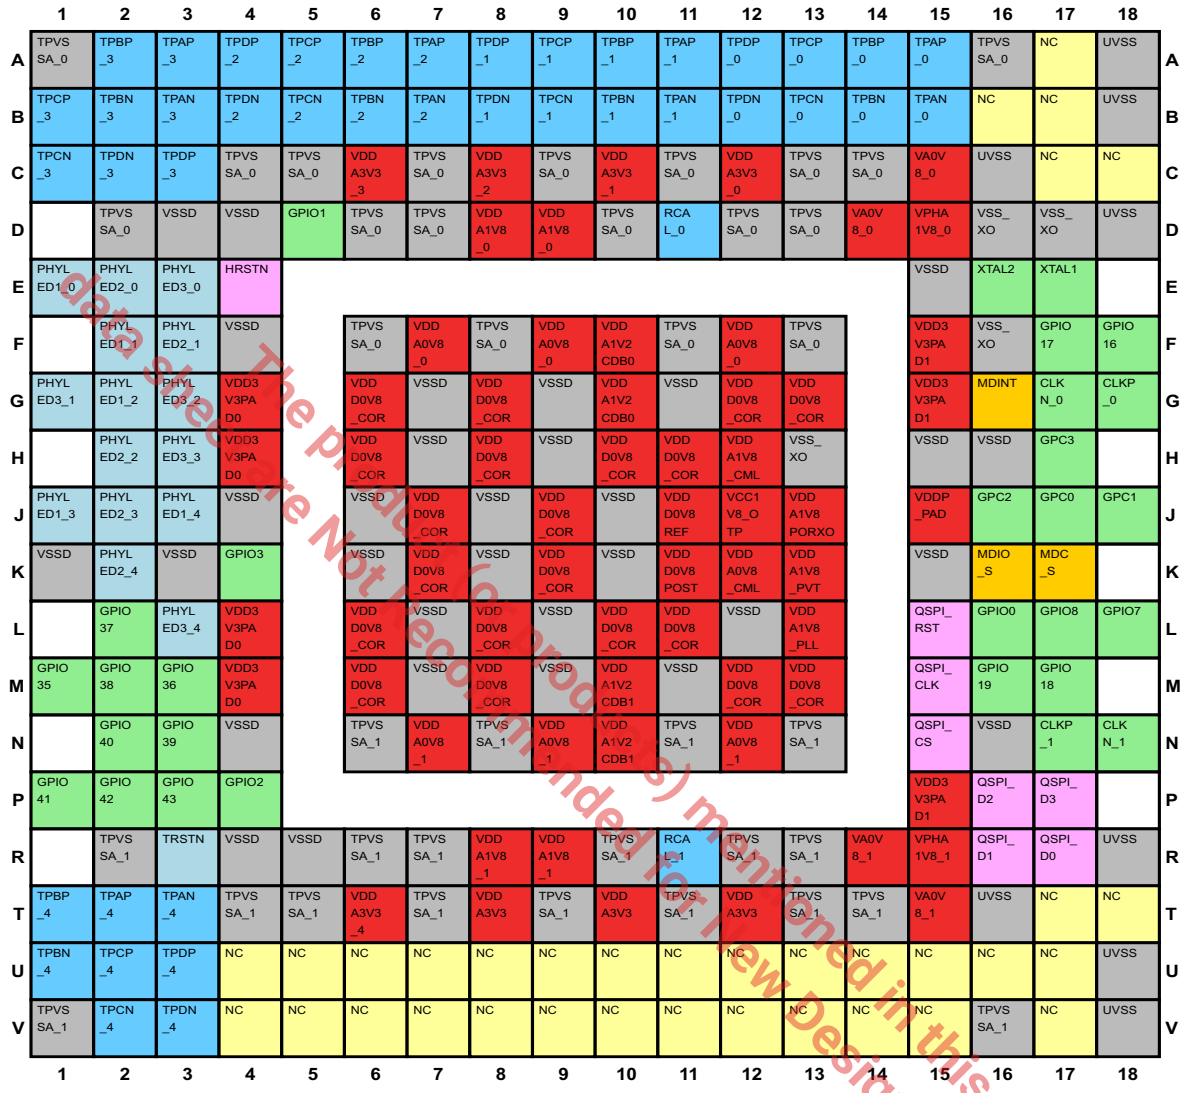

data sheet are Not Recommended for New Designs (NRND)
The product(s) mentioned in this

Figure 3 Ball Diagram for PG-FCLBGA-277 (Top View)

2.2.2 Abbreviations

Table 2 and Table 3 summarize the abbreviations used in the signal tables.

Table 2 Abbreviations for Pin Type

Abbreviations	Description
I	Input-only, digital levels
O	Output-only, digital levels
I/O	Bidirectional input/output signal, digital levels
Prg	Bidirectional pin, programmable to operate either as input or output, digital levels
AI	Input-only, analog levels
AO	Output-only, analog levels
AI/AO	Bidirectional, analog levels
PWR	Power
GND	Ground

Table 3 Abbreviations for Buffer Type

Abbreviations	Description
A	Analog characteristics, see the AC/DC specification for more information.
Prg	Programmable (open-drain/push-pull, pull-up/pull-down characteristic are programmable)
PU	Pull up (internal, weak)

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

2.2.3 Input/Output Signals

Table 4 to Table 13 provide a detailed description of all the pins.

2.2.3.1 Ethernet Twisted Pair Interface

Unused TPI signals must be unconnected.

Table 4 Ethernet Twisted Pair Interface Signals

Ball No.	Name	Pin Type	Buffer Type	Function
Ethernet Port Twisted Pair Interface				
A15	**TPAP_0**	AI/AO	A	**Port 0 Transmit/Receive Positive/Negative**
B15	**TPAN_0**	AI/AO	A	
A14	**TPBP_0**	AI/AO	A	
B14	**TPBN_0**	AI/AO	A	
A13	**TPCP_0**	AI/AO	A	
B13	**TPCN_0**	AI/AO	A	
A12	**TPDP_0**	AI/AO	A	
B12	**TPDN_0**	AI/AO	A	
A11	**TPAP_1**	AI/AO	A	**Port 1 Transmit/Receive Positive/Negative**
B11	**TPAN_1**	AI/AO	A	
A10	**TPBP_1**	AI/AO	A	
B10	**TPBN_1**	AI/AO	A	
A9	**TPCP_1**	AI/AO	A	
B9	**TPCN_1**	AI/AO	A	
A8	**TPDP_1**	AI/AO	A	
B8	**TPDN_1**	AI/AO	A	
A7	**TPAP_2**	AI/AO	A	**Port 2 Transmit/Receive Positive/Negative**
B7	**TPAN_2**	AI/AO	A	
A6	**TPBP_2**	AI/AO	A	
B6	**TPBN_2**	AI/AO	A	
A5	**TPCP_2**	AI/AO	A	
B5	**TPCN_2**	AI/AO	A	
A4	**TPDP_2**	AI/AO	A	
B4	**TPDN_2**	AI/AO	A	
A3	**TPAP_3**	AI/AO	A	**Port 3 Transmit/Receive Positive/Negative**
B3	**TPAN_3**	AI/AO	A	
A2	**TPBP_3**	AI/AO	A	
B2	**TPBN_3**	AI/AO	A	
B1	**TPCP_3**	AI/AO	A	
C1	**TPCN_3**	AI/AO	A	
C3	**TPDP_3**	AI/AO	A	

data sheet are not Recommended for New Designs (NRND)
The product (or products) mentioned in this

Table 4 Ethernet Twisted Pair Interface Signals (cont'd)

Ball No.	Name	Pin Type	Buffer Type	Function
C2	**TPDN_3**	AI/AO	A	
T2	**TPAP_4**	AI/AO	A	**Port 4 Transmit/Receive Positive/Negative**
T3	**TPAN_4**	AI/AO	A	
T1	**TPBP_4**	AI/AO	A	
U1	**TPBN_4**	AI/AO	A	
U2	**TPCP_4**	AI/AO	A	
V2	**TPCN_4**	AI/AO	A	
U3	**TPDP_4**	AI/AO	A	
V3	**TPDN_4**	AI/AO	A	
Ethernet Port Test Point				
D11	**RCAL_0**	AI/AO	A	**Test Point for GPHY Ethernet Ports 0 to 3** Test point, do not connect.
R11	**RCAL_1**	AI/AO	A	**Test Point for GPHY Ethernet Ports 4** Test point, do not connect.

The product (or products) mentioned in this data sheet are Not Recommended for New Designs (NRND)

2.2.3.2 MDIO Interface

Table 5 MDIO Management Interface Signals

Ball No.	Name	Pin Type	Buffer Type	Function
MDIO Slave Interface				
G16	**MDINT**	O	Prg	**MDIO Interrupt from Any GPHY** The interrupt interrupts an external block such as a higher-level management entity or a device controller of an SoC, on detection of certain events and states inside the GPHY device. Voltage Domain: 1.8 V / 3.3 V
	GPIO4	Prg		**General Purpose IO 4** Either input or output mode. The output characteristic is either open drain or push-pull. Voltage Domain: 1.8 V / 3.3 V
K17	**MDC_S**	I	Prg	**MDIO Slave Clock** The external controller provides the serial clock of up to 25 MHz on this input. Voltage Domain: 1.8 V / 3.3 V
	GPIO5	Prg		**General Purpose IO 5** Either input or output mode. The output characteristic is either open drain or push-pull. Voltage Domain: 1.8 V / 3.3 V
K16	**MDIO_S**	I/O	Prg	**MDIO Slave Data Input/Output** The external controller uses this signal to address internal registers and to transfer data to and from the internal registers. Voltage Domain: 1.8 V / 3.3 V
	GPIO6	Prg		**General Purpose IO 6** Either input or output mode. The output characteristic is either open drain or push-pull. Voltage Domain: 1.8 V / 3.3 V

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

2.2.3.3 QSPI Interface

Table 6 QSPI Management Interface Signals

Ball No.	Name	Pin Type	Buffer Type	Function
R17	**QSPI_D0**	I/O	Prg	**QSPI Data 0** QSPI interface data 0 Voltage Domain: 3.3 V
	GPIO9	Prg	**General Purpose IO 9** Either input or output mode. The output characteristic is either open drain or push-pull. Voltage Domain: 3.3 V
R16	**QSPI_D1**	I/O	Prg	**QSPI Data 1** QSPI interface data 1 Voltage Domain: 3.3 V
	GPIO10	Prg	**General Purpose IO 10** Either input or output mode. The output characteristic is either open drain or push-pull. Voltage Domain: 3.3 V
P16	**QSPI_D2**	I/O	Prg	**QSPI Data 2** QSPI interface data 2 Voltage Domain: 3.3 V
	GPIO11	Prg	**General Purpose IO 11** Either input or output mode. The output characteristic is either open drain or push-pull. Voltage Domain: 3.3 V
P17	**QSPI_D3**	I/O	Prg	**QSPI Data 3** QSPI interface data 3 Voltage Domain: 3.3 V
	GPIO12	Prg	**General Purpose IO 12** Either input or output mode. The output characteristic is either open drain or push-pull. Voltage Domain: 3.3 V
M15	**QSPI_CLK**	O	Prg	**QSPI Clock** QSPI interface clock output Voltage Domain: 3.3 V
	GPIO13	Prg		**General Purpose IO 13** Either input or output mode. The output characteristic is either open drain or push-pull. Voltage Domain: 3.3 V

The product (or products) mentioned in this data sheet are Not Recommended for New Designs (NRND)

Table 6 QSPI Management Interface Signals (cont'd)

Ball No.	Name	Pin Type	Buffer Type	Function
N15	**QSPI_CS**	O	Prg	**QSPI Chip Select** QSPI interface chip select Voltage Domain: 3.3 V
	GPIO14	Prg		**General Purpose IO 14** Either input or output mode. The output characteristic is either open drain or push-pull. Voltage Domain: 3.3 V
L15	**QSPI_RST**	O	Prg	**QSPI Reset** QSPI Reset Voltage Domain: 3.3 V
	GPIO15	Prg		**General Purpose IO 15** Either input or output mode. The output characteristic is either open drain or push-pull. Voltage Domain: 3.3 V

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

2.2.3.4 Reset Interface

Table 7 Reset Signals

Ball No.	Name	Pin Type	Buffer Type	Function
E4	**HRSTN**	I	PU	**Hardware Reset** Asynchronous active low device reset Voltage Domain: 3.3 V

The product (or products) mentioned in this data sheet are Not Recommended for New Designs (NRND)

2.2.3.5 LED/UART/JTAG Interface

Table 8 LED and Debug Interface Signals

Ball No.	Name	Pin Type	Buffer Type	Function
LED Signals				
E1	**PHYLED1_0**	I/O		**GPHY LED1 for Port 0** LED control output, drives single-color or dual color LEDs. Voltage Domain: 3.3 V
	GPIO20	Prg	Prg	**General Purpose IO 20** Either input or output mode. The output characteristic is either open drain or push-pull. Voltage Domain: 3.3 V
	FW_UTXD	O		**Firmware UART Data Output** Firmware UART interface data output Voltage Domain: 3.3 V
E2	**PHYLED2_0**	I/O		**GPHY LED2 for Port 0** LED control output, drives single-color or dual color LEDs. Voltage Domain: 3.3 V
	GPIO21	Prg	Prg	**General Purpose IO 21** Either input or output mode. The output characteristic is either open drain or push-pull. Voltage Domain: 3.3 V
	FW_URXD	I		**Firmware UART Data Input** Firmware UART interface data input Voltage Domain: 3.3 V
E3	**PHYLED3_0**	I/O		**GPHY LED3 for Port 0** LED control output, drives single-color or dual color LEDs. Voltage Domain: 3.3 V
	GPIO22	Prg	Prg	**General Purpose IO 22** Either input or output mode. The output characteristic is either open drain or push-pull. Voltage Domain: 3.3 V
F2	**PHYLED1_1**	I/O		**GPHY LED1 for Port 1** LED control output, drives single-color or dual color LEDs. Voltage Domain: 3.3 V
	GPIO23	Prg	Prg	**General Purpose IO 23** Either input or output mode. The output characteristic is either open drain or push-pull. Voltage Domain: 3.3 V
	FW_UTXD	O		**Firmware UART Data Output** Firmware UART interface data output Voltage Domain: 3.3 V

The product (or products) mentioned in this datasheet are Not Recommended for New Designs (NRND)

Table 8 LED and Debug Interface Signals (cont'd)

Ball No.	Name	Pin Type	Buffer Type	Function
F3	**PHYLED2_1**	I/O		**GPHY LED2 for Port 1** LED control output, drives single-color or dual color LEDs. Voltage Domain: 3.3 V
	GPIO24	Prg	Prg	**General Purpose IO 24** Either input or output mode. The output characteristic is either open drain or push-pull. Voltage Domain: 3.3 V
G1	**PHYLED3_1**	I/O		**GPHY LED3 for Port 1** LED control output, drives single-color or dual color LEDs. Voltage Domain: 3.3 V
	GPIO25	Prg	Prg	**General Purpose IO 25** Either input or output mode. The output characteristic is either open drain or push-pull. Voltage Domain: 3.3 V
G2	**PHYLED1_2**	I/O		**GPHY LED1 for Port 2** LED control output, drives single-color or dual color LEDs. Voltage Domain: 3.3 V
	GPIO26	Prg	Prg	**General Purpose IO 26** Either input or output mode. The output characteristic is either open drain or push-pull. Voltage Domain: 3.3 V
	TDI	I		**JTAG Serial Test Data Input** Voltage Domain: 3.3 V *Note: No external pull-up required.*
	FW_UTXD	O		**Firmware UART Data Output** Firmware UART interface data output Voltage Domain: 3.3 V
H2	**PHYLED2_2**	I/O		**GPHY LED2 for Port 2** LED control output, drives single-color or dual color LEDs. Voltage Domain: 3.3 V
	GPIO27	Prg	Prg	**General Purpose IO 27** Either input or output mode. The output characteristic is either open drain or push-pull. Voltage Domain: 3.3 V
	TMS	I		**JTAG Test Mode Select** Voltage Domain: 3.3 V *Note: No external pull-up required.*
G3	**PHYLED3_2**	I/O		**GPHY LED3 for Port 2** LED control output, drives single-color or dual color LEDs. Voltage Domain: 3.3 V
	GPIO28	Prg	Prg	**General Purpose IO 28** Either input or output mode. The output characteristic is either open drain or push-pull. Voltage Domain: 3.3 V

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

Table 8 LED and Debug Interface Signals (cont'd)

Ball No.	Name	Pin Type	Buffer Type	Function
J1	**PHYLED1_3**	I/O		**GPHY LED1 for Port 3** LED control output, drives single-color or dual color LEDs. Voltage Domain: 3.3 V
	GPIO29	Prg	Prg	**General Purpose IO 29** Either input or output mode. The output characteristic is either open drain or push-pull. Voltage Domain: 3.3 V
	TCK	I		**JTAG Test Clock** The signals TDI, TDO, and TMS are synchronous, subject to this JTAG test clock. Voltage Domain: 3.3 V
	FW_UTXD	O		**Firmware UART Data Output** Firmware UART interface data output Voltage Domain: 3.3 V
J2	**PHYLED2_3**	I/O		**GPHY LED2 for Port 3** LED control output, drives single-color or dual color LEDs. Voltage Domain: 3.3 V
	GPIO30	Prg	Prg	**General Purpose IO 30** Either input or output mode. The output characteristic is either open drain or push-pull. Voltage Domain: 3.3 V
	TDO	I/O		**JTAG Serial Test Data Output** JTAG test data output. Voltage Domain: 3.3 V *Note: No external pull-up required.*
H3	**PHYLED3_3**	I/O		**GPHY LED3 for Port 3** LED control output, drives single-color or dual color LEDs. Voltage Domain: 3.3 V
	GPIO31	Prg	Prg	**General Purpose IO 31** Either input or output mode. The output characteristic is either open drain or push-pull. Voltage Domain: 3.3 V
J3	**PHYLED1_4**	I/O		**GPHY LED1 for Port 4** LED control output, drives single-color or dual color LEDs. Voltage Domain: 3.3 V
	GPIO32	Prg	Prg	**General Purpose IO 32** Either input or output mode. The output characteristic is either open drain or push-pull. Voltage Domain: 3.3 V
	FW_UTXD	O		**Firmware UART Data Output** Firmware UART interface data output Voltage Domain: 3.3 V

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

Table 8 LED and Debug Interface Signals (cont'd)

Ball No.	Name	Pin Type	Buffer Type	Function
K2	**PHYLED2_4**	I/O		**GPHY LED2 for Port 4** LED control output, drives single-color or dual color LEDs. Voltage Domain: 3.3 V
	GPIO33	Prg	Prg	**General Purpose IO 33** Either input or output mode. The output characteristic is either open drain or push-pull. Voltage Domain: 3.3 V
L3	**PHYLED3_4**	I/O		**GPHY LED3 for Port 4** LED control output, drives single-color or dual color LEDs. Voltage Domain: 3.3 V
	GPIO34	Prg	Prg	**General Purpose IO 34** Either input or output mode. The output characteristic is either open drain or push-pull. Voltage Domain: 3.3 V
R3	**TRSTN**	I		**JTAG Test Enabling** At logic HIGH, the GPIO pins are used as JTAG interface (TCK, TDI, TDO, and TMS). At logic LOW, the GPIO pins are used in their normal application mode. Voltage Domain: 3.3 V

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

2.2.3.6 Miscellaneous Signals

Table 9 Miscellaneous Signals

Ball No.	Name	Pin Type	Buffer Type	Function
Reset and Clocking				
E17	**XTAL1**	AI	A	**Crystal: Oscillator Input** A crystal must be connected between XTAL1 and XTAL2. Additional load capacitances must tie both pins to GND.
	CLK	AI	A	**Crystal Oscillator: Clock Input** A clock of 25 or 50 MHz must be connected to CLK. See Section 7.7.2 for the clock details. XTAL2 must not be connected.
E16	**XTAL2**	AO	A	**Crystal: Oscillator Output** A crystal must be connected between XTAL1 and XTAL2. Additional load capacitances must tie both pins to GND.
G18	**CLKP_0**	AO	A	**Differential Reference Clock Output 0** These pins provide the 25, or 50 MHz differential reference clock used for a clock slave device.
G17	**CLKN_0**	AO	A	**Differential Reference Clock Output 0** These pins provide the 25, or 50 MHz differential reference clock used for a clock slave device.
N17	**CLKP_1**	AO	A	**Differential Reference Clock Output 1** These pins provide the 25, or 50 MHz differential reference clock used for a clock slave device.
N18	**CLKN_1**	AO	A	**Differential Reference Clock Output 1** These pins provide the 25, or 50 MHz differential reference clock used for a clock slave device.
J17	**GPC0**	Prg		**General Purpose Clock 0** General purpose clock for external devices. Either input or output mode. Voltage Domain: 3.3 V
	GPIO44	Prg	Prg	**General Purpose IO 44** Either input or output mode. The output characteristic is either open drain or push-pull. Voltage Domain: 3.3 V
	WSP_UTXD	Prg	Prg	**Software UART Data Output** Voltage Domain: 3.3 V

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

Table 9 Miscellaneous Signals (cont'd)

Ball No.	Name	Pin Type	Buffer Type	Function
J18	**GPC1**	Prg		**General Purpose Clock 1** General purpose clock for external devices. Either input or output mode. Voltage Domain: 3.3 V
	GPIO45	Prg	Prg	**General Purpose IO 45** Either input or output mode. The output characteristic is either open drain or push-pull. Voltage Domain: 3.3 V
	WSP_UTXD	Prg	Prg	**Software UART Data Output** Voltage Domain: 3.3 V
J16	**GPC2**	Prg		**General Purpose Clock 2** General purpose clock for external devices. Either input or output mode. Voltage Domain: 3.3 V
	GPIO46	Prg	Prg	**General Purpose IO 46** Either input or output mode. The output characteristic is either open drain or push-pull. Voltage Domain: 3.3 V
	WSP_URXD	Prg	Prg	**Software UART Data Input** Voltage Domain: 3.3 V
H17	**GPC3**	Prg		**General Purpose Clock 3** General purpose clock for external devices. Either input or output mode. Voltage Domain: 3.3 V
	GPIO47	Prg	Prg	**General Purpose IO 47** Either input or output mode. The output characteristic is either open drain or push-pull. Voltage Domain: 3.3 V
L16	**GPIO0**	Prg	Prg	**General Purpose IO 0** Either input or output mode. The output characteristic is either open drain or push-pull. Voltage Domain: 1.8 V / 3.3 V
	EXTINT0	Prg	Prg	**External Interrupt 0** Voltage Domain: 1.8 V / 3.3 V
D5	**GPIO1**	Prg	Prg	**General Purpose IO 1** Either input or output mode. The output characteristic is either open drain or push-pull. Voltage Domain: 3.3 V
	EXTINT1	Prg	Prg	**External Interrupt 1** Voltage Domain: 3.3 V
	WSP_URXD	Prg	Prg	**Software UART Data Input** Voltage Domain: 3.3 V

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

Table 9 Miscellaneous Signals (cont'd)

Ball No.	Name	Pin Type	Buffer Type	Function
P4	**GPIO2**	Prg	Prg	**General Purpose IO 2** Either input or output mode. The output characteristic is either open drain or push-pull. Voltage Domain: 3.3 V
K4	**GPIO3**	Prg	Prg	**General Purpose IO 3** Either input or output mode. The output characteristic is either open drain or push-pull. Voltage Domain: 3.3 V
L18	**GPIO7**	Prg	Prg	**General Purpose IO 7** Either input or output mode. The output characteristic is either open drain or push-pull. Voltage Domain: 1.8 V / 3.3 V
L17	**GPIO8**	Prg	Prg	**General Purpose IO 8** Either input or output mode. The output characteristic is either open drain or push-pull. Voltage Domain: 1.8 V / 3.3 V
F18	**GPIO16**	Prg	Prg	**General Purpose IO 16** Either input or output mode. The output characteristic is either open drain or push-pull. Voltage Domain: 3.3 V
F17	**GPIO17**	Prg	Prg	**General Purpose IO 17** Either input or output mode. The output characteristic is either open drain or push-pull. Voltage Domain: 3.3 V
M17	**GPIO18**	Prg	Prg	**General Purpose IO 18** Either input or output mode. The output characteristic is either open drain or push-pull. Voltage Domain: 3.3 V
M16	**GPIO19**	Prg	Prg	**General Purpose IO 19** Either input or output mode. The output characteristic is either open drain or push-pull. Voltage Domain: 3.3 V
M1	**GPIO35**	Prg	Prg	**General Purpose IO 35** Either input or output mode. The output characteristic is either open drain or push-pull. Voltage Domain: 3.3 V
M3	**GPIO36**	Prg	Prg	**General Purpose IO 36** Either input or output mode. The output characteristic is either open drain or push-pull. Voltage Domain: 3.3 V
L2	**GPIO37**	Prg	Prg	**General Purpose IO 37** Either input or output mode. The output characteristic is either open drain or push-pull. Voltage Domain: 3.3 V

datasheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

Table 9 Miscellaneous Signals (cont'd)

Ball No.	Name	Pin Type	Buffer Type	Function
M2	**GPIO38**	Prg	Prg	**General Purpose IO 38** Either input or output mode. The output characteristic is either open drain or push-pull. Voltage Domain: 3.3 V
N3	**GPIO39**	Prg	Prg	**General Purpose IO 39** Either input or output mode. The output characteristic is either open drain or push-pull. Voltage Domain: 3.3 V
N2	**GPIO40**	Prg	Prg	**General Purpose IO 40** Either input or output mode. The output characteristic is either open drain or push-pull. Voltage Domain: 3.3 V
P1	**GPIO41**	Prg	Prg	**General Purpose IO 41** Either input or output mode. The output characteristic is either open drain or push-pull. Voltage Domain: 3.3 V
P2	**GPIO42**	Prg	Prg	**General Purpose IO 42** Either input or output mode. The output characteristic is either open drain or push-pull. Voltage Domain: 3.3 V
P3	**GPIO43**	Prg	Prg	**General Purpose IO 43** Either input or output mode. The output characteristic is either open drain or push-pull. Voltage Domain: 3.3 V

datasheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

2.2.3.7 Power Supply for GPHY

Table 10 Power Supply Pins for GPHY

Ball No.	Name	Pin Type	Buffer Type	Function
C12	**VDDA3V3_0**	PWR		**GPHY 0 High Voltage Domain Supply** This is the PHY 0 AFE 3.3 V supply.
C10	**VDDA3V3_1**	PWR		**GPHY 1 High Voltage Domain Supply** This is the PHY 1 AFE 3.3 V supply.
C8	**VDDA3V3_2**	PWR		**GPHY 2 High Voltage Domain Supply** This is the PHY 2 AFE 3.3 V supply.
C6	**VDDA3V3_3**	PWR		**GPHY 3 High Voltage Domain Supply** This is the PHY 3 AFE 3.3 V supply.
T6	**VDDA3V3_4**	PWR		**GPHY 4 High Voltage Domain Supply** This is the PHY 4 AFE 3.3 V supply.
T8, T10, T12	**VDDA3V3**	PWR		**High Voltage Domain Supply**
D8	**VDDA1V8_0**	PWR		**GPHY 0, 1, 2, 3 AFE Voltage Domain Supply** This is the 1.8 V supply for PHY 0 to PHY 3 AFE voltage domain. It supplies mixed signal blocks in the AFE.
R8	**VDDA1V8_1**	PWR		**GPHY 4 AFE Voltage Domain Supply** This is the 1.8 V supply for PHY 4 AFE voltage domain. It supplies mixed signal blocks in the AFE.
F7, F12	**VDDA0V8_0**	PWR		**GPHY 0, 1, 2, 3 Low Voltage Domain Supply** This is the supply for PHY 0 to PHY 3 low voltage domain. It supplies mixed signal blocks in the AFE.
N7, N12	**VDDA0V8_1**	PWR		**GPHY 4 Low Voltage Domain Supply** This is the supply for PHY 4 low voltage domain. It supplies mixed signal blocks in the AFE.
G4, H4, L4, M4	**VDD3V3PAD0**	PWR		**Power Supply Digital Domain 3.3 V** 3.3 V Voltage Digital Power Supply
F15, G15, P15	**VDD3V3PAD1**	PWR		**Power Supply Digital Domain 3.3 V** 3.3 V Voltage Digital Power Supply
J15	**VDDP_PAD**	PWR		**Power Supply Digital Domain 1.8 V / 3.3 V** 3.3 V or 1.8 V Pad Voltage Digital Power Supply based on pin strapping.

datasheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

Table 10 Power Supply Pins for GPHY (cont'd)

Ball No.	Name	Pin Type	Buffer Type	Function
G6, H6, G8, H8, H10, H11, G12, G13, J7, K7, J9, K9, L6, M6, L8, M8, L10, L11, M12, M13	**VDDD0V8_COR**	PWR		**Power Supply Digital Domain 0.8 V** 0.8 V Core Voltage Digital Power Supply
J13	**VDDA1V8PORXO**	PWR		**Power Supply Domain 1.8 V**
D9	**VDDA1V8_0**	PWR		**Power Supply Domain 1.8 V**
R9	**VDDA1V8_1**	PWR		**Power Supply Domain 1.8 V**
F10, G10	**VDDA1V2CDB0**	PWR		**Power Supply Domain 1.2 V**
M10, N10	**VDDA1V2CDB1**	PWR		**Power Supply Domain 1.2 V**
F9	**VDDA0V8_0**	PWR		**Power Supply Domain 0.8 V**
N9	**VDDA0V8_1**	PWR		**Power Supply Domain 0.8 V**
L13	**VDDA1V8_PLL**	PWR		**Power Supply Domain 1.8 V**
J11	**VDDD0V8REF**	PWR		**Power Supply Digital Domain 0.8 V**
K11	**VDDD0V8POST**	PWR		**Power Supply Digital Domain 0.8 V**
H12	**VDDA1V8_CML**	PWR		**Power Supply Domain 1.8 V**
K12	**VDDA0V8_CML**	PWR		**Power Supply Domain 0.8 V**
K13	**VDDA1V8_PVT**	PWR		**Power Supply Domain 1.8 V**
J12	**VCC1V8_OTP**	PWR		**Power Supply Domain 1.8 V**
C15, D14	**VA0V8_0**	PWR		**0.8 V Analog Domain Supply**
D15	**VPHA1V8_0**	PWR		**1.8 V Domain Supply**
R14, T15	**VA0V8_1**	PWR		**0.8 V Analog Domain Supply**
R15	**VPHA1V8_1**	PWR		**1.8 V Domain Supply**

data sheet are Not Recommended for New Designs (NRND)
The product (or product) mentioned in this

2.2.3.8 Power Supply for TPI (AFE)

Table 11 Power Supply Pins for TPI (AFE)

Ball No.	Name	Pin Type	Buffer Type	Function
A1, A16, C4, C5, C7, C9, C11, C13, C14, D2, D6, D7, D10, D12, D13, F6, F8, F11, F13	**TPVSSA_0**	GND		**Analog Ground**
N6, N8, N11, N13, R2, R6, R7, R10, R12, R13, T4, T5, T7, T9, T11, T13, T14, V1, V16	**TPVSSA_1**	GND		**Analog Ground**

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

2.2.3.9 Ground

Table 12 Ground Pins

Ball No.	Name	Pin Type	Buffer Type	Function
D3, D4, E15, F4, G7, H7, G9, H9, G11, H15, H16, J4, J6, K6, J8, K8, J10, K10, K1, K3, K15, L7, M7, L9, M9, M11, L12, N4, N16, R4, R5	**VSSD**	GND		**Digital Ground**
A18, B18, C16, D18, R18, T16, U18, V18	**UVSS**	GND		**Ground**
D16, D17, F16, H13	**VSS_XO**	GND		**XO Device Ground** XO ground

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

2.2.3.10 Not Connected Signals

Table 13 Not Connected Signals

Ball No.	Name	Pin Type	Buffer Type	Function
A17, B16, B17, C17, C18, T17, T18, U16, U17, V17, U4, V4, U5, V5, U6, V6, U7, V7, U8, V8, U9, V9, U10, V10, U11, V11, U12, V12, U13, V13, U14, V14, U15, V15	**NC**	-	-	**No Connect** These pins must not be connected.

Data sheet
The product (or products) mentioned in this
are Not Recommended for New Designs (NRND)

3 Functional Description

3.1 Power Supply, Clock, and Reset

This section provides the information required to power up the MxL86250C.

3.1.1 Power Supply

These four power supply rails are required: 3.3 V, 0.8 V, 1.8 V, and 1.2 V. **Section 7.7.1** contains the power-up sequence.

3.1.2 Clock

An internal PLL circuit generates the required internal clocks, based on an external reference clock.

The available options are:

- An external 25 MHz crystal connected to the MxL86250C. **Section 7.7.8** documents the required crystal specification.
- 25 MHz direct from an external oscillator
- An external CML/LVPECL reference clock operating at 50 MHz

The MxL86250C provides two pairs of CML differential clock output to drive other chips. The available clock frequencies are:

- Input reference clock frequency
- 50 MHz

3.1.3 Reset Generation

The external hardware reset input (HRSTN pin) resets all the hardware modules including the pin strapping information during boot:

- Driving the HRSTN pin low causes an asynchronous reset of the MxL86250C system.
- Releasing the HRSTN pin high triggers the power-on sequence.

The HRSTN pin is internally connected to a weak internal pull-up resistor.

3.1.4 Power-On Sequence

The MxL86250C powers on when the power is applied and the HRSTN pin is high. See **Figure 25**.

The steps executed at power on are:

1. Lock the internal PLL.
2. Read the pin strap information, see **Section 3.1.5** for more information.
3. Boot the microprocessor from the internal ROM.
4. Authenticate the firmware image in the flash memory device.
5. Auto-negotiate the link speeds for the Ethernet TPI interfaces.
6. Train and link up each interface in accordance with the IEEE 802.3 **[2]** standards.

datasheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

3.1.5 Configuration by Pin Strapping

The MxL86250C is configurable by means of pin strapping on a number of the GPIO pins. The pin strapping configurations are captured during the chip power-on sequence until the reset initialization is complete.

The pin strap values are set to logical high or low by connecting the corresponding pin via an external 1 kΩ resistor to either ground or the pin supply voltage.

Table 14 and Table 15 describe the pin strap mapping.

Table 14 Pin Names Used for Pin Strapping

Ball Name	Ball Number	Configuration Item Description
GPC1	J18	PS_PHY_MADDR(4)
GPC2	J16	PS_PHY_MADDR(3)
GPC3	H17	PS_CLK_SEL
GPIO1	D5	PS_CLK_SEL1
GPIO2	P4	PS_RJ45_TAB
MDINT	G16	PS_MDINT_POLARITY
GPIO3	K4	PS_MDIO_VOLTAGE
GPC0	J17	PS_SUPER_ISOLATE

Table 15 Pin Strapping Configuration Description

Pin Strapping Signals	Description
PS_PHY_MADDR(4:3)	**MDIO Address** Specifies the most significant two bits of the MDIO address. The lowest three bits of the switch MDIO address are hard-coded to 0.
PS_MDINT_POLARITY	**MDIO Interrupt Polarity** Specifies the polarity of the MDIO interrupt. 0_B **HIGH** MDIO interrupt is active high. 1_B **LOW** MDIO interrupt is active low.
PS_RJ45_TAB	**RJ45 Tab Configuration** Specifies the tab-up or tab-down configuration of the RJ45. Each BASE-T port has the same configuration. 1_B **DOWN** Tab-down 0_B **UP** Tab-up
PS_MDIO_VOLTAGE	**MDIO Voltage** Specifies whether the maximum voltage level used by the MDIO signals is 3.3 V or 1.8 V. 0_H **LOW** MDIO_S, MDC_S, MDINT, GPIO7, GPIO8, and GPIO0 signal pins are supplied with 1.8 V. In this configuration, V_{DDP} must be supplied with 1.8 V. 1_H **NORMAL** MDIO_S, MDC_S, MDINT, GPIO7, GPIO8, and GPIO0 signal pins are supplied with 3.3 V. In this configuration, V_{DDP} must be supplied with 3.3 V.

data sheet are not recommended for New Designs (NRND)
The product(or products) mentioned in this

Table 15 Pin Strapping Configuration Description (cont'd)

Pin Strapping Signals	Description
PS_CLK_SEL PS_CLK_SEL1	**Input Clock Selection** Specifies the input clock frequency used. MSB is PS_CLK_SEL1. LSB is PS_CLK_SEL. 11_B **25** 25 MHz 10_B **50** 50 MHz 01_B **RES** Reserved 00_B **RES** Reserved
PS_SUPER_ISOLATE	**Super Isolate** Specifies whether the PHY is immediately active after a reset or is halted until it is manually activated. 0_H **HALT** The PHYs are inactive after reset. 1_H **NORMAL** The PHYs are active after reset.

Alternative ways to configure the MxL86250C after the boot process are to use the MDIO interface [1] and write into various control registers, as detailed in Section 3.3, or to use the FCA [1].

Data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

3.2 MDIO Slave Interface

The SMDIO module and the MDIO Device 30 module are directly attached to the MDIO slave interface as shown in the **Figure 4**. The MDIO Device 30 is the vendor specific 1 device for MMD=30, which supports both IEEE 802.3 clause 22 and clause 45 protocol. It allows access to the switch and the PHY configurations using the correct MDIO PHY address. The MDIO address used for this access is configurable through pin-strapping, as described in **Section 3.1.5**. A switch driver executed by the micro-controller in the figure allows configuration of the MxL86250C. The switch driver is part of the host SoC API software documented in the MxL86250C API.

The SMDIO module provides access to the external flash memory device via the QSPI interface. The MxL86250C supports downloading of firmware to the flash memory device via the SMDIO module attached to the MDIO bus. The MDIO address used for this access is the same MDIO address as defined by the pin strapping. The MxL86250C user guide **[1]** describes the driver software executed on the external processor which must be followed to perform this feature. The SMDIO module supports only IEEE 802.3 clause 22 protocol.

Data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

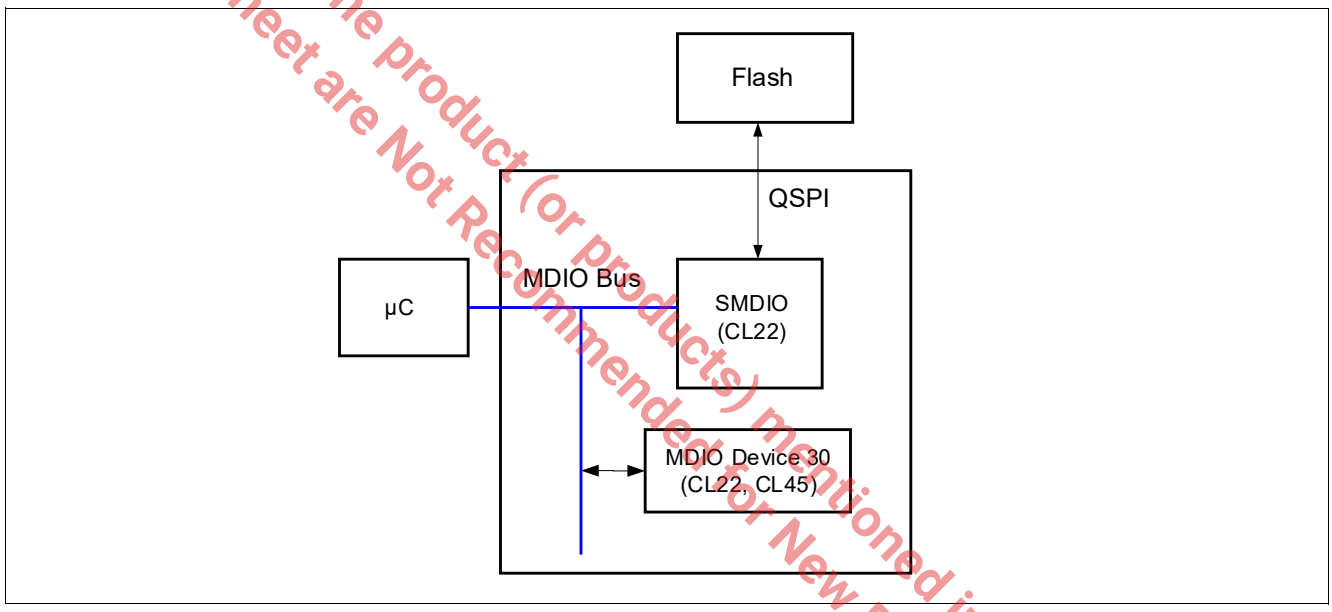


Figure 4 MDIO Slave

When other devices in the system need to be configured through MDIO, they must be connected to the MDIO slave interface and configured such that no addressing conflict arises.

The standard MDIO protocol requires a 32-bit preamble at the beginning of each read or write access. To speed up the data exchange, reduce the preamble down to 1 bit for the second and subsequent accesses.

The standard MDIO protocol uses a clock rate of 2.5 MHz on MDC. To speed up the data exchange, increase the clock applied on MDC_S to the maximum 25 MHz. **Section 7.7.4** contains more details on AC characteristics.

3.3 Configuration via MDIO Management Interface

It is possible to connect an external controller's STA to the chip's slave MDIO interface. This allows access to the MDIO and MMD registers standardized in IEEE 802.3, enabling the STA to control the chip configuration and retrieve status information. The MDIO transactions are any of the three types described in IEEE 802.3 Clause 22, Clause 22 Extended, and Clause 45 [2].

Figure 5 and **Table 16** show the minimum time required for the MDIO to be available for access.

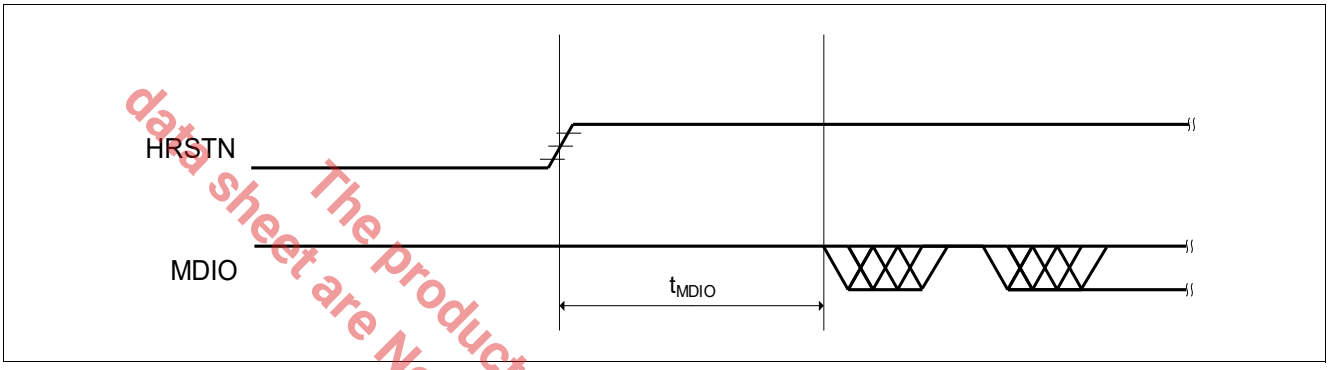


Figure 5 MDIO Access Timing

Table 16 MDIO Ready Timing

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
MDIO Ready Time	T_{MDIO}	750	–		ms	

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

3.4 Quad Serial Peripheral Interface

A Quad Serial Peripheral Interface (QSPI) is equipped to provide access to external Quad-SPI flash memory devices. The MxL86250C requires an external Quad-SPI flash memory to operate.

The QSPI supports:

- Up to 101.5625 MHz for single/double data rate
- eXecution In Place (XIP), fully memory mapped access for CPU
- Addressing up to 512 MB range

3.4.1 Supported Flash Memory Devices

Table 17 lists the qualified flash memory devices. However, it is possible for the user to select a device not present in the list after consideration of command compatibility and timing compatibility as listed in Table 18. The flash memory device must support 101.5625 MHz single data rate.

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

Table 17 Supported Flash Memory Devices

Vendor	Model
Macronix	MX25L6433F
Winbond	W25Q64JV-DTR

Table 18 Flash Command and Timing

Instruction	Abbreviation	Command	Command Cycles	Address Cycles	Dummy Cycles	Data Cycles
Write Enable	WREN	06_H	8	0	0	0
Write Disable	WRDI	04_H	8	0	0	0
Read ID	RDID	$9F_H$	8	0	0	24
Read Status Register	RDSR	05_H	8	0	0	8
Write Status Register	WRSR	01_H	8	0	0	8
Read Configuration Register	RDCR	15_H	8	0	0	8
Read Data Bytes	READ	03_H	8	24	0	8
Fast Read	FREAD	$0B_H$	8	24	8	8
Quad Read	4READ	EB_H	8	6	10	2
XIP	XIP	EB_H	8	6	10	2 x n[1)]
Chip Erase	CE	$C7_H$	8	0	0	0
Block Erase	BE	$D8_H$	8	24	0	0
Sector Erase	SE	20_H	8	24	0	0
Page Program	PP	02_H	8	24	0	8 x n[1)]
Reset Enable	RSTEN	66_H	8	0	0	0
Reset	RST	99_H	8	0	0	0

1) n is the number of bytes

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

3.5 GPIO Mapping

Other than the GPIO functionality, the GPIO pins are also shared with other alternative functions. The GPIO pins are configurable to alternative functions, which are based on the pinmux settings as shown in Table 19.

Table 19 GPIO Mapping

Pinmux Mode 0 (Default)	Pinmux Mode 1	Pinmux Mode 2	Pinmux Mode 3
GPIO0	GPIO0	EXTINT0	—
GPIO1	GPIO1	EXTINT1	WSP_URXD
GPIO2	GPIO2	—	—
GPIO3	GPIO3	—	—
MDINT	GPIO4	—	—
MDC_S	GPIO5	—	—
MDIO_S	GPIO6	—	—
—	GPIO7	—	—
—	GPIO8	—	—
QSPI_D0	GPIO9	—	—
QSPI_D1	GPIO10	—	—
QSPI_D2	GPIO11	—	—
QSPI_D3	GPIO12	—	—
QSPI_CLK	GPIO13	—	—
QSPI_CS	GPIO14	—	—
QSPI_RST	GPIO15	—	—
—	GPIO16	—	—
—	GPIO17	—	—
—	GPIO18	—	—
—	GPIO19	—	—
PHYLED1_0	GPIO20	—	FW_UTXD
PHYLED2_0	GPIO21	—	FW_URXD
PHYLED3_0	GPIO22	—	—
PHYLED1_1	GPIO23	—	—
PHYLED2_1	GPIO24	—	—
PHYLED3_1	GPIO25	—	—
PHYLED1_2	GPIO26	—	TDI
PHYLED2_2	GPIO27	—	TMS
PHYLED3_2	GPIO28	—	—
PHYLED1_3	GPIO29	—	TCK
PHYLED2_3	GPIO30	—	TDO
PHYLED3_3	GPIO31	—	—
PHYLED1_4	GPIO32	—	—
PHYLED2_4	GPIO33	—	—
PHYLED3_4	GPIO34	—	—

data sheet are Not Recommended for New Designs (NRND)
The Product (or products) mentioned in this

Table 19 GPIO Mapping (cont'd)

Pinmux Mode 0 (Default)	Pinmux Mode 1	Pinmux Mode 2	Pinmux Mode 3
—	GPIO35	—	—
—	GPIO36	—	—
—	GPIO37	—	—
—	GPIO38	—	—
—	GPIO39	—	—
—	GPIO40	—	—
—	GPIO41	—	—
—	GPIO42	—	—
—	GPIO43	—	—
GPC0	GPIO44	WSP_UTXD	—
GPC1	GPIO45	—	WSP_UTXD
GPC2	GPIO46	—	WSP_URXD
GPC3	GPIO47	—	—

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

3.6 Ethernet PHY Interface

The Ethernet PHY implements the physical layer of the Ethernet standard. It supports Digital Signal Processing (DSP) and Analog Signal Processing (ASP) functions in transmitting data over the twisted pair cable.

3.6.1 Twisted Pair Interface

The Twisted Pair Interface (TPI) of the MxL86250C is fully compliant with IEEE 802.3. The MxL86250C integrates series resistors required to terminate the TPI links with a 100 Ω nominal impedance to facilitate a low-power implementation and reduce PCB costs. As a consequence, it is possible to connect the TPI pins directly via a transformer to the RJ45 connector. Additional external circuitry is required for common-mode termination and rejection as described in **Section 7.8.1**.

Figure 6 shows a schematic of the TPI circuitry taking these components into account.

data sheet are Not Recommended for New Designs (NPND)
The product(s) mentioned in this

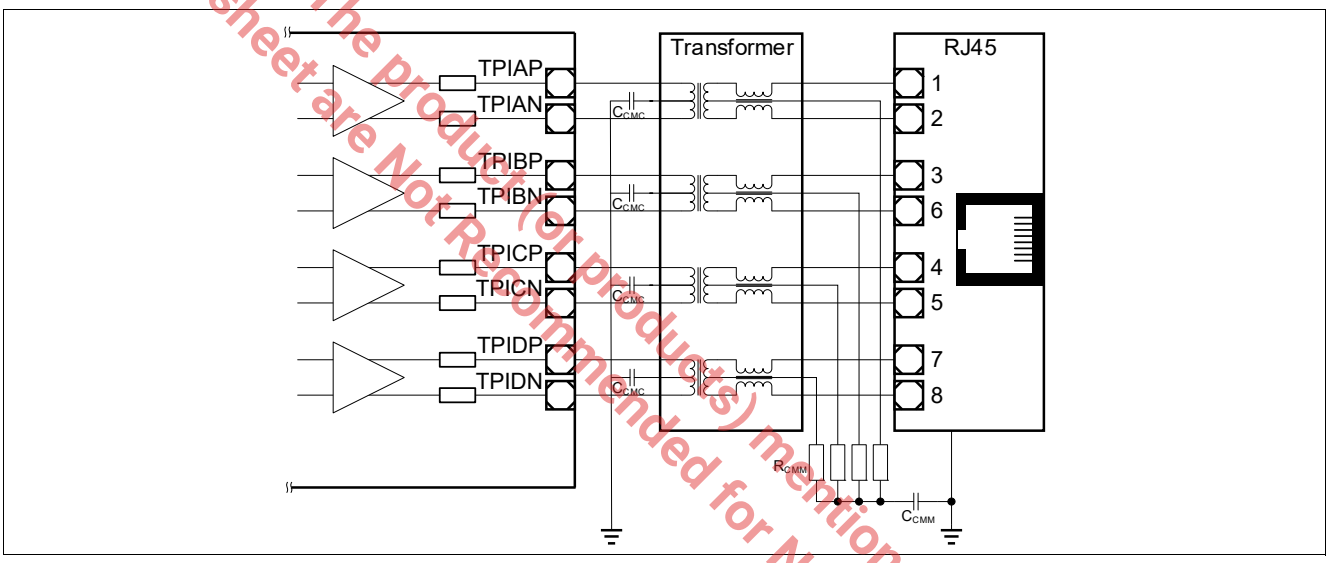


Figure 6 Twisted-Pair Interface of MxL86250C Including Transformer and RJ45 Plug

3.6.2 Transformerless Ethernet

Transformerless Ethernet (TLE) is required for backplane applications where the use of a transformer is not always required to fulfill the galvanic decoupling requirements of the isolation specifications. In such applications, removing the transformer reduces both the external bill of material and the space requirements on the PCB.
As the MxL86250C incorporates a voltage-mode line driver, the only stringent requirement is to use AC coupling, which is achievable using simple SMD type series capacitors. The value of the capacitors is selected such that the high-pass characteristics correspond to an equivalent standard transformer based application. The recommended value is $C_{coupling}$ = 100 nF. **Figure 7** shows the external circuitry for TLE.

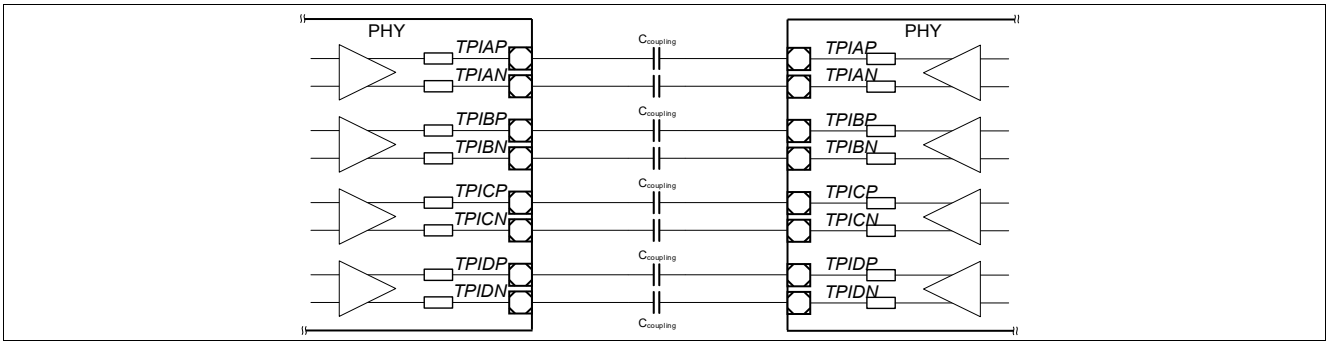


Figure 7 External Circuitry for the Transformerless Ethernet Application

3.6.3 Auto-Negotiation

The MxL86250C supports auto-negotiation (ANEG) as part of the startup procedure to exchange capability information with the link partner. ANEG is enabled at the MxL86250C initialization and its 2.5 Gbps speed capability is advertised. The ANEG procedure is executed according to IEEE 802.3 Clause 28, Clause 40, and IEEE 802.3 Clause 126 [2]. When the link partner does not support ANEG, the MxL86250C determines the link speed configuration using parallel detection as described in Clause 28.

With MDIO commands, it is possible to disable ANEG and change the advertised link rates. The STA is also able to disable ANEG. In this situation, the system configuration must ensure compatibility between link partners to allow link up in a compatible mode.

Attention: STD_CTRL.DPLX only takes effect when the ANEG process is disabled and the GPHY TPI is not operating in loopback mode, that is, bits STD_CTRL.ANEN and STD_CTRL.LB are set to zero. Forced half-duplex mode (STD_CTRL.DPLX = 0b0) is only supported in 10BASE-T and 100BASE-TX speed modes. This field is ignored for higher speeds.

3.6.4 Auto-Downspeed

The auto-downspeed (ADS) feature implements a process to renegotiate the link with a lower speed when the link quality is insufficient. The feature ensures maximum interoperability even in harsh, or inadequate, cable infrastructure environments. In particular, ADS is applied during the 2.5GBASE-T/1000BASE-T training phase. ADS is also required when the quality or characteristics of the cable in use cannot support the advertised speed.

For example, it is possible to advertise 2.5GBASE-T/1000BASE-T during ANEG when both link partners are connected via a cable that does not support the 4-pair Gigabit Ethernet mode. The MxL86250C detects such a configuration to avoid repeating link up failures and clears the 2.5GBASE-T/1000BASE-T capability in the ANEG advertisement registers. After the resulting link down, the next ANEG procedure no longer advertises 1000BASE-T/2.5GBASE-T. The next link up is done at the next advertised speed below 1000 Mbps.

The MxL86250C also executes an ADS procedure when the signal quality is not suited to a 1000BASE-T/2.5GBASE-T link up due to increased alien noise or a loop length that significantly exceeds the standard specification.

When the MxL86250C is configured not to advertise a speed capability below 1000 Mbps, the ADS feature is automatically disabled.

3.6.5 Polarity Reversal Correction

For each of the 4 pairs, the MxL86250C automatically detects and corrects any inversion of the signal polarity on the P and N signals. The detection is done during the auto-negotiation phase. The detected polarity is frozen when the link is established, and remains unchanged until the link is dropped.

The polarity corrections applied are indicated in the register: `PMA_MGBT_POLARITY` (register 1.130); and are valid after auto-negotiation is complete.

3.6.6 Auto-Crossover Correction

To maximize interoperability, even in inadequate wiring environments, the MxL86250C automatically performs cable crossover (MDI-X) correction. **Table 20** lists the supported pair-mappings detectable and correctable by the device.

The MxL86250C automatically detects and corrects crossed cable configuration, where the transmit-receive pairing between partners does not match. The auto-crossover function is fully compliant with IEEE 802.3, Clause 40.4.4 [2], in 1000BASE-T and 2.5GBASE-T mode.

The corrections applied are indicated in the register: `PMA_MGBT_POLARITY` (register 1.130) and are valid when auto-negotiation is complete.

Data Sheet are Not Recommended for New Designs (NRND)

Table 20 Supported Twisted Pair Mappings on a Cat 5 or Better Cable

Crossover Modes on RJ45[1)]		RJ45 Pinning							
Mode	**Description**	**1**	**2**	**3**	**4**	**5**	**6**	**7**	**8**
11	Straight cable, standard compliant	TPIAP **(A+)**	TPIAN **(A-)**	TPIBP **(B+)**	TPICP **(C+)**	TPICN **(C-)**	TPIBN **(B-)**	TPIDP **(D+)**	TPIDN **(D-)**
00	Full Gigabit Ethernet MDI-X This is standard-compliant MDI-X with pair A/B swapped and pair C/D swapped.	TPIBP **(B+)**	TPIBN **(B-)**	TPIAP **(A+)**	TPIDP **(D+)**	TPIDN **(D-)**	TPIAN **(A-)**	TPICP **(C+)**	TPICN **(C-)**

1) This pin assignment is according to TIA/EIA-568-A/B.

Data sheet are Not Recommended for New Designs (NRND)
The product(s) mentioned in this

3.6.7 RJ45 Tab Up or Tab Down Configuration

Figure 8 shows that the RJ45 plug on the system PCB is solderable with the tab either up or down.

The difference between tab up and tab down is a swap in position between A and D, and a swap in position between B and C. The pin strap `PS_RJ45_TAB` allows the system designer to perform this configuration. As a result, a PCB layout does not need to be modified when a RJ45 tab up or down socket needs to be mounted. The single pin strap is applicable to all ports, which are either all tab down or all tab up.

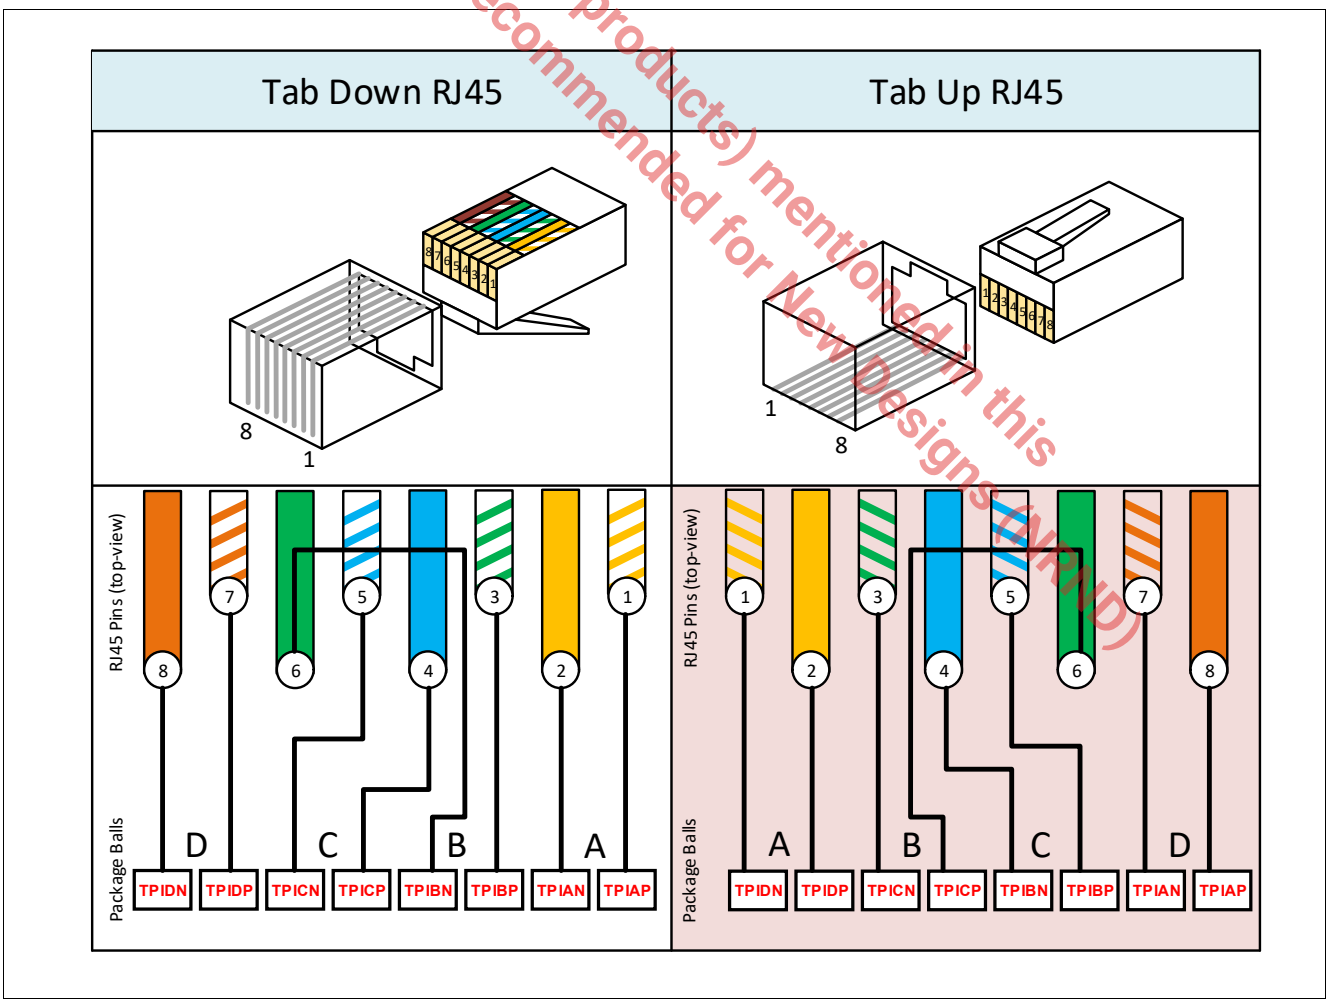


Figure 8 RJ45 Tab Up or Tab Down Configuration

3.6.8 Wake-on-LAN

The MxL86250C supports WoL. The MxL86250C generates an interrupt to an external controller or to an internal controller when it detects special WoL Ethernet packets. This allows the controller to enter sleep mode when there is no Ethernet traffic to process, and be woken up when traffic starts. WoL packets are detected at all link speeds. **Figure 9** shows the scenario when connected to an external device.

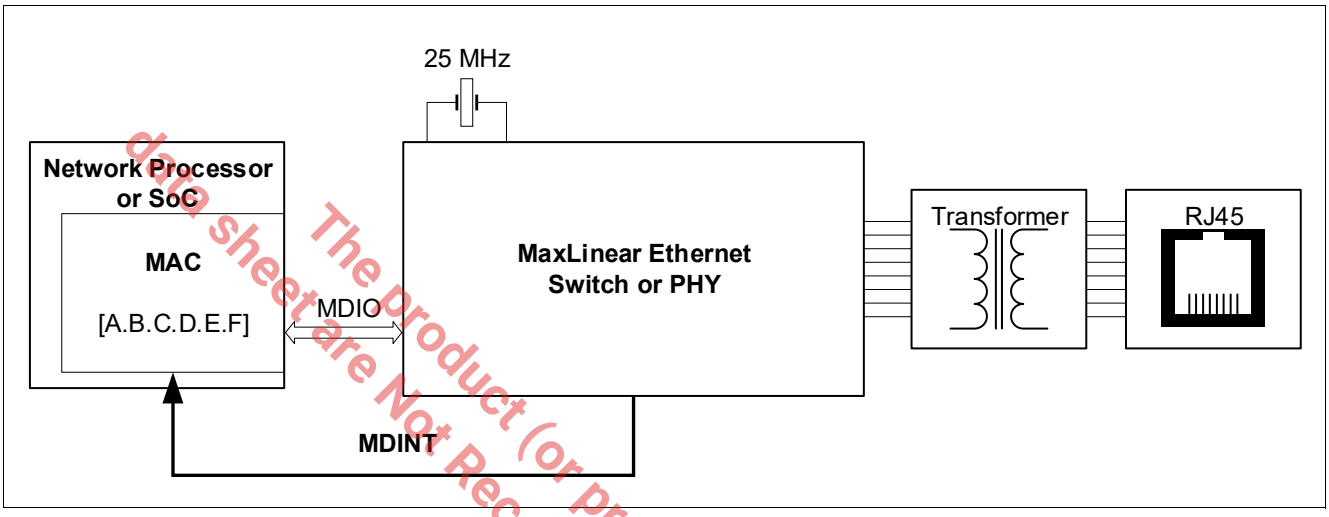


Figure 9 WoL Application Block Diagram

The most commonly used WoL packet is called a magic packet, which contains the MAC address of the device to be woken up, and an optional password called SecureON. The MAC address and the optional SecureON password relevant for the WoL logic inside the MxL86250C are configurable in the WoL MDIO registers in the Vendor Specific 2, VSPEC2 MMD, device described in **Chapter 4**. When such a configured magic packet is received, an interrupt is issued.

Table 21 gives an example programming sequence for these configuration registers.

Table 21 Programming Sequence for the Wake-on-LAN Functionality

Step	Register Access	Remark
1	`MDIO.MMD.WOLAD01` = $EEFF_H$	Programs the fifth and sixth MAC address bytes.
2	`MDIO.MMD.WOLAD23` = $CCDD_H$	Programs the third and fourth MAC address bytes.
3	`MDIO.MMD.WOLAD45` = $AABB_H$	Programs the first and second MAC address bytes.
4	`MDIO.MMD.WOLPW01` = 4455_H	Programs the fifth and sixth SecureON password bytes.
5	`MDIO.MMD.WOLPW23` = 2233_H	Programs the third and fourth SecureON password bytes.
6	`MDIO.MMD.WOLPW45` = 0011_H	Programs the first and second SecureON password bytes.
7	`MDIO.PHY.IMASK.WOL` = 1_B	Enables the wake-on-LAN interrupt mask.
8	`MDIO.MMD.WOLCTRL.WOL.EN` = 1_B	Enables wake-on-LAN functionality.

data sheet are Not Recommended for New Designs (NRND)
The Product (or products) mentioned in this

3.7 LED Interface

This section describes the LED interface.

3.7.1 LED

The MxL86250C allows 15 synchronized LEDs to be used for visual status indication. Each LED pin drives either a single color LED or dual color LED.

3.7.2 LED Configuration

The MxL86250C API describing the driver software executed on the Host SoC must be followed to configure this interface. When there is no Host SoC attached, it is possible for the configurations to be done in the FCA [1].

Figure 10 shows the external LED connected to either ground or the power rail in single color mode.

Figure 11 and **Figure 12** show the connection of single and dual color LEDs when the pin is also used for pin strapping.

Note: These figures do not show the full recommended circuits with all the necessary components. Refer to the relevant HDK/EVK PCB design documentation for more details.

data sheet are Not Recommended for New Designs (NRND)
file product (or products) mentioned in this

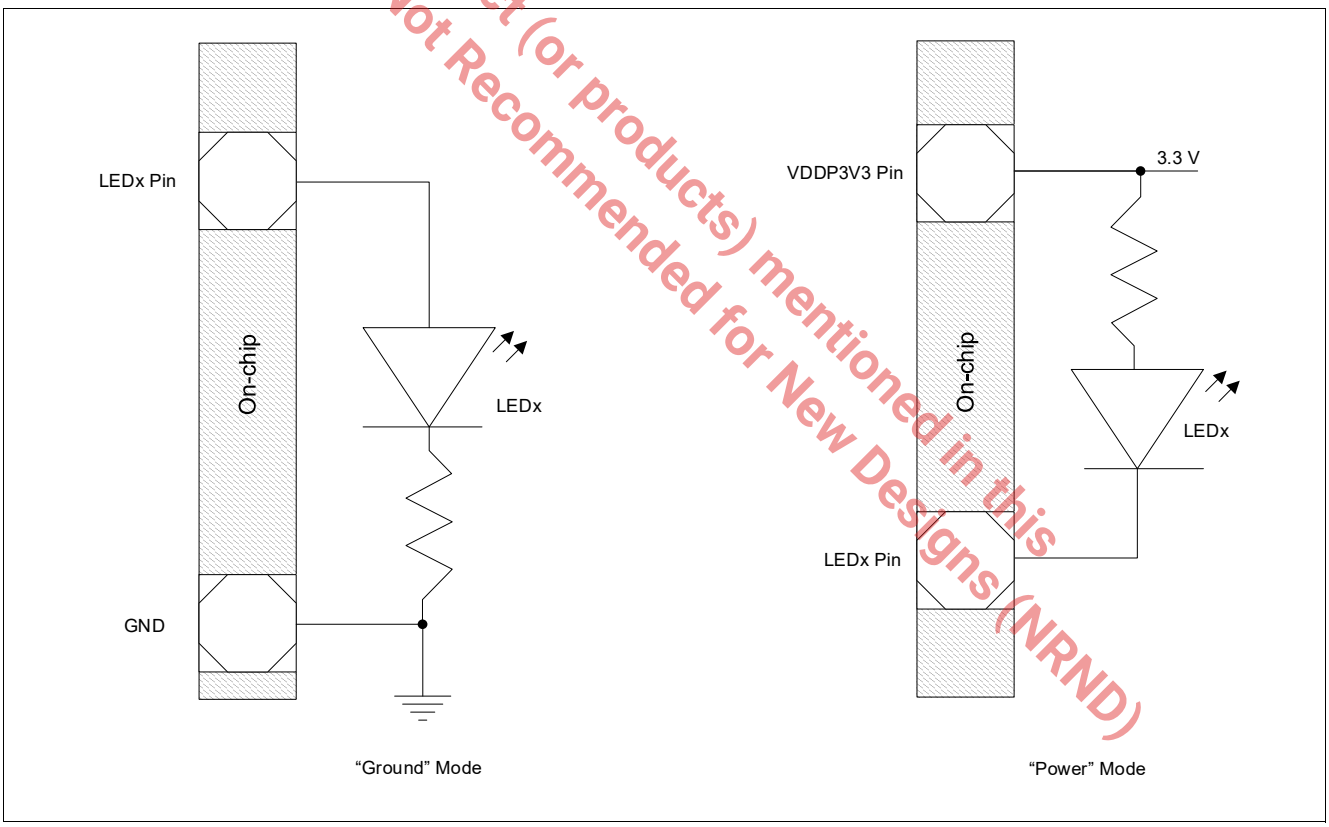


Figure 10 LED Connection Options to Ground or Power Supply

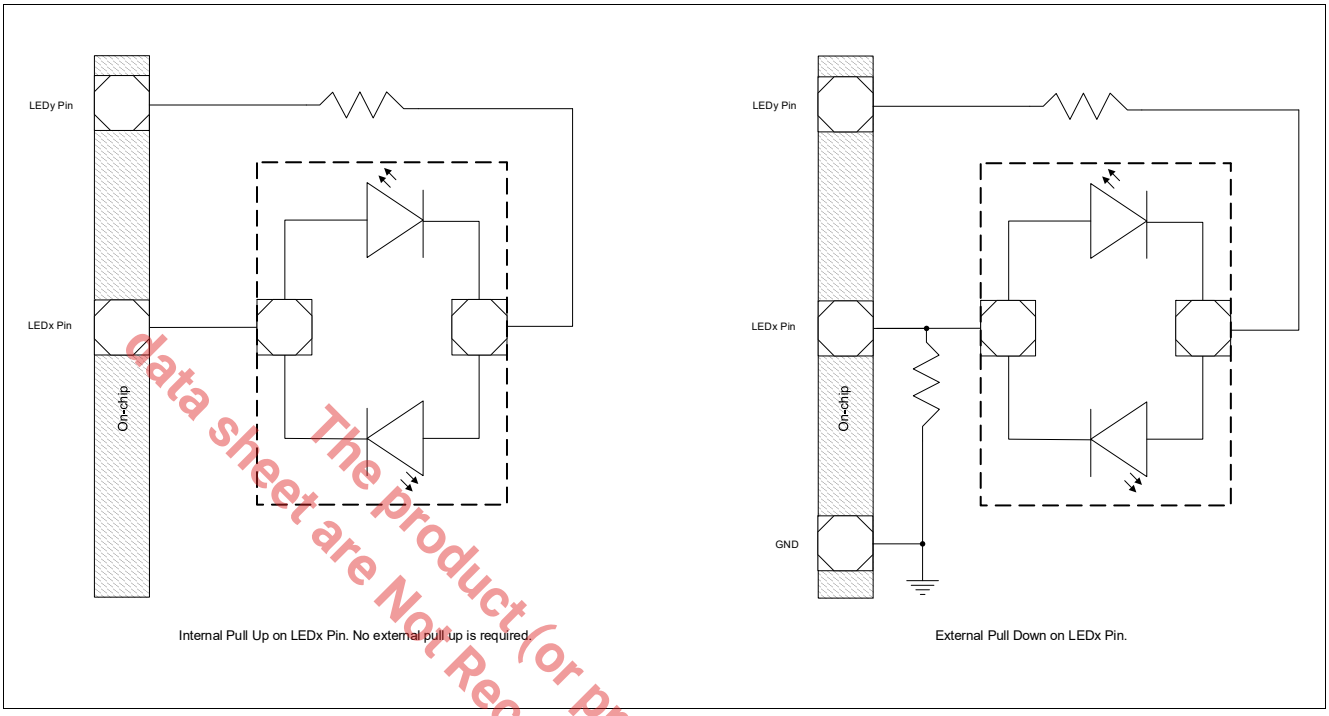


Figure 11 Connection of a Dual Color LED and Configuring Pin Strap Value

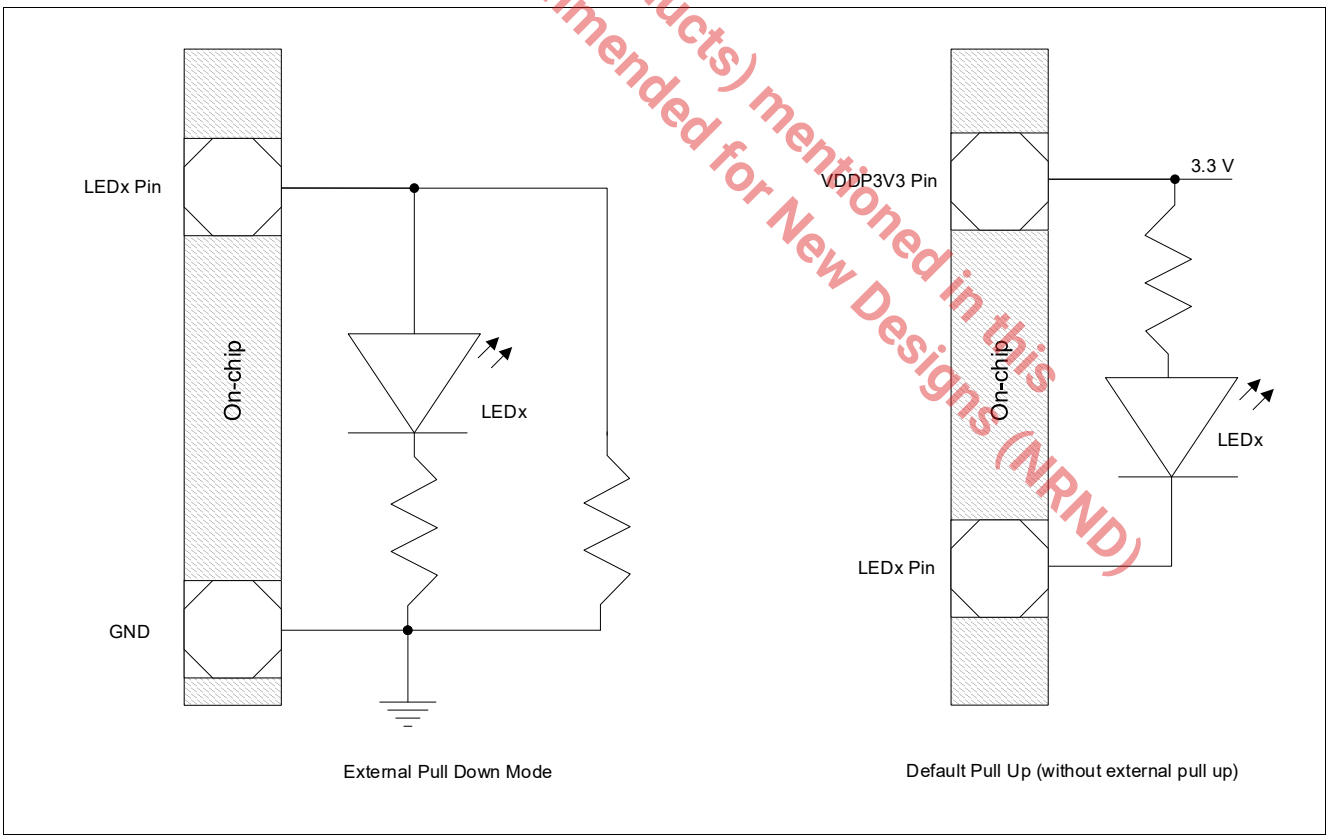


Figure 12 Connection of a Single Color LED and Configuring Pin Strap Value

data sheet are Not Recommended for New Designs (NRND)
The Product (or products) mentioned in this

3.7.3 LED Brightness Control

There are two LED brightness modes configurable by the API for the MDIO-managed mode, or FCA [1] for the unmanaged mode, based on the system requirement.

- LED Brightness Level Maximum Mode
  Fixed level signal (no pulses) for maximum brightness, also available as a control signal for other purposes.
- LED Brightness Level Control Mode (Constant Mode)
  Allows the configuration of 16 levels of LED brightness. See **Brightness Control**.

Brightness Control

This block controls the brightness of the LED by controlling the time duration for which the LED is on/off. The persistence characteristic of the eye causes it to perceive this as LED brightness. When LED is off, the output is disabled. When the LED is on, the output is enabled. The brightness control affects the LED output enable directly.

Figure 13 shows the brightness control frequency is 81.25 Hz, where each period is divided into 64 slots.

In the LED brightness level maximum mode, the LED is enabled in all 64 slots, as shown in brightness level 0 which is the maximum brightness.

In the LED brightness level control mode, the LED is enabled for n consecutive slots, where n is determined by the configured brightness level. Figure 13 shows the brightness level in active low mode, whereby brightness level 15 is the minimum brightness.

data sheet are NOT Recommended for New Designs (NRND)
The product (or products) mentioned in this



Figure 13 LED Brightness Control by Controlling LED Output Enable/Disable

3.8 Power Management

This section describes the power management functions of the MxL86250C integrated Ethernet PHY.

3.8.1 Power States

Figure 14 illustrates the power states and transitions of each integrated Ethernet PHY.

In this state diagram, the (0.11) syntax corresponds to the value of bit 11 from register 0 in device 0, which is `STD_CTRL.PD`. This is the Power Down (PD) bit in `MDIO STD_CTRL`, described in **Chapter 4**. The STA is able to use this `STD_CTRL.PD` field to bring the physical interface into the **POWER DOWN State**.

The other states are automatically entered by the MxL86250C depending on the context, and following the EEE protocol. This is done without any intervention from the STA.

The Normal Link Pulse (NLP) and Fast Link Pulse (FLP) are received on the TPI from a link partner and used to wake up the MxL86250C and enter auto-negotiation.

The product (or product(s) mentioned in this datasheet are Not Recommended for New Designs (NRND)

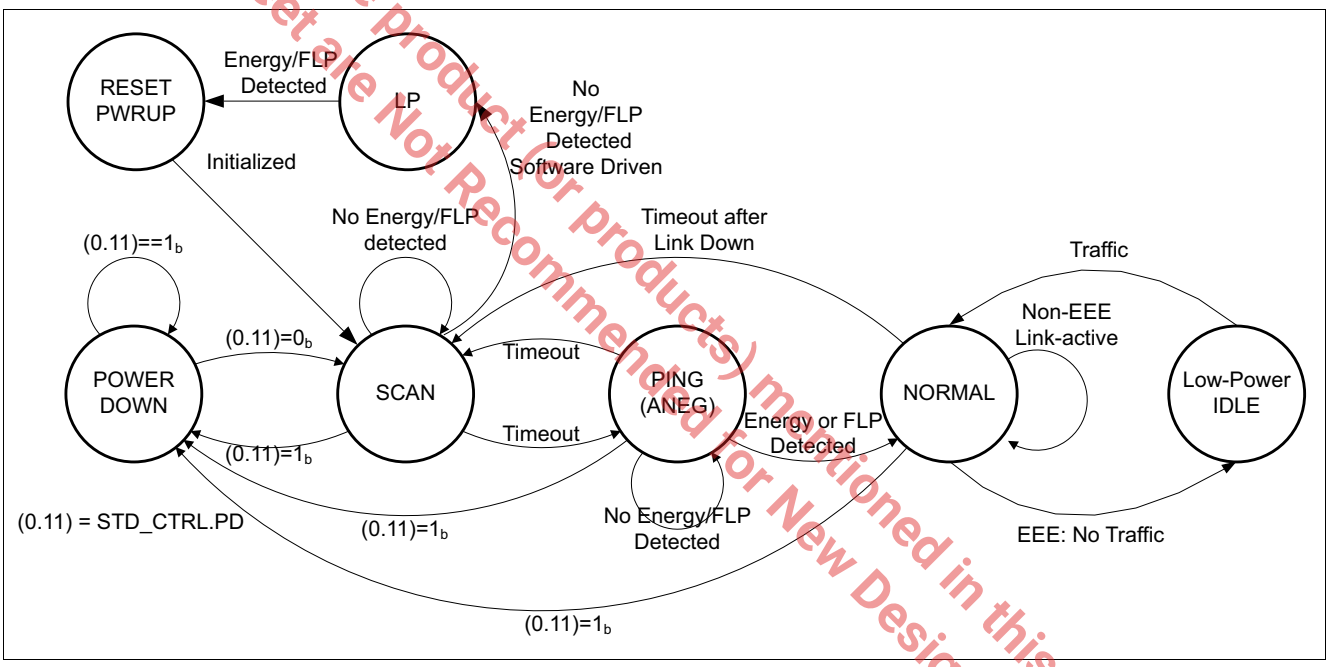


Figure 14 State Diagram for Power Down State Management

3.8.2 RESET PWRUP

The MxL86250C starts up in the RESET Power Up (PWRUP) state after either a hardware reset or power up.

After initialization, the PHYs always transition to the **SCAN (ANEG) State**.

3.8.3 POWER DOWN State

The **POWER DOWN State** is entered by setting the PD bit (0.11) of the MDIO standard register `STD_CTRL` to 1, regardless of the current state of the device. The **POWER DOWN State** corresponds to power down as specified in IEEE 802.3, Clause 22.2.4.1.5. Some signal processing blocks are stopped to save energy, but the MxL86250C still responds to MDIO messages.

Exiting the **POWER DOWN State** is triggered by setting the PD bit (0.11) of `STD_CTRL` to 0, which initiates a transition to the **SCAN (ANEG) State**.

3.8.4 SCAN (ANEG) State

The SCAN state differs from the **POWER DOWN State** in that the receiver periodically scans for signal energy or FLP bursts on the TPI. There is no transmission in this state. When an FLP burst is received, the MxL86250C enters the auto-negotiation protocol to exchange capabilities with the link partner and establish a data link in the **NORMAL State**.

3.8.5 PING (ANEG) State

The PING state is similar to the **SCAN (ANEG) State** except that the transceiver transmits an FLP burst onto the TPI for a programmable amount of time. This is used to wake potential link partners from the **POWER DOWN State**. This state corresponds to the state of ANEG described in Clause 28 of the IEEE standard **[2]**.

3.8.6 Low-Power State

The MxL86250C's Low-Power (LP) state is enabled by configuring the MDIO register `PHY_CTL2.LP`. The LP state is entered automatically when there is no Ethernet cable connected to the MxL86250C. The MxL86250C firmware detects this condition when no energy or Link Pulse is present on the TPI and enters the LP state. It is intended to set the MxL86250C into its maximum power saving state. In this state, most digital domains are in reset. Only a minimal amount of circuitry (analog/digital) operates to detect signal energy on the receiver of a TPI and trigger a wake-up.

When the port is in the LP state, the STAs do not have access to the corresponding MDIO/MMD registers.

The LP state is exited upon detection of signal energy on the twisted pair (either NLP or FLP). The port transitions to the **RESET PWRUP** state automatically. The STA host is also able to trigger an LP state exit by applying an API to wake up the specific port that entered the LP state.

It is possible for the STA host to be informed of the LP entry condition. By setting the `PHY_IMASK.LP` bit to ACTIVE, the STA requests the MDINT interrupt from the port when the entry conditions are met. **Figure 15** shows all the LP related control bits and communication mechanism between the STA and the MxL86250C.

It is possible for the STA host to be informed of the LP exit condition. By setting the `VSPEC1_IMASK.CDET` bit to ACTIVE, the STA requests the MDINT interrupt from the port when energy on the link is detected during auto-negotiation. Even when none of the ports are in the LP state, this interrupt is triggered whenever energy is first detected on the link. When the STA triggers the LP state exit via a wake-up request, and there is no energy on the link after the LP state exit, no interrupt is asserted.

Attention: An active-high MDINT in push-pull mode (default is tristate mode) is not supported in the LP mode.

Attention: VSPEC1_IMASK.CDET is not supported in forced speed 10BASE-T/100BASE-TX mode. Auto-negotiation is required to support this feature.

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

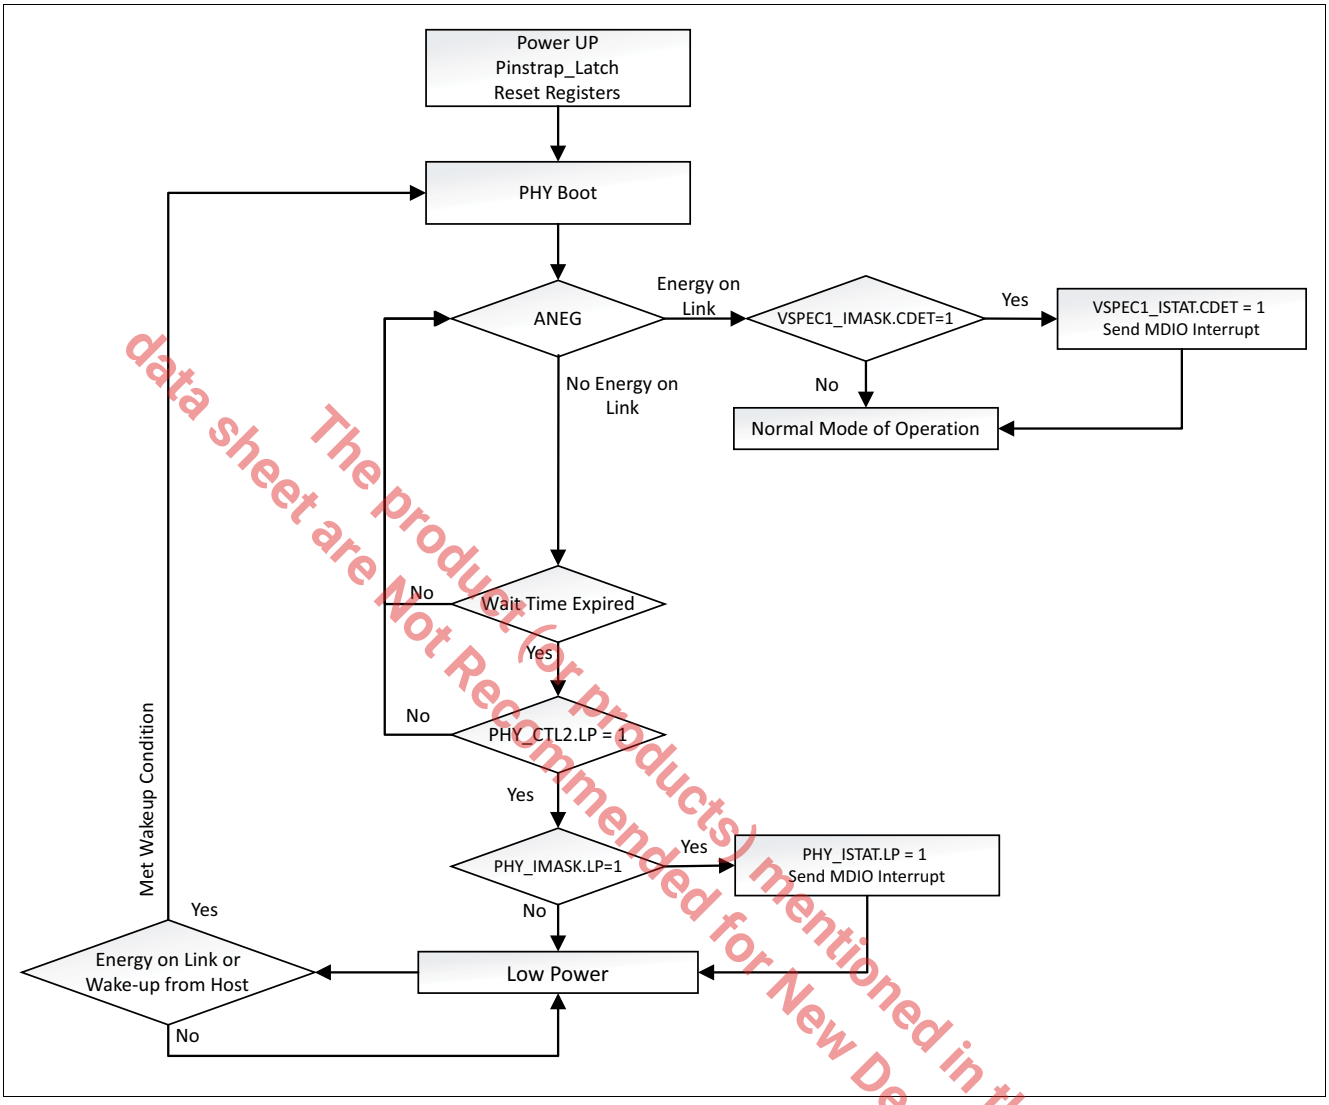


Figure 15 Low Power Sequence

The product (or products) mentioned in this data sheet are Not Recommended for New Designs (NRND)

Table 22 Low Power State Entry and Exit Sequence

Step	State	Remark
1	ACTIVE The LP feature is enabled by setting `PHY_CTL2.LP` = 1	Use the MDIO register PHY_CTL2.LP to enable or disable the LP feature.
2	ANEG, Ability Detect	The firmware detects no energy on the cable when no FLP is received for a long period of time. When the LP feature is not enabled, this time is fixed to between 6.4 and 9.6 seconds. When the LP feature is enabled, this time is configured using the `VSPEC1_LOW_POWER_ENTRY_TIME.LPE_TIM` register. Time in seconds = 4 x value programmed. Default time is 4 seconds. (`VSPEC1_LOW_POWER_ENTRY_TIME.LPE_TIM` = 1). There is an initial time of between 2.4 and 5.6 seconds, which adds on to the programmed time.
3	LP Entry Timer	This time is configured with the `VSPEC1_LOW_POWER_ENTRY_TIME.LPE_TIM` register. The value is set in steps of 4 seconds. The default time is 4 seconds.
4	LP Entry	The MxL86250C saves MDIO LP persistent registers. An interrupt is sent to indicate entry into the LP state.
5	LP State	Power consumption is saved in this state. The MxL86250C listens to energy pulses from the link partner ANEG as a condition to trigger an exit from the LP state. Only a minimal amount of circuitry operates to detect signal energy on TPI and trigger a wake-up. The port LEDs and MDIO interface are disabled.
6	LP Exit (Option 1) Based on energy detected on the cable	The MxL86250C restores the configurations in the MDIO registers. An interrupt is sent to indicate an exit from the LP state.
7	LP Exit (Option 2) Based on a wake-up request from the STA	The STA is able to request an LP exit by using a provided API. The MxL86250C restores the configurations in the MDIO registers. No interrupt is sent to notify LP exit. Not applicable if MxL86250C is not managed via MDIO.
8	ANEG, LINK-UP, and ACTIVE	The MxL86250C operates in normal power modes.

The product (or products) mentioned in this data sheet are Not Recommended for New Designs (NRND)

These are persistent MDIO registers saved and restored during LP entry-exit.

1. STD_CTRL.SSM
2. STD_CTRL.DPLX
3. STD_CTRL.ANEN
4. STD_CTRL.SSL
5. STD_AN_ADV.TAF
6. STD_AN_ADV.XNP
7. STD_GCTRL.MBTHD
8. STD_GCTRL.MBTFD
9. STD_GCTRL.MSPT
10. STD_GCTRL.MS
11. STD_GCTRL.MSEN
12. PHY_IMASK
13. PHY_CTL1.AMDIX
14. PHY_CTL1.MDIAB
15. PHY_CTL1.MDICD
16. PHY_CTL1.POLA
17. PHY_CTL1.POLB
18. PHY_CTL1.POLC
19. PHY_CTL1.POLD
20. PHY_CTL2.LPI
21. PHY_CTL2.ANPD
22. PHY_CTL2.PSCL
23. PHY_CTL2.LP
24. PHY_CTL2.STICKY
25. PHY_CTL2.SDETP
26. PHY_LED
27. ANEG_CTRL.ANEG_ENAB
28. ANEG_MGBT_AN_CTRL.LDL
29. ANEG_MGBT_AN_CTRL.FR
30. ANEG_MGBT_AN_CTRL.FR2G5BT
31. ANEG_MGBT_AN_CTRL.AB2G5BT
32. ANEG_MGBT_AN_CTRL.PT
33. ANEG_MGBT_AN_CTRL.MS_MAN_EN
34. ANEG_MGBT_AN_CTRL.MSCV
35. ANEG_EEE_AN_ADV1.EEE_100BTX
36. ANEG_EEE_AN_ADV1.EEE_1000BT
37. ANEG_EEE_AN_ADV2.EEE2G5
38. ANEG_MGBT_AN_CTRL2.THPBYP2G5
39. VSPEC1_NBT_DS_CTRL.NO_NRG_RST
40. VSPEC1_NBT_DS_CTRL.DOWNSHIFTEN
41. VSPEC1_NBT_DS_CTRL.DOWNSHIFT_THR
42. VSPEC1_NBT_DS_CTRL.NRG_RST_CNT
43. VSPEC1_NBT_DS_CTRL.FORCE_RST
44. VSPEC1_LED0
45. VSPEC1_LED1
46. VSPEC1_LED2
47. VSPEC1_PM_CTRL
48. VSPEC1_LOW_POWER_ENTRY_TIME.LPE_TIM
49. VSPEC1_IMASK
50. VSPEC1_FRCTL.CAP_EXT

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

51. VSPEC1_FRCTL.CAP_TXDIS
52. VSPEC1_FRCTL.CAP_THPBYP
53. VSPEC1_FRCTL.CAP_CISCO
54. VSPEC1_FRCTL.CAP_IEEE
55. VSPEC1_FRCTL.MAX_FR_RETRY
56. VSPEC2_WOL_CTRL
57. VPSPEC2_WOL_AD01
58. VPSPEC2_WOL_AD23
59. VPSPEC2_WOL_AD45
60. VPSPEC2_WOL_PW01
61. VPSPEC2_WOL_PW23
62. VPSPEC2_WOL_PW45

3.8.7 NORMAL State

The NORMAL state is used to establish and maintain a link connection. When a connection is dropped, the MxL86250C moves back into the **SCAN (ANEG) State**.

The product (or products) mentioned in this data sheet are Not Recommended for New Designs (NRND)

3.8.8 Low Power IDLE State - Energy-Efficient Ethernet

The IEEE 802.3 standard [2] describes the EEE operation supported by the MxL86250C in the various speeds of 100BASE-TX, 1000BASE-T, and 2.5GBASE-T. The general idea of EEE is to save power during periods of low link utilization. Instead of sending active idle data, the transmitters are switched off for a short period of time. This is called the quiet period. The link is kept active by means of a frequent refresh cycle initiated by the PHY itself while in the low power state. This sequence is repeated until a wake request is generated by one of the link partner MACs. The MxL86250C follows the IEEE 802.3 standard regarding EEE. Figure 16 illustrates the principle. This state is entered automatically when the low power idle conditions are met.

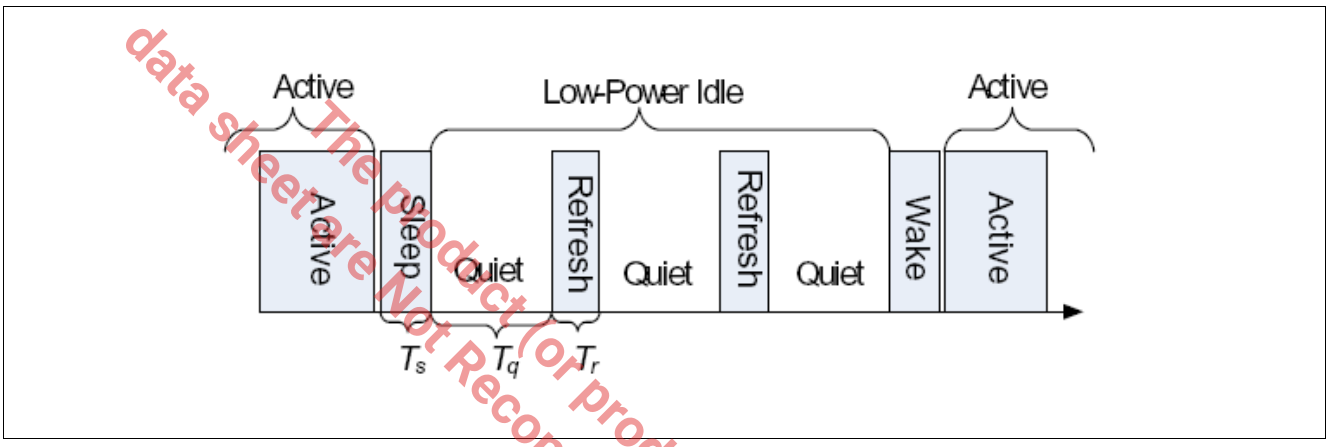


Figure 16 EEE Low Power Idle Sequence

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

3.9 Firmware Upgrade

The MxL86250C provides a Firmware Upgrade feature that allows feature and functional enhancements of the MxL86250C in the field.
It is possible to download a new firmware image via the MxL86250C's **MDIO Slave Interface** to a serial flash memory device connected to the MxL86250C's QSPI. The MxL86250C is then able to fetch the upgraded firmware from the flash memory after a reboot.

For Security Development Lifecycle (SDL) **[5]** reasons, the MxL86250C only accepts firmware images electronically signed by MaxLinear. When authentication of the flash image by the MxL86250C fails, or the download of the image is aborted or fails, the MxL86250C resets and wait for a new image to be downloaded.

The supported options for upgrading the firmware image are:

- The firmware is upgradeable over the MDIO slave interface to the flash memory device for MDIO-managed mode.
- In addition firmware download into "empty" flash is supported over MDIO slave interface.

Attention: The MDIO slave interface for firmware download or upgrade supports IEEE 802.3 Clause 22 only.

Attention: The MDIO address for firmware download or upgrade to flash is defined by the pin strapping in Table 15 with the lowest three bits equal to 0.

Attention: After the firmware upgrade to the flash memory is completed, the MxL86250C must be rebooted such that the new image is authenticated. The same requirement also applies to flash memory devices that are programmed directly by customers, which do not use the firmware upgrade procedure provided in this section.

The procedure to download firmware over the MDIO slave interface is documented in **[1]**. It provides information on the update/download process and which actions are required in the external processor application.

Security feature to prevent flash memory wear-out due to frequent updates (flash anti-wear out) is not supported within the MxL86250C. When the system to which the MxL86250C is attached mandates such features, they must be supported by the system itself. Flash memory components typically support a minimum of 100,000 erase/program cycles, so flash wear-out is unlikely. However, ensuring a minimum interval between flash updates decreases the likelihood of wear-out. An interval of one hour sets the minimum time before wear-out to longer than 11 years. The system is also expected to ensures that the firmware is only installed when a new firmware is available and does not attempt to install a new firmware after every reboot.

Security feature to prevent rollback of the image to a previous version (anti-rollback) is supported within the MxL86250C. The MxL86250C verifies that the new firmware has a higher or same security version number (SVN) than the previously installed firmware before executing it. If this step fails due to the firmware SVN being a lower version, the MxL86250C resets itself and waits for the host SoC to download a new image to the flash memory over the MDIO slave interface. If the system does not desire to have this anti-rollback feature, MaxLinear will deliver firmware images with fixed SVN, such that the security check will always pass.

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

3.10 Switch Fabric Functional Description

This section provides a detailed functional description of the Switch Fabric.

3.10.1 Overview

The Switch Fabric is responsible for classifying, storing, and forwarding multiple data packets. It consists of storage buffer, packet queuing, and packet classification units. Ingress data received on one of the interfaces is classified and placed in the appropriate QoS queue in the shared storage buffer. Ingress policing and access control rules are applied to the received traffic and packets not compliant to the rules are discarded. Before a packet is fetched from the shared memory and transmitted on one or several of the egress interfaces, it is subjected to egress scheduling, rate shaping, and modification.

datasheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

3.10.1.1 Packet Flow

Figure 17 describes a packet data flow through various stages of the switch. The flow starts on the top right corner.

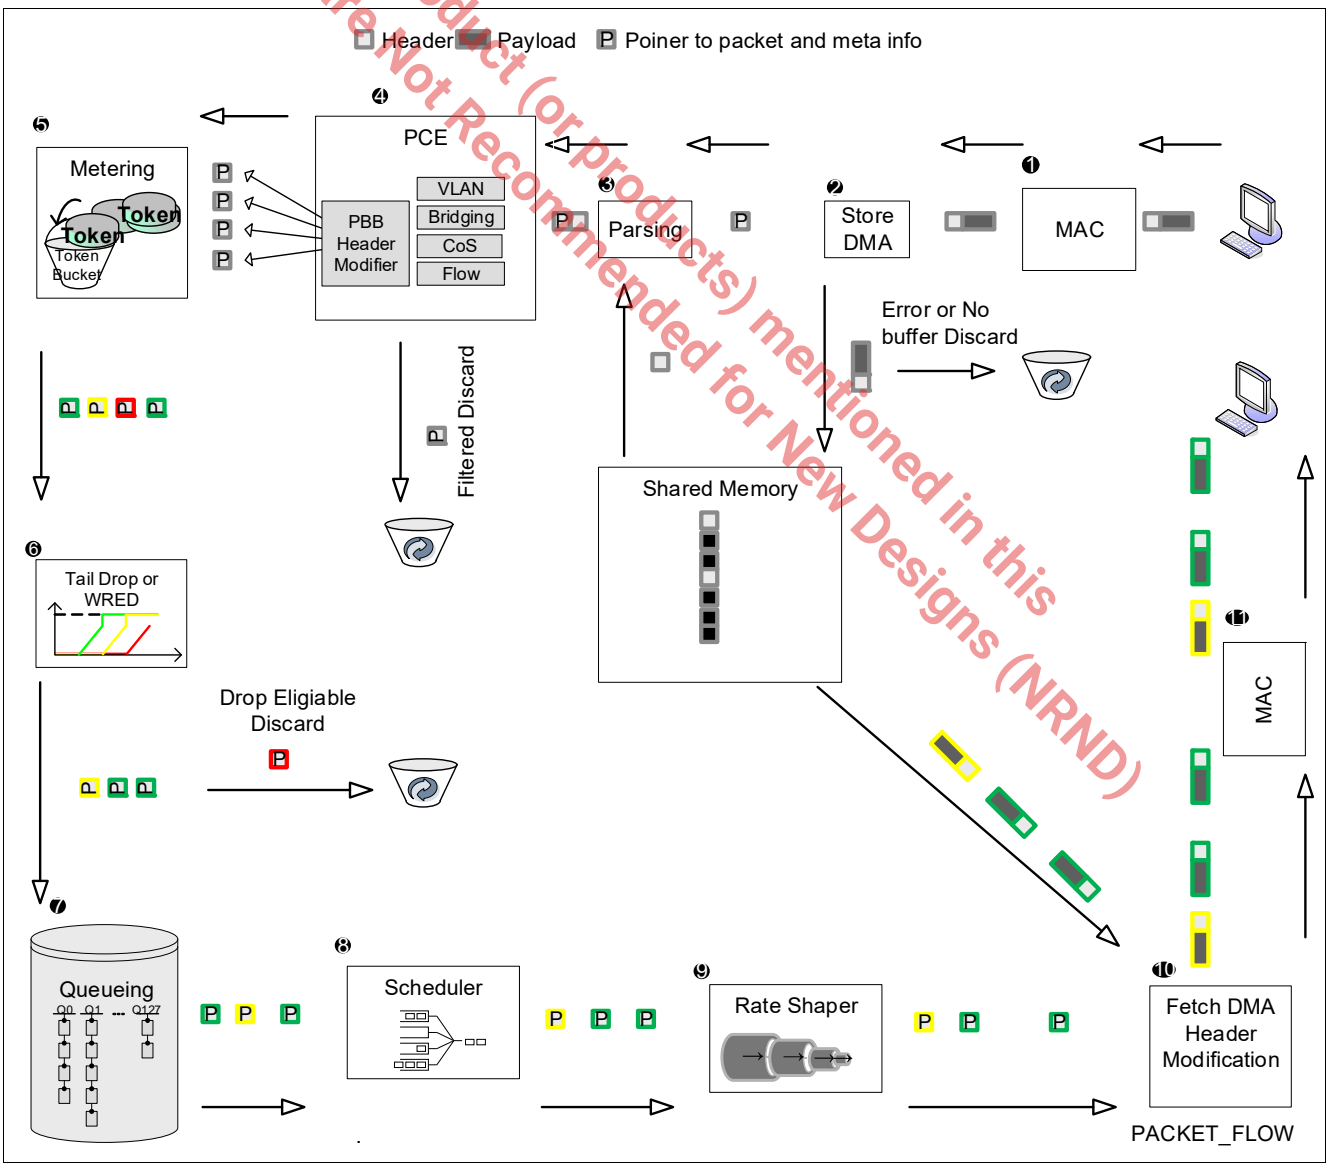


Figure 17 Packet Flow Diagram

The packet received on the ingress interface is first stripped from the Ethernet Preamble and checked for correct CRC. The behavior when a reception error occurs is programmable. This determines whether the packet is discarded or not.

The received packet is classified in the Packet Classification Engine (PCE). The packet is assigned to one or several appropriate QoS queues, such as broadcast or multicast. The packet classification filtering determines whether the received packet is discarded.

Prior to accepting it to a certain queue, the packet is subject to metering and Weighted Random Early Detection (WRED) functions. Packets marked as non-conforming by the metering engine might be discarded by the WRED algorithm based on the configurable drop precedence.

The scheduling function, Strict Priority (SP) and/or Deficit Weighted Round Robin (DWRR), determines which queue is allowed to emit a packet. Prior to transmission on the egress side, the packet is subject to Rate Shaping.

Packets scheduled for transmission are subject to egress specific header modification, such as, MAC address swap, special tag modification, OAM timer stamp modification, OAM packet counter field modification, DSCP and IP checksum modification, or VLAN tag modification.

Data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

3.10.1.2 Switch Fabric Control

For applications with MDIO-managed mode of operation, the switch fabric on the MxL86250C is controlled by a switch driver executed on the Host SoC. The control interface is the slave MDIO interface. The same interface is used to configure the PHY MDIO and MMD registers using the switch driver. The switch driver is part of the Host SoC API software documented in the MxL86250C API.

In unmanaged mode, the switch fabric is pre-configured using the FCA, documented in [1].

3.10.2 Ethernet Bridging

Ethernet bridging, or switching, is the primary task of the switch macro. The frames received on one of the ingress ports must be forwarded to the appropriate destination port. The destination port is determined by a lookup in the MAC bridging table. The MAC bridging table can be populated by software, using static entries, or entries can automatically be learned by the hardware learning function. The entries learned by the hardware can age out after a configurable time and are deleted from the MAC bridging table.

3.10.2.1 Parsing

The switch macro features a parser realized as a microcoded engine. This allows a flexible adaptation to any future protocol changes. The parser microcode evaluates the frame header and is capable of extracting all relevant information up to the layer 4 protocol from the frame. The microcode must be loaded otherwise only the MAC destination and MAC source address is extracted from the frame.

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

3.10.2.2 MAC Bridging Table

The MAC bridging table is realized as a hash table with four collision buckets and holds these components.

- Lookup key
  - MAC address
  - Forwarding identifier (FID)
  - VLAN tag
- Control information
  - Static indication
  - Aging timer
  - Changed indication
- Result
  - Port or port map
  - Sub-interface ID
  - Associated MAC address

A port map is a bitmap where each bit represents a single port. The port map allows to send the frame to multiple destination ports and is available for static entries only.

The switch macro supports learning, either Shared VLAN Learning (SVL), or Independent VLAN Learning (IVL). It is achieved by mapping the default customer VLAN ID or a flow to an FID used as part of the lookup key, together with the MAC address, for the MAC bridging table lookup. By default, the FID value is zero and all entries belong to SVL.

Entries are entered automatically by hardware using dynamic MAC address learning, or entered by software via manual learning. The software writes static entries into the MAC bridge table, but it is also possible to write dynamic entries which are subject to aging.

The MAC bridge table is able to hold unicast, multicast, or broadcast addresses. The table entries containing multiple egress ports as a destination are entered only as static entries by appropriate management action.

3.10.2.3 Layer 2 Security

The supported layer 2 security features comprise:

- IEEE 802.1X
- MAC learning limitation, allows only a limited number of MAC addresses to be learned on a port.
- MAC port locking and MAC spoofing detection, allows only frames with a previously learned MAC and PortID association.
- MAC table freeze, allows only frames with previously learned MAC addresses.
- Source MAC address filtering and destination MAC address filtering, filters user defined MAC addresses.

3.10.2.4 Spanning Tree Protocol Support

The switch macro supports the port states required for the Spanning Tree Protocol (STP) functionality. 16 spanning tree instances per port are supported. Each spanning tree instance is associated with least significant 4 bits of the FID and a port. The port state programmed for one FID does not have effect on the behavior of another FID of the same port.

These states are supported per STP instance:

- **Disabled**
  When disabled, all ingress frames are dropped, the source MAC address is not learned. All egress frames are discarded.
- **Blocking/Listening**
  In this state, all regular ingress and egress traffic is discarded. It is possible for Bridge Protocol Data Unit (BPDU) frames to ignore the port state and be forwarded to the STP managing entity. The source MAC address is not learned in this state.
- **Learning**
  In this state, all regular ingress and egress traffic is discarded. The source MAC address is learned in this state. It is possible for BPDU frames to ignore the port state and be forwarded to the STP managing entity.
- **Forwarding**
  Normal operation. Ingress and egress traffic is enabled for all frames.

3.10.2.5 Flow Control Function

To prevent buffer congestion and packet drop, the switch macro supports a flow control mechanism. In full duplex operation the sender is notified to start or stop the transmission via a PAUSE frame based on the IEEE 802.3x standard or a priority pause frame based on the IEEE 802.1Qbb standard. The switch macro is able to transmit or receive and react accordingly to 802.3x/802.1Qbb flow control frames. In half duplex operation, the switch macro supports a back pressure mechanism, specifically, a jam pattern is transmitted on the port forcing a collision. It is possible to enable or disable flow control on a per-port basis. When enabled, it depends on the auto-negotiation result of the attached PHY.

This list shows how flow control is applied:

- **Global Flow Control**
  Flow control is activated when the global buffer congestion level exceeds a programmable global threshold and is deactivated when the global buffer congestion level is below a programmable global threshold. Flow control applies to all enabled ports.
- **Ingress Port Congestion-Based Flow Control**
  Flow control is activated when the ingress port local buffer congestion level exceeds a programmable local threshold and deactivated when the local buffer congestion level drops below a programmable local threshold. Flow control applies to each port individually.
- **Ingress Port Metering-Based Flow Control**
  When the global buffer filling level exceeds a programmable global threshold, flow control is activated on the port that exceed the configured ingress rate. When the global buffer filling level drops below a programmable threshold or the traffic rate is reduced below the configured rate, flow control is deactivated on the port. See Section 3.10.5.4 for details regarding the metering based flow control and metering assignment.

3.10.2.6 Port Trunking Functions

The switch macro supports link aggregation according to IEEE 802.3ad. Link aggregation (LAG), also called port trunking, allows to combine multiple physical ports to a trunk for high bandwidth inter-switch links. It is possible to combine 64 physical ports to from a trunk, which is also known as a LAG group. There is no restriction on the port sequence or combination which are used for the trunk. When one link is broken or disabled for any reason, such as being powered off, the software or firmware detects and automatically reconfigures the mapping. It is not

Data Sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

possible for hardware to automatically switch to other working links. Up to 32 LAG groups are supported. The number of physical ports in a LAG group is not required to be a power of 2.

Figure 18 shows how packets received from all ports in a trunk are aggregated and how the packets are distributed to all ports in a trunk.

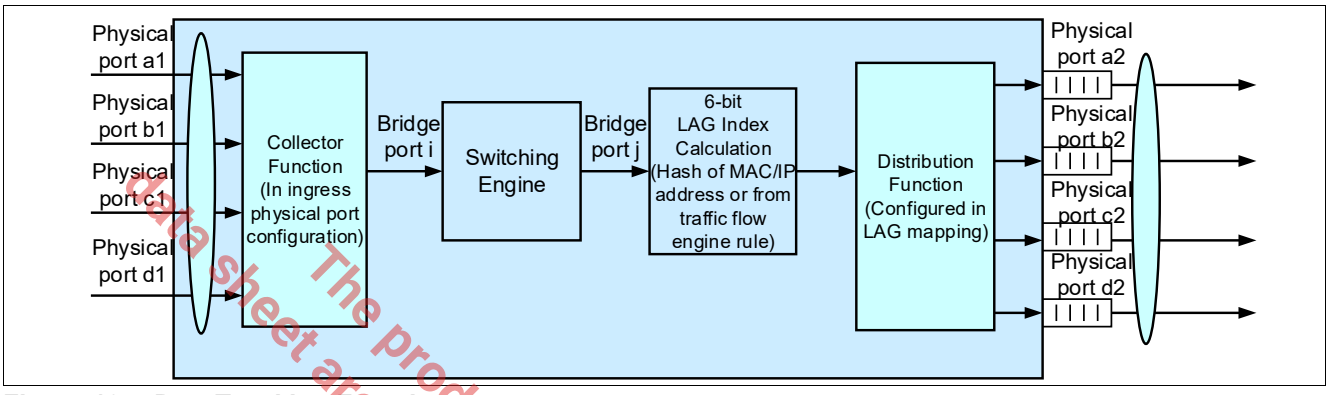


Figure 18 Port Trunking Function

The product (or products) mentioned in this data sheet are Not Recommended for New Designs (NRND)

3.10.3 VLAN Functions

This section describes Virtual Local Area Network (VLAN) bridging functionality.

A VLAN is a grouping of network devices logically segmented by functions or applications without regard to the physical location of the devices. Ports in a VLAN share broadcast traffic and belong to the same broadcast domain. Any traffic in one VLAN is by definition not transmitted outside of that VLAN. However, there are exceptions to this general rule which are configurable to cover certain system requirements.

This section provides more details regarding VLAN functionality.

3.10.3.1 VLAN Association

The VLAN classification function associates each packet received on the ingress side with a specific VLAN group. VLAN association is performed in one of two ways:

- **Implicit VLAN Association**
  The VLAN group is based on packet attributes. When the association is based on the ingress port it is called port-based VLAN. When the association is based on the MAC address, it is referred to as a MAC-based VLAN. When the association is based on selected packet header fields, such as Ethernet type, IP protocol, IP address subnet, or MAC address, it is referred to as a protocol-based VLAN.
- **Explicit VLAN Association**
  The VLAN group information is carried in a VLAN tag in the Ethernet header of the received packet. This association is referred to as a tag-based VLAN.

data sheet are Not Recommended for New Designs (NRND)
The Product (or product(s) mentioned in this

3.10.3.2 VLAN QinQ

IEEE 802.1QinQ is an Ethernet networking standard formally known as IEEE 802.1ad and is defined in the amendment IEEE 802.1Q-1998. It is for Ethernet frame formats. The technique is also known as provider bridging, stacked VLANs, QinQ, or Q-in-Q. The idea is to provide, for example, the possibility for customers to run their own VLANs inside service provider's provided VLAN. This allows a service provider to configure a single VLAN for a customer and allowing each customer to treat that VLAN as if it were a trunk.

The original 802.1Q specification allows a single VLAN header to be inserted into an Ethernet frame. QinQ allows multiple VLAN headers to be inserted into a single frame.

In this context, a QinQ frame is a frame that has two VLAN 802.1Q headers, and is referred to as a being double-tagged. A tag stack creates a mechanism for internet service providers to encapsulate customer-tagged 802.1Q traffic with service provider’s tag. The final frame is a QinQ frame.

A Service VLAN Tag (STAG) frame is identified by a Tag Protocol ID (TPID), which is typically $88A8_H$, but is programmable, and is followed by two bytes of the Tag Control Information (TCI) field. The TCI field consists of a 3-bit Priority Code Point (PCP) field, a 1-bit Drop Eligible Indicator (DEI) field, and a 12-bit VLAN Identifier (VID) field.

A Customer VLAN Tag (CTAG) frame is identified by a TPID, typically 8100_H, but is programmable, and is followed by two bytes of the TCI field. The TCI field consists of a 3-bit PCP field, a 1-bit DEI field, and a 12-bit VID field.

VLAN QinQ is supported with the extended VLAN tagging operation.

3.10.3.3 Extended VLAN Tagging Operation

Extended VLAN tagging operation is supported with a 1K entry table. Both symmetrical and asymmetrical ingress and egress tagging is supported, whereby the start and the end entry index are programmable per ingress port and per egress port independently. It is possible to cascade the ingress and egress extended VLAN tagging operation.

There are two parts in each entry: the filtering pattern and the action. The filtering pattern includes VLAN priority, VLAN ID, TPID/DEI of both STAG and CTAG and the Ethertype. It is configurable to base on the intermediate

VLAN tags, after modification in the previous processing stage, or the original ingress VLAN tags, before any modification, per entry.

The actions of the tagging operation corresponding to each matched rule includes the discard/forwarding action, STAG and CTAG removal/insertion/replacement, DSCP remarking, traffic class assignment, bridge port reassignment, metering assignment, mirroring enable/disable, loop-back enable with DA/SA swap.

It is only possible to insert, remove, or replace two VLAN tags. If both an ingress extended VLAN tagging operation and an egress extended VLAN tagging operation are enabled, any configuration which requires the insertion/removal/replace of more than two VLAN tags is illegal.

Discarded packets by ingress extended VLAN tagging operation are trappable by traffic flow classification engine for forwarding. When cross-VLAN is enabled, discard actions by the extended VLAN tagging operation are ignored.

Data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

3.10.3.4 VLAN Filtering

It is possible to forward or discard a received frame based on the VLAN group configuration and configured port attributes. VLAN filtering is based on the STAG VLAN TCI, after it has been modified in a previous processing stage. The filtering is applicable to all ingress ports, after the ingress extended VLAN tagging operation, and egress ports, before egress extended VLAN tagging operation. Both symmetrical and asymmetrical VLAN filtering are supported.

The VLAN TCI field comprises the VLAN ID, PCP and DEI field. These VLAN filtering mask options are supported in ingress and egress port configuration:

- **VID-Only Mode**
  In VID-only mode, the VLAN ID field is used for VLAN filtering lookup.
- **PCP-Only Mode**
  In PCP-only mode, the PCP field is used for VLAN filtering lookup.
- **TCI Mode**
  In TCI mode, all 16-bit TCI is used for VLAN filtering lookup.

It is possible to configure the VLAN rules to discard or forward VLAN-tagged traffic which does not match any of the three filtering rules. For VLAN untagged traffic, it can be configured to be discarded or forwarded.

It is possible to configure each ingress port to filter according to a list of different TCI or mask patterns. Each egress port supports up to 2 such lists. These lists are sharable between ports and contain up to 1,000 TCI or mask patterns.

3.10.3.5 VLAN Transparent Mode

VLAN transparent mode is configurable per ingress port.

If VLAN transparent mode is enabled, VLAN tags at ingress are treated as part of the payload and the packets are considered as untagged.

Several exceptions apply to VLAN transparent mode, they are:

- **Traffic Flow Classification - Ingress VLAN ID**
  Transparent mode is ignored when the pattern field of a VLAN is based on the ingress VLAN ID. The ingress-tagged packets are still considered as tagged packets regardless of transparent mode setting.
- **Traffic Flow Classification - STAG PCP+DEI and CTAG PCP+DEI**
  Transparent mode is ignored when STAG PCP+DEI and CTAG PCP+DEI is based on ingress packets. The ingress-tagged packets are still considered as tagged packets regardless of the transparent mode setting.
- **Traffic Class Mapping**
  PCP+DEI in ingress STAG and PCP in ingress CTAG are used for traffic class mapping regardless of transparent mode setting.

3.10.3.6 Cross-VLAN Functionality

Ethernet frames that are classified as cross-VLAN cross the VLAN boundaries. They ignore any of the VLAN filtering modes for the ingress or egress ports, and any discard action in the extended VLAN tagging operation for the ingress or egress ports.

Cross-VLAN classification is performed as part of the traffic flow classification function.

The product (or products) mentioned in this data sheet are Not Recommended for New Designs (NRND)

3.10.4 Multicast Forwarding Functions

Multicast forwarding is a method of forwarding Ethernet frames or IP datagrams to a group of receivers. A basic Ethernet switch floods all received multicast frames to all output ports even when no host on a port is interested in that particular multicast stream. This waste of bandwidth is avoided by the sophisticated multicast handling of the switch macro which allows the forwarding of multicast frames based on layer 2 or layer 3 addresses to dedicated ports. In addition, the switch macro is able to learn layer 3 multicast group addresses via IGMPv1/2/3 and MLDv1/2 snooping.

3.10.4.1 Layer 2 Multicast Forwarding

The layer 2 multicast forwarding function deals with multicast frame forwarding based on the Ethernet MAC address. The destination port map is looked up in the bridging table. The multicast addresses are not added to the bridging table by automatic learning function and must be configured manually, by an appropriate management action. The associated port map contains all the relevant port members. When the destination MAC address of the received frame matches the entry in the bridging table and the forwarding mode is layer 2 only or there was no match in the layer 3 multicast table, or the packet is non-IP multicast, the frame is delivered to all the destinations specified in the associated port map.

3.10.4.2 Layer 3 Multicast Forwarding

The layer 3 multicast function deals with multicast frame forwarding based on the IPv4 or IPv6 network address. The destination port map is looked up in the layer 3 multicast table.

The lookup in the multicast table is performed using the destination IPv4/IPv6 address, the source IPv4/IPv6 address, and FID. The addresses in the table are added by an appropriate management action.

3.10.4.3 IGMP and MLD Snooping

The switch macro supports Internet Group Management Protocol (IGMP) and Multicast Listener Discovery (MLD) snooping. IGMP/MLD snooping is designed to prevent hosts on a local network from receiving traffic for a multicast group they have not explicitly joined. It provides a mechanism to prune multicast traffic from links that do not contain a multicast listener, which is an IGMP/MLD group member. IGMP/MLD snooping requires the switch macro to examine, or snoop, some layer 3 information in the IGMP/MLD packets sent between the hosts and the router. In addition, adjacent routers also use these protocols to communicate and share routing information. It is also possible to snoop the exchange information to identify the multicast router port.

The switch macro supports software-based IGMP/MLD snooping mode for the IGMPv1/2/3 or MLDv1/2 protocols. In this mode, specific IGMP/MLD reports can be intercepted by the switch and delivered to the CPU or network processor port. The reports are analyzed by the CPU and the layer 3 multicast table is populated by the software with appropriate source or destination addresses.

data sheet are Not Recommended for New Designs (NRND)
The product(or products) mentioned in this

3.10.5 Quality of Service Functions

The switch macro provides extensive support for Quality of Service functionality. Traffic class assignment based on multiple flow parameters, ingress traffic policing, multiple egress queues per port with strict or WFQ scheduling, traffic shaping, and Weighted Random Early Detection (WRED) functions are supported.

This section describes the QoS functions supported by the switch.

3.10.5.1 Class of Service Assignment

The switch macro supports classification of the incoming traffic into traffic classes or classes of service (CoS). It is possible to manage each traffic class differently, be it remarked, policed, or shaped, ensuring preferential treatment for higher-priority traffic on the network. Supported RFCs include RFC2474 and RFC2597.

Up to 16 different traffic classes are supported and mapped individually to appropriate QoS queue. See **Section 3.10.5.3** for more details regarding queue mapping.

data sheet are not Recommended for New Designs (NRND)

3.10.5.2 Remarking Function

The switch macro supports the remarking of the Differentiated Services Code Point (DSCP), the (re)generation of the STAG PCP&DEI, and the (re)generation of the CTAG PCP&DEI in the egress frame. The modification of the code points in the outgoing packets is based on both traffic class and egress port. The switch macro provides a dedicated mapping table to assign the new DSCP, CTAG PCP&DEI, and STAG PCP&DEI according to traffic class, as well as the egress port. **Figure 19** shows how to remark DSCP, including drop precedence, CTAG PCP, CTAG DEI, STAG PCP, and STAG DEI based on any of the class of service assignment parameters.

Remarking is enabled on a per ingress port basis. It is also possible to disable remarking on a per egress port and per code point basis. In addition, the traffic flow table allows disabling remarking explicitly for certain flows.

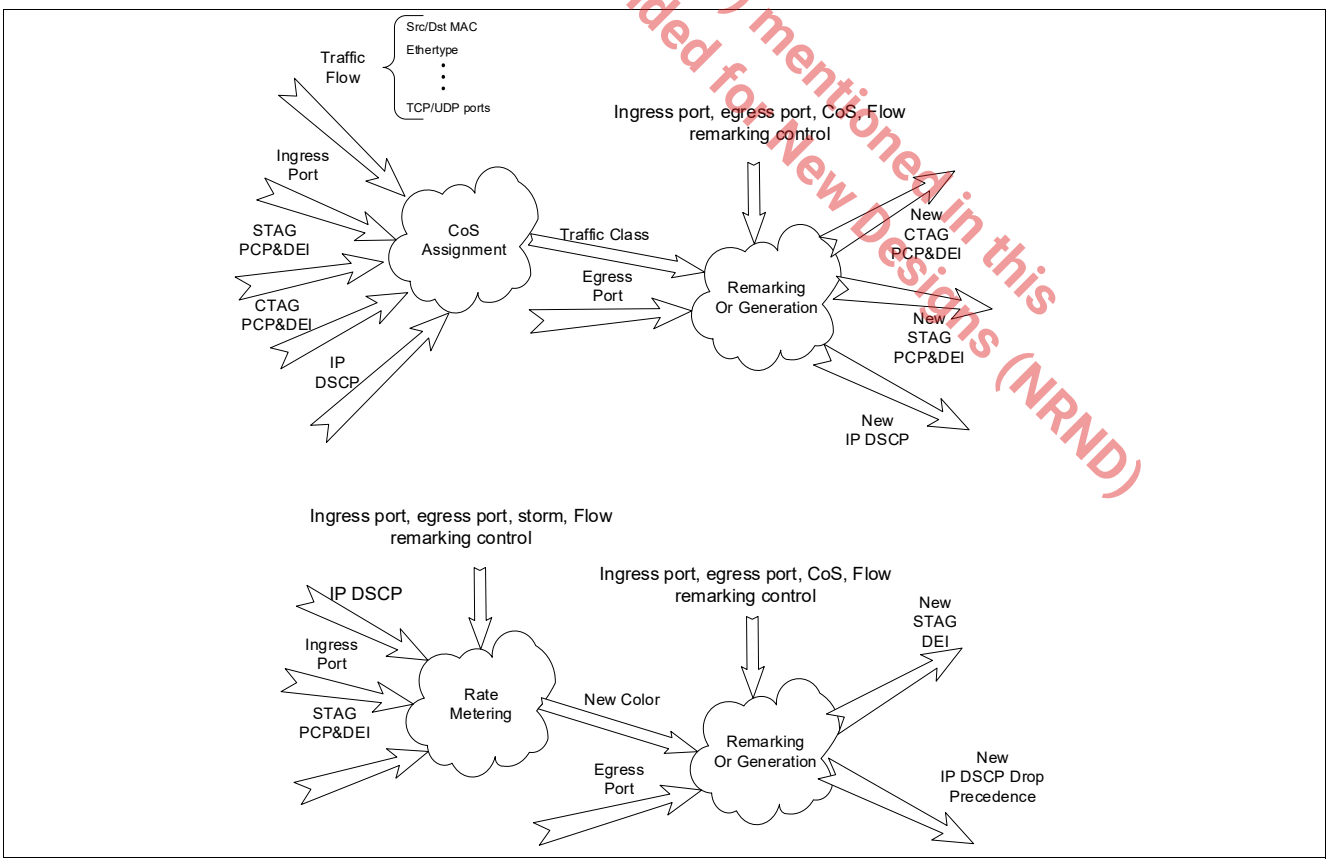


Figure 19 PCP/DSCP/DEI Remarking

3.10.5.3 Queue Mapping

The switch macro supports 128 egress QoS queues which are flexibly assignable to egress ports and traffic classes. For each egress physical port, up to 16 priority queues are assignable. This section provides more details about the queue mapping functionality.

Queue to Port Mapping

By default, each egress port has 8 QoS queues. Depending upon application, it might be desirable to have a different number of QoS queues on specific ports. The switch macro supports flexible queue to port mapping, assuming that the queues assigned to one egress physical port are consecutive and the total number of queues per port do not exceed 16. This way the default configuration can be changed so that one port, for example, contains 16 queues.

In addition, an active port must have at least one queue and can have maximum 16 queues assigned to it.

Port, Traffic Class to Queue Mapping

Incoming frames are being stored in the appropriate queues based on the egress port and the traffic class assignment. The mapping of the traffic class to queue is specified in a dedicated queue mapping table per egress port. The mapping of the traffic classes to queues is related to the number of the queues available on a certain port. For example, on one port, four traffic classes are mappable to four different queues, while on another port, all four traffic classes are mappable to one single queue.

3.10.5.4 Rate Metering

The switch macro supports 128 instances of a Two Rate Three Color Marker (trTCM) rate metering. Each marker or meter measures the rate of a packet stream and marks the packets as green, yellow, or red. When there is no metering instance assigned to a traffic stream, the stream is considered to be green and in color-blind mode. In color-aware mode, the stream is colored based on the drop precedence encoded in the frame.

It is possible to use the color markings later for policing in the active congestion management function, see Section 3.10.5.7 for details. In addition, the markings are usable to remark the drop precedence of the outgoing packet in the DSCP and STAG DEI.

The supported metering algorithm in Single Rate Three Color Marker (srTCM) is defined in RFC2697. The supported metering algorithm in trTCM are the non-coupling mode as defined in RFC4115 and the coupling mode as defined in the Metro Ethernet Forum (MEF). It is only possible to assign a single meter instance to measure the rate of a traffic flow.

Critical Frames

Frames are classified as critical based on a rule configured in the traffic flow table. Critical frames bypass the metering instance and do not trigger the active congestion management function.

Color-aware and Color-blind Modes

The switch macro supports color-awareness modes which are configurable per ingress port. In color-aware mode, the meter assumes that some preceding entity has pre-colored the incoming packet stream so that each packet is either green, yellow, or red. The ingress color of the incoming frame is based on either DSCP value or STAG PCP&DEI value. It is retrieved from the appropriate DSCP mapping table or STAG PCP&DEI mapping table. Non-IP and non-STAG packets are treated as pre-colored to green.

In color-blind mode, all packets are treated as green.

DSCP Drop Precedence Remarking

DSCP drop precedence remarking is enablable in both the ingress port configuration and the egress port configuration by replacing the lower three bits of the received DSCP field with the value of appropriate color

Datasheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

decided by the metering instance for the received packet. The mapping of the color to the lower three bits of the DSCP is configurable per egress port. See **Section 3.10.5.2** for details.

DEI (Re)generation

DEI regeneration is enabled by both ingress port and egress port configuration to reflect the metering result by setting the STAG DEI field of the packet with the value of appropriate color decided by the metering instance for the received packet. The mapping of the color to the DEI is configured per egress port. See **Section 3.10.5.2** for details.

Metering-based Flow Control

When a metering instance is assigned to an ingress port, the conformance rate of the port is usable for triggering flow control. See **Section 3.10.2.5** for details.

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

3.10.5.5 Rate Shaping

The switch macro supports 128 instances of rate shaper instances. Each rate shaper is configurable to either token bucket mode or credit rate shaper mode. Each shaper measures the rate of an egress queue and prevent the queues which exceeded the configured rate from being scheduled for the next packet transmission. Shaping is based on a Committed Information Rate (CIR) and an associated Committed Burst Size (CBS). A queue is selectable for transmission only when it does not exceed the CBS for a given CIR.

Up to two shaping instances can be assigned to measure the egress rate of a specific queue or number of queues. Two shapers are typically assigned to measure the peak and committed rate and typically have different CIR settings. It is possible for any number of queues to share the same shaping instance. In this situation, the committed rate and the burst size are shared among the assigned queues.

When there is no shaper assigned to a queue, the queue rate is not monitored. MaxLinear recommends assigning a shaper for queues with high scheduling weights or strict priority queues. See **Section 3.10.5.6** for details regarding queue scheduling.

3.10.5.6 Queue Scheduling

The scheduling function determines which queue is allowed to emit a packet. Queue scheduling is done after rate shaping. The switch macro supports these scheduling types for each one of the 128 egress QoS queues:

- **Weighted Fair Queueing (WFQ)**
  For a given port, packets in the WFQ queues are scheduled for transmission in accordance with their configured weight. The weight represents a ratio for transmission. The higher the weight of one queue compared to another, the more this queue is scheduled for transmission.
  For example, a queue with a weight of 4000 is served twice as often than a queue with a weight of 2000.
- **Strict High Priority**
  For a given port, packets in the strict high priority queue are scheduled for transmission before any packet in the WFQ queue. When there are multiple strict high priority queues configured for a port, the queues with a higher physical number are scheduled first.
- **Strict Low Priority**
  For a given port, packets in the strict low priority queue are scheduled for transmission after any packet in the WFQ queue. When there are multiple strict low priority queues configured for a port, the queues with a higher physical number are scheduled first.

3.10.5.7 Congestion Management

The switch macro provides protection for the internal buffer from congestion and overflow.

When the shared buffer is fully occupied and does not have enough resources to receive any new frame, the incoming frames on all ports are discarded, until the congestion condition is relieved. See **Section 3.10.2.5** for flow control activation.

The switch macro also provides two segment thresholds per color globally and per color per egress queue. For every incoming packet, a decision is made whether to enqueue it or not, which is based on the configured thresholds of the respective packet color, and the global, port or queue segment filling level. This protection mechanism is called Active Congestion Management (ACM).

The color of the packets is decided based on the conformance rate in the metering instance. See **Section 3.10.5.4** for details. The thresholds are checked with accordance to the incoming packet color. For example, red thresholds apply to red-colored packets, yellow for yellow-colored packets, and green for green-colored packets.

The switch macro is able to reserve a buffer per egress queue. This allows the protection of queues against congestion caused by other queues and ports. It provides a minimum buffer guarantee for each queue. A green frame is permitted to bypass ACM and is always accepted by the queue when the reserved buffer threshold of the queue is not exceeded.

Critical frames bypass the ACM and are enqueued regardless of the filling level. Critical frames are not enqueued only in case of a buffer full event or a packet pointer full event.

The ACM function discards the frames early, before the buffer full event, with a certain drop probability. ACM thresholds provide three functionalities:

- **Minimum (MIN) Threshold**
  When the filling level of the queue is below this threshold, excluding the threshold value, the packet with the appropriate color is not discarded and is enqueued.
- **Maximum (MAX) Threshold**
  When the filling level of the queue is above this threshold, excluding the threshold value, the packet with the appropriate color is discarded.
- **½(Maximum-Minimum) ½(MAX-MIN) Threshold**
  When the filling level of the queue is between the MIN and MAX thresholds, the packet is discarded with certain probability. The drop probability profile is selectable globally between 25%, 50% and 75%. When the filling level is below half the distance between the minimum and maximum thresholds, the packet is discarded with a lower probability (P_{min}), when the filling level is above half the distance between the minimum and maximum thresholds, the packet is discarded with a higher probability (P_{max}).

3.10.5.8 Egress Queue Congestion Notification

802.1Qau operates in the link layer to provide a means for a bridge to notify a source of congestion allowing the source to reduce the flow rate.

In switch macro, the congestion level of each egress queue is monitored. If the congestion level is greater than 1/4 of green maximum threshold, congestion status of the egress queue is set to `1`. If the congestion level is lower than 1/4 of green minimum threshold, congestion status of the egress queue is cleared to `0`.

3.10.5.9 Storm Control

The switch macro supports a broadcast storm control function. A broadcast storm is defined as an excessive amount of broadcast, multicast, or unknown unicast Ethernet frames received on a switch port. Due to the massive replication of data frames, broadcast storms significantly degrade the system performance. Intentional broadcast storms are a form of Denial-of-Service (DoS) attack.

The storm control function effectively polices specific traffic type and protect the resources from being flooded by broadcast traffic.

The selected metering instance is configured to the required policed rate of the broadcast storm. Several traffic types are selectable for the storm control function:

- Broadcast frames

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

- Unknown multicast frames
- Unknown unicast frames

When the rate of the selected frame types exceeds the rate configured in the meter instance, the frames are marked as either yellow or red. When the active congestion management thresholds are configured appropriately, the storm frames are discarded.

The product (or products) mentioned in this data sheet are Not Recommended for New Designs (NRND)

3.10.6 Flow Classification Function

The switch macro includes a powerful packet classification engine which performs multi-field classifications based on up to 512 programmable rules.

Traffic Flow Table

The traffic flow table contains up to 512 programmable rules. Rules are configurable per ingress port, but are also sharable between ports. Each rule consists of a pattern section and an action section. A pattern specifies certain combination of packet header fields. The parser extracts the packet header fields from the received packet and provides them to the traffic flow table. When a pattern matches, the enabled actions apply. The pattern search continues until all actions are satisfied. This allows the definition of multiple pattern for different actions. It is possible to enable or disable an action for a given pattern.

The location of a rule in the table defines its priority. A rule with a lower index number has higher priority. The traffic flow table is searched using pattern matching and action matching.

- **Pattern Match:**
  A pattern row is considered matched when all of the fields in the pattern have been matched, not matched, or configured to be ignored. When a pattern row matches, the appropriate action row is checked for that pattern.
  Note: It is possible for multiple pattern rows in a table to match the search, but only the first pattern in the table matched for certain action is applied.
  The supported patterns include the source port information, packet length, and multiple L2/L3/L4/L4+ packet fields.
- **Action Match:**
  Each action in the action row can be enabled or disabled for certain pattern row match. When the action is enabled and the pattern row matched, this action is applied for the classified packet. The search in the table terminates only when all the actions in the action section have been found. When not, the search continues for the next pattern match and the corresponding action match. An additional option is to enable the action and to select a default behavior for that action, in other words, the search for another enabled action is terminated.
  Note: For a given packet classification only one pattern may match one specific action, however, multiple patterns may match multiple different actions, in other words, the action section is searched independently for each action type.
  The supported actions include destination port(s) assignment (including discard option), port filtering, traffic class assignment, traffic meter assignment, extended VLAN tagging operation assignment, flow counter assignment, OAM handling assignment, cross VLAN policy, cross state policy, color assignment, Link Aggregation Group (LAG) assignment, L2 MAC address learning policy, and interrupt policy.

Data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

3.10.7 Operation, Administration, and Management Functions

This section summarizes the functions provided to control and monitor the data traffic through the switch.

3.10.7.1 Monitoring Counters

Multiple counters are provided per port to monitor incoming and outgoing data traffic as well as errors or special events. Each port provides the same set of counters. The groups of counters are:

- A set of standard Ethernet counters, also known as RMON counters in RFC2819.
- A group of counters assigned to programmable traffic flows.
- A group of counters for metering.
- A group of counters for MAC learning discard events.

3.10.7.2 Port Mirroring

The switch macro supports port monitoring and port redirection to assist in system debugging or to enable a software-controlled functionality. The data received on a selected port may be mirrored or redirected to another selected port (the monitoring port).

Mirroring Function

Ingress mirroring means the received frame is processed and forwarded as normal, but a copy of that frame is in addition sent to the monitoring port.

Egress mirroring means that the transmitted frame is forwarded as normal, but a copy of that egress frame (with modification) is in addition sent to the monitoring port.

The options given by the port mirroring function are:

- Copy data received on a selected port to the monitoring port.
- Copy data received on a selected group of ports to the monitoring port.
- Copy data transmitted on a selected port to the monitoring port.
- Copy data transmitted on a selected group of ports to the monitoring port.
- Copy data received or transmitted on a selected port to the monitoring port.
- Copy data received or transmitted on a selected group of ports to the monitoring port.

Figure 20 and **Figure 21** provide illustrations on the ingress and egress monitoring.

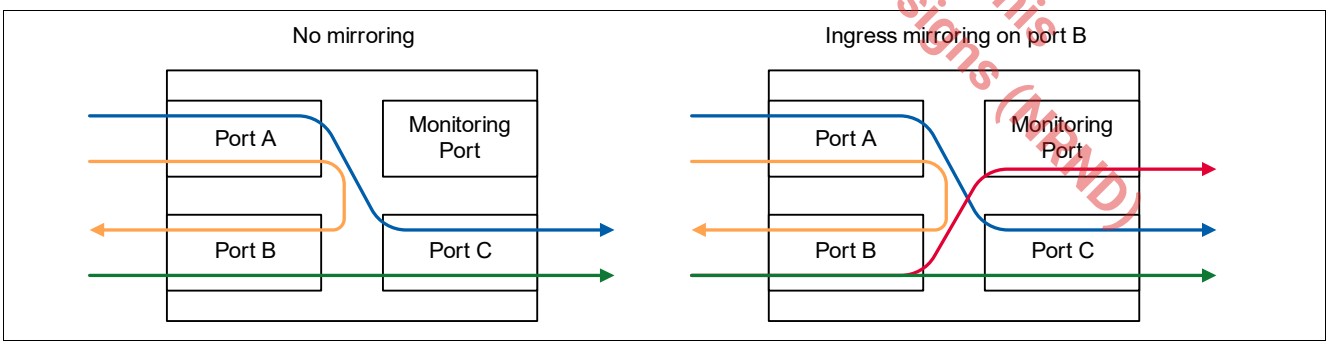


Figure 20 Port Mirroring Examples – Ingress Monitoring

data sheet are Not Recommended for New Designs (NRND)
The Product (or products) mentioned in this

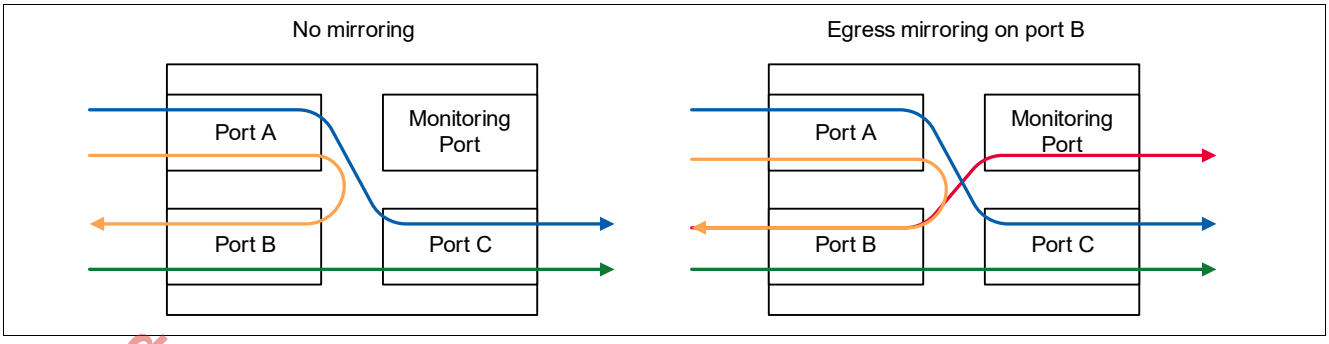


Figure 21 Port Mirroring Examples – Egress Monitoring

Mirroring is also usable to create diagnostic loopbacks, when the ingress port is identical to the monitoring port.

Error Monitoring

The mirroring function is used to monitor frames otherwise dropped due to reception errors, packet filtering, or violation of certain classification rules. In this case, the received frame is only delivered to the monitoring port and not to the target egress port defined in the egress port map.

It is possible to explicitly enable error monitoring for frames which contain MAC errors or when the MTU has been exceeded.

Egress Redirection Function

Egress redirection means that the received frame is processed but not forwarded as normal. Instead, that frame is sent to another MAC. **Figure 22** provides an illustration. The figure shows an egress traffic port B, which is the destination port, redirected to port D, the redirection port. Egress traffic is counted in port B's transmit counters. Egress packets are treated according to the configuration for port B.

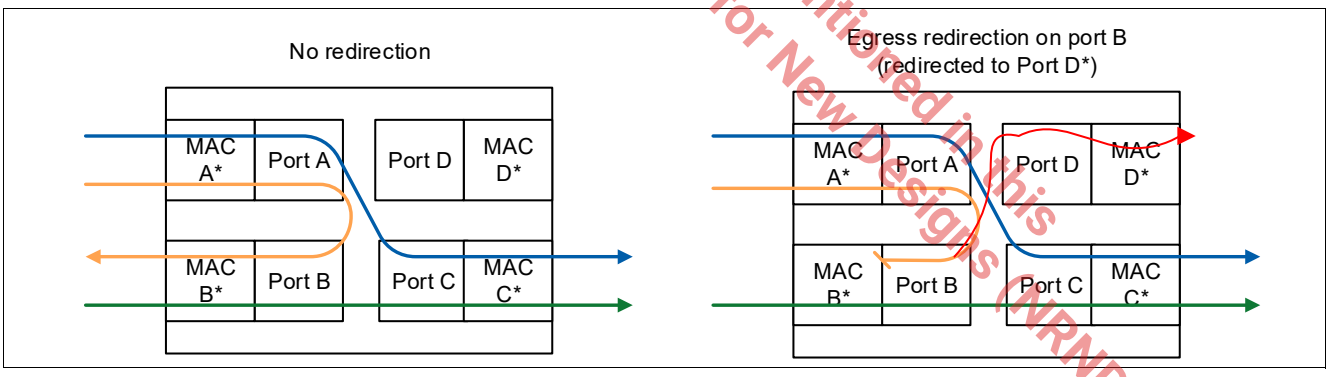


Figure 22 Port Redirection Examples – Egress Redirection

data sheet are Not Recommended for New Designs (NRND)
The product(or products) mentioned in this

3.10.7.3 Special Tag Functionality

The special tag is used to override the forwarding and QoS functionality of the switch on the ingress side and to provide additional frame-status information on the egress side.

The special tag is identified by the special Ethertype field located after the source MAC address in the Ethernet frame. This allows the transmission of the frame via an Ethernet network to a remote receiver. The special tag content has a fixed length of 6 bytes. For internal communication or point-to-point communication it can be configured per egress port when the frame contains additional content in place of the Ethertype. This option is only available at egress direction, in ingress direction always an Ethertype is expected. See **Figure 23**.

The pause frames generated by the MAC do not contain a special tag. This may result in a mix of frames with and without a special tag on one egress port. Frames with a special tag which do not use the special Ethertype are

distinguishable from pause frames because pause frames have an Ethertype of 0x8808 while the first nibble after the MAC addresses is 0 for frames with a special tag.

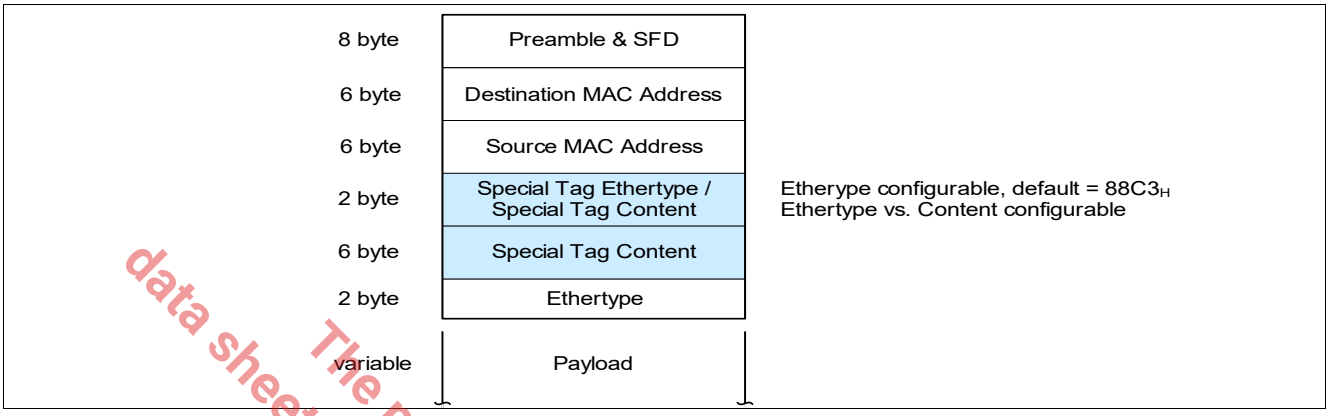


Figure 23 Special Tag Location in the Frame

Note: The special tag is used on the CPU port of the switch.

The content format of the special tag is different for the ingress and the egress.

Ingress Special Tag

The ingress special tag is used to override the classification function and the default frame forwarding of the switch. Special tag detection on ingress is enabled or disabled per port. When the detection is disabled, the frame containing a special tag is treated as regular frame and the content of the frame is ignored.

When the ingress special tag detection is enabled, the content of the tag is used for the frame forwarding decision. The ingress special tag must always have a special tag Ethertype. See **Table 23** for details.

Table 23 Special Tag Ingress Format

Byte	Bit	Description
0	[7:0]	**Ethertype MSB** Byte 1 Configurable. Default 88_H.
1	[7:0]	**Ethertype LSB** Byte 2 Configurable. Default $C3_H$.
2	[7]	**Reserved** Reserved. This field is not used internally by the switch.
2	[6:4]	**Sub-interface ID [14:12]** See the Sub-interface ID portions of this table for a description.
2	[3:0]	**Traffic Class** Target traffic class. This field is valid only when traffic class enable is set
3	[7]	**Pre-L2: Bit 1** See below for description of Pre-L2 size.
3	[6]	**OAM Flag (OAM)** This is OAM packet (Delay measurement and loss measurement packet) 0_B **Disable** Not OAM packet 1_B **Enable** OAM packet

data sheet are Not Recommended for New Designs (NRND)
The Product (or products) mentioned in this

Table 23 Special Tag Ingress Format (cont'd)

Byte	Bit	Description
3	[5]	**Forced Learning Disable (LNMD)** Forced leaning disable control 0_B **Ignore** Leaning enable or disable is determined by the switch configurations 1_B **Disable** Learning is forced to be disabled regardless of the switch configurations.
3	[4]	**Traffic Class Enable (TC_EN)** Traffic class enable 0_B **Ignore** traffic class is determined by the switch configurations. 1_B **Enable** traffic class is determined in special tag traffic class field.
3	[3]	**Insertion Flag (INS)** This is special packet (For example, Ethernet OAM or IGMP packets) and is inserted by CPU to the data path 0_B **Disable** Not insertion packet 1_B **Enable** insertion packet.
3	[2]	**Extraction Flag (EXT)** This is special packet (For example, Ethernet OAM or IGMP packets) and is extracted to CPU from the data path 0_B **Disable** Not extracted packet 1_B **Enable** Extracted packet.
3	[1:0]	**Packet Type (PKT_TYPE)** 00_B **Ether** Ethernet packet 10_B **802.11** 802.11 format $X1_B$ **Reserved** Reserved.
4	[7]	**Pre-L2: Bit 0** Pre-L2 size in special tag does not include PMAC header and special tag. Pre-L2 size in packet descriptor includes PMAC header. 00_B **NIL** No Pre-L2 header 01_B **16B** 16B Pre-L2 header 10_B **32B** 32B Pre-L2 header 11_B **48** 48B Pre-L2 header
4	[6]	**Reserved**
4	[5]	**Reserved**
4	[4]	**Sub-interface ID [15]** See below for description of sub-interface ID.
4	[3:0]	**Sub-interface ID [11:8]** See below for description of sub-interface ID.
5	[7:0]	**Sub-Interface ID [7:0]** For ingress special tag For packet with "Egress= 0" & "INS=1", it carries source sub-interface ID. For packet with "Egress = 0" & "INS=0", it caries source sub-interface ID. For packet with "Egress = 1" & "EXT=0", it carries destination sub-interface ID. For packet with "Egress = 1" & "EXT=1", it carries source sub-interface ID. For egress special tag: For "EXT=0", it carries destination sub-interface ID. For "EXT=1", it carries source sub-interface ID.
6	[7:0]	**Record ID [11:4]** It is used for logging information for PTP and OAM packets

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

Table 23 Special Tag Ingress Format (cont'd)

Byte	Bit	Description
7	[7:4]	**Record ID [3:0]** It is used for logging information for PTP and OAM packets
7	[3:0]	**Source or Destination Logical Port ID (IGP/EGP)** For ingress special tag: For packet with "Egress= 0" & "INS=1", it carries source LPID. For packet with "Egress = 0" & "INS=0", it caries source LPID. For packet with "Egress = 1" & "EXT=0", it carries destination LPID. For packet with "Egress = 1" & "EXT=0", it carries source LPID. For egress special tag For "EXT=0", it carries destination LPID. For "EXT=1", it carries source LPID.

Note: Bytes are defined as MSB = bit 7 and LSB = bit 0.

Table 24 describes the encoding of the traffic class enable fields of the special tag content.

Table 24 Traffic Class Map Coding

Traffic Class Enable	Resulting Traffic Class
0	The traffic class is based on the classification result in switch.
1	The traffic class is taken from the special tag (classified traffic class ignored).

An additional *Force No Learning* action flag is available in the ingress special tag. This action disables the learning of the source MAC address of the received frame in the MAC bridging table

The special tag detected on the ingress side is not delivered to the egress side. The tag is removed prior to transmission.

Egress Special Tag

The egress special tag contains the status and debug information of the switch. Special tag transmission on egress is enabled or disabled per egress port. When egress special tag is disabled, no special tag is inserted in the egress frame. When egress special tag function is enabled, each egress frame transmitted on that port contains the special tag.

See Table 25 for more details regarding the egress special tag format.

Note: Bytes are defined as MSB = bit 7 and LSB = bit 0.

Table 25 Special Tag Egress Format

Byte	Bit	Description
0	[7:0]	**Ethertype** Byte 1 Configurable. Default 88_H
1	[7:0]	**Ethertype** Byte 2 Configurable. Default: $C3_H$
2	[7]	**Reserved** Reserved. This field is not used internally by the switch.
2	[6:4]	**Sub-interface ID [14:12]** See below for description of sub-interface ID.

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

Table 25 Special Tag Egress Format

Byte	Bit	Description
2	[3:0]	**Traffic Class** Traffic class of the packet determined by the switch QoS classification.
3	[7]	**Pre-L2: Bit 1** See below for description of Pre-L2 size.
3	[6]	**OAM Flag (OAM)** This is OAM packet (Delay measurement and loss measurement packet) 0_B **Disable** Not OAM packet 1_B **Enable** OAM packet
3	[5]	**Reserved** This field is fixed to 0.
3	[4]	**Reserved** This field is fixed to 0.
3	[3]	**Insertion Flag (INS)** This is special packet (For example, Ethernet OAM or IGMP packets) and is inserted by CPU to the data path. 0_B **Disable** Not insertion packet 1_B **Enable** Insertion packet
3	[2]	**Extraction Flag (EXT)** This is special packet (For example, Ethernet OAM or IGMP packets) and is extracted to CPU from the data path. 0_B **Disable** Not extracted packet 1_B **Enable** Extracted packet
3	[1:0]	**Packet Type (PKT_TYPE)** 00_B **Ether** Ethernet packet 10_B **802.11** 802.11 format $X1_B$ **Reserved** Reserved.
4	[7]	**OAM Flag (OAM)** This is OAM packet (Delay measurement and loss measurement packet) 0_B **Disable** Not special OAM packet 1_B **Enable** Special OAM packet
4	[6]	**Reserved**
4	[5]	**Reserved**
4	[4]	**Sub-interface ID [15]** See below for description of sub-interface ID.
4	[3:0]	**Sub-interface ID [11:8]** See below for description of sub-interface ID.
5	[7:0]	**Sub-Interface ID [7:0]** For “EXT=0”, it carries destination sub-interface ID. For “EXT=1”, it carries source sub-interface ID.
6	[7:0]	**Record ID MSB bit 11 to 4.** It is used for logging information for PTP and OAM packets

data sheet are Not Recommended for New Designs (NRND)
The Product (or products) mentioned in this

Table 25 Special Tag Egress Format

Byte	Bit	Description
7	[7:4]	**Record ID MSB bit 3 to 0.** It is used for logging information for PTP and OAM packets
7	[3:0]	**Source or Destination Logical Port ID (IGP/EGP)** For “EXT=0”, it carries destination logical port ID. For “EXT=1”, it carries source logical port ID.

3.10.7.4 Loop Detection

The loop detection feature detects a loop in the network and triggers an alarm, which is usually indicated by an LED. It does not prevent the loop like STP, so a network administrator must be able to clearly see the alarm and resolve the loop by manual means. The violating ports are not disabled by means of any protocol.

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

4 MDIO and MMD Register Interface Description

This chapter describes the MDIO and MMD registers available to support the MxL86250C feature set. These registers are accessible by an external management entity (called STA in IEEE) to control, configure, or read the status of the MxL86250C. After power-on, the MxL86250C resets the MDIO and MMD registers to default values sufficient to operate without specific programing.

All the register definitions, behaviors, and fields are strictly compliant with IEEE 802.3. Refer to IEEE 802.3 [2] for more information about the registers. The only registers not referenced in IEEE 802.3 are two register groups that are vendor-specific: VSPEC1 and VSPEC2. These allow custom functions related to MxL86250C.

In the register descriptions, the section or table references refer to the IEEE 802.3 [2].

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

4.1 MDIO-specific Terminology

This list describes how the common IEEE 802.3 terms relate to MDIO and MMD register concepts discussed in this chapter.

- **STA**: Station Management. A host connected to the MDIO interface. STAs are generally Media Access Controllers (MACs). The STA drives the MDIO bus as a clock master and the MxL86250C is an MDIO slave.
- **Host**: Used as a synonym of STA in this document.
- **PHY**: Physical Layer. In the MxL86250C, this encompasses Analog Signal Processing, Digital Signal Processing, and Physical Coding Sublayer (PCS). The PHY contains several sublayers that are individually manageable entities known as MDIO manageable devices (MMDs).
- **MMD**: MDIO Manageable Device. The list of MMDs available in the MxL86250C is in Section 4.3.
- **Device**: In the context of the MDIO/MMD registers, a device is a register bank grouped by logical sublayers of the PHY layer.
- **Clause**: Refers to a particular section of the IEEE 802.3 standard [2]. In particular, Clause 22 describes MDIO device 0 and Clause 45 describes the other MMDs.
- **MII**: Media Independent Interface. This encompasses the MDIO and the (G)MII as described in Clause 22. STD registers in device 0 are also called MII registers.

4.2 Register Naming and Numbering

The register numbering convention in this document is similar to that of IEEE 802.3.

The numbering syntax uses three numbers, a.b.c, as specified in IEEE 802.3, paragraph 45.1 [2], and the notation is generalized to Clause 22 registers in device 0 STD. The alphanumeric syntax also uses the same structure and uses the names of the MMD devices, registers, and register fields separated by underscores and dots.

4.2.1 Register Numbering

The syntax is as follows, with a, b, and c written as decimal numbers:

a.b.c = <DEVICE_NUMBER>.<REGISTER_NUMBER>.<FIELD_NUMBER>

When the last indicator (c) is omitted, the register numbering refers to the full register.

When a field is more than a single bit, the bit range is indicated using a colon (for example, 1:3 is the field of bits 1 to 3). In an MDIO register, the least significant bit is bit 0 and most significant bit is bit 15. All MDIO registers are 16-bit wide.

4.2.2 Register Naming

The syntax is as follows, with AA, BB, and CC written as alphanumeric strings:

AA_BB.CC = <DEVICE_NAME>_<REGISTER_NAME>.<FIELD_NAME>

When the last indicator (CC) is omitted, the register naming refers to the full register.

The fields named RES, RES1, and RES2 refer to reserved fields as per IEEE 802.3.

4.2.3 Examples

`STD_STAT.ANOK` is the name of the field 0.1.5, which indicates that auto-negotiation is complete.

`ANEG_CTRL.ANEG_RESTART` is the name of the field 7.0.9, which allows the STA to restart the Ethernet ANEG procedure.

`ANEG_PHYID1` is the complete 16-bit register number 7.2, for the PHY identifier 1 number.

`VSPEC1_LED1.BLINKS` is the 4-bit wide field number 30.2.15:12, which contains LED1 slow blinking configuration.

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

4.3 MMD Devices Present in MxL86250C

The MMD devices implement groups of standardized registers under the management of the STA.

Table 26 MDIO/MMD Devices Present in MxL86250C

MDIO/MMD Name	Device Number (decimal)	Description
STD	0	MDIO Standard Device as described in Clause 22. This also contains a number of MxL86250C-specific PHY registers.
PMAPMD	1	Control and status registers related to the PMA/PMD signal processing modules
PCS	3	Control and status registers related to the PCS encoding/decoding device
ANEG	7	Control and status registers related to the auto-negotiation device
VSPEC1	30	MxL86250C-specific LED control and other MxL86250C-specific control
VSPEC2	31	MxL86250C-specific WoL control

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

4.4 Responsibilities of the STA

The MxL86250C responds to all published register addresses for the device and returns a value of zero for undefined and unsupported registers.

In accordance with IEEE 802.3 guidelines, it is the responsibility of the STA entity to ensure that mutually acceptable speeds are applied consistently across all the MMDs of the MxL86250C.

The MxL86250C ignores writes to the PMA/PMD speed selection bits that select speeds not advertised in the PMA/PMD speed ability register. The PMA/PMD speed selection defaults to a supported ability.

API is provided to access the PHY MDIO and MMD registers, which cannot be accessed directly.

The product (or products) mentioned in this data sheet are Not Recommended for New Designs (NRND)

4.5 MDIO Access Protocols to Read / Write Registers

All the MDIO/MMD registers are accessible from an external chip connected to the MDIO bus on the MDIO_S and MDC_S pins. The MxL86250C supports several MDIO frame protocols:

- Clause 22: To access Device 0
- Clause 22 Extended: To access other devices using the indirection scheme specified by IEEE 802.3
  Dev 1: PMAPMD
  Dev 3: PCS
  Dev 7: ANEG
  Dev 30: VSPEC1
  Dev 31: VSPEC2
- Clause 45: to access all devices

Both Clause 22 Extended and Clause 45 are used to access MMD devices. However, the mechanism implemented in the MxL86250C provides faster speeds using Clause 45. It creates differences in latencies in the MDIO reply:

- The Clause 22 Extended protocol involves an indirect mechanism.
- The Clause 45 protocol provides faster replies.

The Clause 22 registers are accessed using the Clause 45 electrical interface and the Clause 22 management frame structure. Refer to IEEE 802.3 section 45 [2].

The product (or products) mentioned in this data sheet are Not Recommended for New Designs (NRND)

5 PHY MDIO Registers Detailed Description

Table 27 Register Access Type

Mode	Symbol
Read-Only Register (Status or Ability Register)	RO
Read-Write Register (MDIO Register)	RW
Read-Write Self-Clearing Register (bit cleared after read from MDIO)	RWSC
Read-Only Self-Clearing Register (bit cleared after read from MDIO)	ROSC
Read-Only Latching Low Register	ROLL
Read-Only Latching High Register	ROLH

The product (or products) mentioned in this data sheet are Not Recommended for New Designs (NRND)

5.1 Standard Management Registers

This section describes the IEEE 802.3 standard management registers corresponding to Clause 22.

Table 28 Registers Overview- Standard Management Registers

Register Short Name	Register Long Name	Reset Value
STD_CTRL	STD Control (Register 0.0)	3040_H
STD_STAT	Status Register (Register 0.1)	7949_H
STD_PHYID1	PHY Identifier 1 (Register 0.2)	$C133_H$
STD_PHYID2	PHY Identifier 2 (Register 0.3)	5400_H 1)
STD_AN_ADV	Auto-Negotiation Advertisement (Register 0.4)	$9DE1_H$
STD_AN_LPA	Auto-Negotiation Link Partner Ability (Register 0.5)	$1DE0_H$
STD_AN_EXP	Auto-Negotiation Expansion (Register 0.6)	0064_H
STD_AN_NPTX	Auto-Negotiation Next Page Transmit Register (Register 0.7)	2001_H
STD_AN_NPRX	Auto-Negotiation Link Partner Received Next Page Register (Register 0.8)	0000_H
STD_GCTRL	Gigabit Control Register (Register 0.9)	0200_H
STD_GSTAT	Gigabit Status Register (Register 0.10)	0000_H
STD_MMDCTRL	MMD Access Control Register (Register 0.13)	0000_H
STD_MMDDATA	MMD Access Data Register (Register 0.14)	0000_H
STD_XSTAT	Extended Status Register (Register 0.15)	2000_H

1) For the device specific reset value, see the Product and Package Naming table in the **Product Ordering Information** chapter.

Data sheet are Not Recommended for New Designs (NRND)
The Product (or products) mentioned in this

5.1.1 Standard Management Register Descriptions

This section describes all the STD registers in detail.

STD Control (Register 0.0)

This register controls the main functions of the PHY.

IEEE Standard Register=0.0

STD_CTRL **Reset Value**

STD Control (Register 0.0) **3040_H**

15	14	13	12	11	10	9	8	7	6	5 … 0
RST	**LB**	**SSL**	**ANEN**	**PD**	**ISOL**	**ANRS**	**DPLX**	**COL**	**SSM**	**RES**
rwsc	rw	rw	rw	rw	rw	rwsc	rw	rw	rw	ro

Field	Bits	Type	Description
RST	15	RWSC	**Reset** Resets the PHY to its default state. Active links are terminated. This is a self-clearing bit, which is set to zero by the hardware after a reset is performed. 0_B **NORMAL** Normal operational mode 1_B **RESET** Resets the device.
LB	14	RW	**Loopback on GMII** This mode enables looping back of MII data from the transmit to the receive direction. No data is transmitted to the Ethernet PHY. The device operates at the selected speed. The collision signal remains de-asserted unless otherwise forced by the collision test. 0_B **NORMAL** Normal operational mode 1_B **ENABLE** Closes the loopback from Tx to Rx at xMII.
SSL	13	RW	**Forced Speed Selection LSB** This bit only takes effect when bit ANEN is set to zero, which disables the auto-negotiation process. This is the lower bit (LSB) of the forced speed selection and is used in conjunction with the higher bit (MSB). The standard procedure to force 2500 Mbps operation (when ANEG is disabled) is to program PMA_CTRL with 1.0.6 = 1.0.13 = 1 and 1.0.5:2 = [0 1 1 0]. The GPHY mirrors 1.0.6, 1.0.13 and 0.0.6, 0.0.13. This is the MSB LSB bit value encoding: 00_B 10 Mbps 01_B 100 Mbps 10_B 1000 Mbps 11_B Reserved, defaults to 2500 Mbps operation when the PMA_CTRL register 1.0.5:2 equals [0 1 1 0].

data sheet are Not Recommended for New Designs (NRND)
The Product(or products) mentioned in this

Field	Bits	Type	Description (cont'd)
ANEN	12	RW	**Auto-Negotiation Enable** Allows enabling and disabling of the auto-negotiation process capability of the PHY. When enabled, the force bits for duplex mode (CTRL.DPLX) and the speed selection (CTRL.SSM, CTRL.SSL) become inactive; otherwise, the force bits define the PHY operation. 0_B **DISABLE** Disables the auto-negotiation protocol. 1_B **ENABLE** Enables the auto-negotiation protocol.
PD	11	RW	**Power Down** Forces the device into a power down state (SLEEP) in which power consumption is the bare minimum required to still maintain the MII management interface communication. When activating the power down functionality, the PHY terminates active data links. The MII interface is also stopped in power down mode. 0_B **NORMAL** Normal operational mode 1_B **POWERDOWN** Forces the device into power down mode.
ISOL	10	RW	**Isolate** The isolation mode isolates the PHY from the MAC. The MAC interface inputs are ignored, whereas the MAC interface outputs are set to tristate (high-impedance). 0_B **NORMAL** Normal operational mode 1_B **ISOLATE** Isolates the PHY from the MAC.
ANRS	9	RWSC	**Restart Auto-Negotiation** Restarts the auto-negotiation process on the MDI. This bit does not have any effect when auto-negotiation is disabled using CTRL.ANEN. This bit is self-clearing after the auto-negotiation process is initiated. 0_B **NORMAL** Stays in current mode. 1_B **RESTART** Restarts auto-negotiation.
DPLX	8	RW	**Forced Duplex Mode** This bit only takes effect when bit CTRL.ANEN is set to zero, which disables the auto-negotiation process. This bit controls the forced duplex mode. It allows forcing of the PHY into full-duplex or half-duplex mode. This bit does not take effect in loopback mode, when bit CTRL.LB is set to 1_B. It is only possible to force the duplex mode to half-duplex in 10BASE-T and 100BASE-TX speed modes. This field is ignored for higher speeds. 0_B **HD** Half-duplex 1_B **FD** Full-duplex
COL	7	RW	**Collision Test** Allows testing of the COL signal at the xMII interface. When the collision test is enabled, the state of the TX_EN signal is looped back to the COL signal within a minimum latency. 0_B **DISABLE** Normal operational mode 1_B **ENABLE** Activates the collision test.

data sheet are Not Recommended for New Designs (NRND)
The product(s) mentioned in this

Field	Bits	Type	Description (cont'd)
SSM	6	RW	**Forced Speed Selection MSB** This bit only takes effect when bit ANEN is set to zero, which disables the auto-negotiation process. This is the higher bit (MSB) of the forced speed selection and is used in conjunction with the lower bit (LSB). The preferred way to force 2500 Mbps operation (when ANEG is disabled) is to program PMA_CTRL with 1.0.6 = 1.0.13 = 1 and 1.0.5:2 = [0 1 1 0]. The GPHY mirrors 1.0.6, 1.0.13 and 0.0.6, 0.0.13. This is the MSB LSB bit value encoding: 00_B 10 Mbps 01_B 100 Mbps 10_B 1000 Mbps 11_B Reserved, defaults to 2500 Mbps operation when the PMA_CTRL register 1.0.5:2 equals [0 1 1 0].
RES	5:0	RO	**Reserved** Write as zero, ignore on read.

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

Status Register (Register 0.1)

This register contains status and capability information about the device. All the bits are read-only. A write access by the MAC does not have any effect. Refer to IEEE 802.3 22.2.4.2.

IEEE Standard Register=0.1

STD_STAT **Reset Value**

Status Register (Register 0.1) **7949_H**

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
CBT4	**CBTXF**	**CBTXH**	**XBTF**	**XBTH**	**CBT2F**	**CBT2H**	**EXT**	**RES**	**MFPS**	**ANOK**	**RF**	**ANAB**	**LS**	**JD**	**XCAP**
ro	ro	ro	ro	ro	ro	ro	ro	ro	ro	ro	rolh	ro	roll	rolh	ro

data sheet are Not Recommended for New Designs (NRND)
The product (or Products) mentioned in this

Field	Bits	Type	Description
CBT4	15	RO	**IEEE 100BASE-T4** Specifies the 100BASE-T4 ability. 0_B **DISABLED** PHY does not support this mode. 1_B **ENABLED** PHY supports this mode.
CBTXF	14	RO	**IEEE 100BASE-TX Full Duplex** Specifies the 100BASE-TX full duplex capability. 0_B **DISABLED** PHY does not support this mode. 1_B **ENABLED** PHY supports this mode.
CBTXH	13	RO	**IEEE 100BASE-TX Half-Duplex** Specifies the 100BASE-TX half-duplex capability. 0_B **DISABLED** PHY does not support this mode. 1_B **ENABLED** PHY supports this mode.
XBTF	12	RO	**IEEE 10BASE-T Full-Duplex** Specifies the 10BASE-T full-duplex capability. 0_B **DISABLED** PHY does not support this mode. 1_B **ENABLED** PHY supports this mode.
XBTH	11	RO	**IEEE 10BASE-T Half-Duplex** Specifies the 10BASE-T half-duplex capability. 0_B **DISABLED** PHY does not support this mode. 1_B **ENABLED** PHY supports this mode.
CBT2F	10	RO	**IEEE 100BASE-T2 Full-Duplex** Specifies the 100BASE-T2 full-duplex capability. 0_B **DISABLED** PHY does not support this mode. 1_B **ENABLED** PHY supports this mode.
CBT2H	9	RO	**IEEE 100BASE-T2 Half-Duplex** Specifies the 100BASE-T2 half-duplex capability. 0_B **DISABLED** PHY does not support this mode. 1_B **ENABLED** PHY supports this mode.

Field	Bits	Type	Description (cont'd)
EXT	8	RO	**Extended Status** The extended status registers are used to specify 1000 Mbps speed capabilities in the register XSTAT. 0_B **DISABLED** No extended status information available in register 15 1_B **ENABLED** Extended status information available in register 15
RES	7	RO	**Reserved** Ignore when read.
MFPS	6	RO	**Management Preamble Suppression** Specifies the Management Frame (MF) preamble suppression ability. 0_B **DISABLED** PHY requires management frames with preamble. 1_B **ENABLED** PHY accepts management frames without preamble.
ANOK	5	RO	**Auto-Negotiation Completed** Indicates whether the auto-negotiation process is completed or in progress. 0_B **RUNNING** Auto-negotiation process is in progress. 1_B **COMPLETED** Auto-negotiation process is completed.
RF	4	ROLH	**Remote Fault** Indicates the detection of a remote fault event. GPHY does not indicate RF. 0_B **INACTIVE** No remote fault condition detected 1_B **ACTIVE** Remote fault condition detected
ANAB	3	RO	**Auto-Negotiation Ability** Specifies the auto-negotiation ability. 0_B **DISABLED** PHY is not able to perform auto-negotiation. 1_B **ENABLED** PHY is able to perform auto-negotiation.
LS	2	ROLL	**Link Status** Indicates the link status of the PHY to the link partner. 0_B **INACTIVE** The link is down. No communication with link partner possible. 1_B **ACTIVE** The link is up. Data communication with link partner is possible.
JD	1	ROLH	**Jabber Detect** Indicates that a jabber event was detected. 0_B **NONE** No jabber condition detected 1_B **DETECTED** Jabber condition detected
XCAP	0	RO	**Extended Capability** Indicates the availability and support of extended capability registers. 0_B **DISABLED** Only base registers are supported. 1_B **ENABLED** Extended capability registers are supported.

data sheet are Not Recommended for New Designs (NRND)
The product (or product) mentioned in this


PHY Identifier 1 (Register 0.2)

This code specifies the Organizationally Unique Identifier (OUI), and the vendor's model and revision number.

IEEE Standard Register=0.2

STD_PHYID1 **Reset Value**

PHY Identifier 1 (Register 0.2) **$C133_H$**



Field	Bits	Type	Description
OUI	15:0	RO	**Organizationally Unique Identifier Bits 3:18**


data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

PHY Identifier 2 (Register 0.3)

IEEE Standard Register=0.3

STD_PHYID2 **Reset Value**

PHY Identifier 2 (Register 0.3) **5400_H**



Field	Bits	Type	Description
OUI	15:10	RO	**Organizationally Unique Identifier Bits 19:24**
LDN	9:4	RO	**Device Number** Specifies the device number[1)] to distinguish between several different products.
LDRN	3:0	RO	**Device Revision Number** Specifies the device revision number[1)] to distinguish between several versions of this device.

1) For the device specific reset value, see the Product and Package Naming table in the **Product Ordering Information** chapter.

data sheet are Not Recommended for New Designs (NRND)
The product(s) mentioned in this


Auto-Negotiation Advertisement (Register 0.4)

This register contains the advertised abilities of the PHY during auto-negotiation.

IEEE Standard Register=0.4

STD_AN_ADV **Reset Value**

Auto-Negotiation Advertisement (Register 0.4) **$9DE1_H$**



Data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

Field	Bits	Type	Description
NP	15	RW	**Next Page** The next page indication is encoded in bit AN_ADV.NP regardless of the selector field value or link code word encoding. The PHY always advertises NP when a 1000BASE-T mode is advertised during auto-negotiation. 0_B **INACTIVE** No next page to follow 1_B **ACTIVE** Additional next page(s) to follow
RES	14	RO	**Reserved** Write as zero, ignore on read.
RF	13	RW	**Remote Fault** This bit allows indication of a fault to the link partner. 0_B **NONE** No remote fault is indicated. 1_B **FAULT** A remote fault is indicated.
XNP	12	RW	**Extended Next Page** Indicates the GPHY supports transmission of extended next pages (XNP). 0_B **UNABLE** GPHY is XNP unable. 1_B **ABLE** GPHY is XNP able.
TAF	11:5	RW	**Technology Ability Field** This is an 8-bit wide field containing information indicating supported technologies. The GPHY supports half-duplex and full-duplex 10BASE-T and 100BASE-TX and also both symmetric and asymmetric PAUSE. 40_H **PS_ASYM** Advertises asymmetric pause 20_H **PS_SYM** Advertises symmetric pause 10_H **DBT4** Advertises 100BASE-T4 08_H **DBT_FDX** Advertises 100BASE-TX full-duplex 04_H **DBT_HDX** Advertises 100BASE-TX half-duplex 02_H **XBT_FDX** Advertises 10BASE-T full-duplex 01_H **XBT_HDX** Advertises 10BASE-T half-duplex

Field	Bits	Type	Description (cont'd)
SF	4:0	RW	**Selector Field** This field is a 5-bit wide field for encoding 32 possible messages. The encodings are defined in IEEE 802.3-2008 Annex 28A. Unspecified combinations are reserved for future use. Reserved combinations of this field are not to be transmitted. 00001_B**IEEE802DOT3** Selects the IEEE 802.3 technology.

The product (or products) mentioned in this data sheet are Not Recommended for New Designs (NRND)


Auto-Negotiation Link Partner Ability (Register 0.5)

IEEE Standard Register=0.5

When the auto-negotiation is complete, this register contains the advertised ability of the link partner. The bit definitions are a direct representation of the received link code word.

STD_AN_LPA **Reset Value**

Auto-Negotiation Link Partner Ability (Register 0.5) **$1DE0_H$**



Field	Bits	Type	Description
NP	15	RO	**Next Page** Next page request indication from the link partner. 0_B **INACTIVE** No next page to follow 1_B **ACTIVE** Additional next pages to follow
ACK	14	RO	**Acknowledge** Acknowledgment indication from the link partner's link code word. 0_B **INACTIVE** The device did not receive its link partner's link code word. 1_B **ACTIVE** The device received its link partner's link code word.
RF	13	RO	**Remote Fault** Remote fault indication from the link partner. 0_B **NONE** Remote fault is not indicated by the link partner. 1_B **FAULT** Remote fault is indicated by the link partner.
XNP	12	RW	**Extended Next Page** Indicates the GPHY supports transmission of extended next pages (XNP). 0_B **UNABLE** Link partner is XNP unable. 1_B **ABLE** Link partner is XNP able.
TAF	11:5	RW	**Technology Ability Field** 40_H **PS_ASYM** Advertises asymmetric pause 20_H **PS_SYM** Advertises symmetric pause 10_H **DBT4** Advertises 100BASE-T4 08_H **DBT_FDX** Advertises 100BASE-TX full-duplex 04_H **DBT_HDX** Advertises 100BASE-TX half-duplex 02_H **XBT_FDX** Advertises 10BASE-T full-duplex 01_H **XBT_HDX** Advertises 10BASE-T half-duplex
SF	4:0	RO	**Selector Field** 00001_B**IEEE802DOT3** Selects the IEEE 802.3 technology

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

Auto-Negotiation Expansion (Register 0.6)


This is the auto-negotiation expansion register indicating the status of the link partner's auto-negotiation. This register is valid only after the auto-negotiation is completed.

Refer to IEEE 802.3 28.2.4.1.5.

IEEE Standard Register=0.6

STD_AN_EXP **Reset Value**

Auto-Negotiation Expansion (Register 0.6) **0064_H**

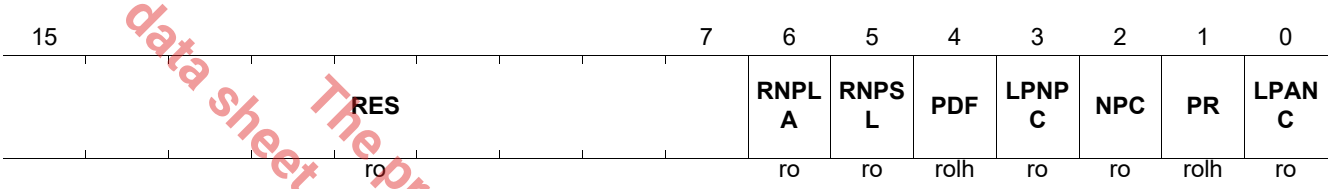

Field	Bits	Type	Description
RES	15:7	RO	**Reserved** Write as zero, ignore on read.
RNPLA	6	RO	**Receive Next Page Location Able** According to 802.3-2015, indicates the Rx NP location is indicated by field RNPSL. 0_B **UNABLE** Received Next Page Storage Location is not specified by bit (6.5). 1_B **ABLE** Received Next Page Storage Location is specified by bit (6.5).
RNPSL	5	RO	**Receive Next Page Storage Location** According to 802.3-2015, indicates the Rx NP is in register 0.8 for the GPHY. 0_B **FIVE** Link partner next pages are stored in register 5. 1_B **EIGHT** Link partner next pages are stored in register 8.
PDF	4	ROLH	**Parallel Detection Fault** 0_B **NONE** A fault was not detected via the parallel detection function. 1_B **FAULT** A fault was detected via the parallel detection function.
LPNPC	3	RO	**Link Partner Next Page Capable** 0_B **UNABLE** Link partner is unable to exchange next pages. 1_B **CAPABLE** Link partner is capable of exchanging next pages.
NPC	2	RO	**Next Page Capable** 0_B **UNABLE** GPHY is unable to exchange next pages. 1_B **CAPABLE** GPHY is capable of exchanging next pages.
PR	1	ROLH	**Page Received** 0_B **NONE** A new page was not received. 1_B **RECEIVED** A new page was received.
LPANC	0	RO	**Link Partner Auto-Negotiation Capable** 0_B **UNABLE** Link partner is unable to auto-negotiate. 1_B **CAPABLE** Link partner is auto-negotiation capable.

data sheet are Not Recommended for New Designs (NRND)
The product(s) mentioned in this


Auto-Negotiation Next Page Transmit Register (Register 0.7)

The auto-negotiation next page transmit register contains the next page link code word to be transmitted when next page ability is supported. Refer to IEEE 802.3 28.2.4.1.6.

IEEE Standard Register=0.7

STD_AN_NPTX **Reset Value**

Auto-Negotiation Next Page Transmit Register (Register 0.7) **2001_H**



Field	Bits	Type	Description
NP	15	RW	**Next Page** 0_B **INACTIVE** Last page 1_B **ACTIVE** Additional next page(s) to follow
RES	14	RO	**Reserved** Write as zeros, ignore on read.
MP	13	RW	**Message Page** Indicates the content of MCF is either an unformatted page or a formatted message. 0_B **UNFOR** Unformatted page 1_B **MESSG** Message page
ACK2	12	RW	**Acknowledge 2. GPHY Does Not Comply** 0_B **INACTIVE** Device is not able to comply with message. 1_B **ACTIVE** Device complies with message.
TOGG	11	RO	**Toggle** This bit always takes the opposite value of the Toggle bit in the previously exchanged link code word. 0_B **ZERO** Previous value of the transmitted link code word was 1_B. 1_B **ONE** Previous value of the transmitted link code word was 0_B.

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

Field	Bits	Type	Description (cont'd)
MCF	10:0	RW	**Message or Unformatted Code Field** When the Message Page bit is set to 1_B (0.7.13), this field is the Message Code Field of a message page used in next page exchange. The message codes are described in IEEE 802.3 Appendix 28C. It is used to indicate the type of message in UCF1 and UCF2. 00_H Reserved 01_H Null message 02_H One Unformatted Page (UP) with TAF follows 03_H Two UPs with TAF follows 04_H Remote fault details message 05_H OUI message 06_H PHY ID message 07_H 100BASE-T2 message 08_H 1000BASE-T message 09_H MULTIGBASE-T message $0A_H$ EEE technology capability follows in next UP $0B_H$ OUI XNP

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this


Auto-Negotiation Link Partner Received Next Page Register (Register 0.8)

This register contains the next page link code word received from the link partner. Refer to IEEE 802.3-2008 28.2.4.1.7.

IEEE Standard Register=0.8

STD_AN_NPRX
Auto-Negotiation Link Partner Received Next Page Register (Register 0.8)

Reset Value
0000_H

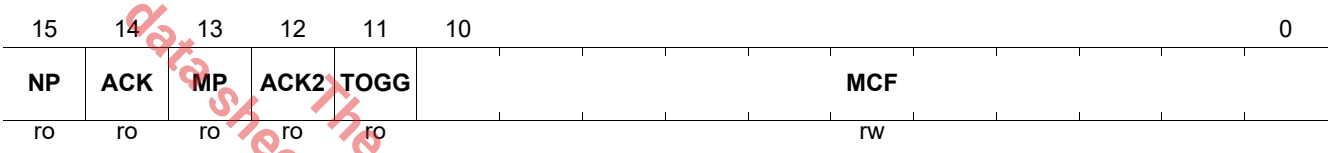

Field	Bits	Type	Description
NP	15	RO	**Next Page** 0_B **INACTIVE** No next pages to follow 1_B **ACTIVE** Additional next page(s) to follow
ACK	14	RO	**Acknowledge** 0_B **INACTIVE** The device did not receive its link partner's link code word. 1_B **ACTIVE** The device received its link partner's link code word.
MP	13	RO	**Message Page** Indicates the content of MCF is either an unformatted page or a formatted message. 0_B **UNFOR** Unformatted page 1_B **MESSG** Message page
ACK2	12	RO	**Acknowledge 2** 0_B **INACTIVE** Device is not able to comply with the message. 1_B **ACTIVE** Device complies with the message.
TOGG	11	RO	**Toggle** This bit always takes the opposite value of the Toggle bit in the previously exchanged link code word. 0_B **ZERO** Previous value of the transmitted link code word was 1_B. 1_B **ONE** Previous value of the transmitted link code word was 0_B.

datasheet are not Recommended for New Designs (NRND)
The product (or products) mentioned in this

Field	Bits	Type	Description (cont'd)
MCF	10:0	RW	**Message or Unformatted Code Field** This field is the Message Code Field of a message page used in next page exchange. The message codes are described in IEEE 802.3 Appendix 28C. It is used to indicate the type of message in UCF1 and UCF2. 00_H Reserved 01_H Null message 02_H One Unformatted Page (UP) with TAF follows 03_H Two UPs with TAF follows 04_H Remote fault details message 05_H OUI message 06_H PHY ID message 07_H 100BASE-T2 message 08_H 1000BASE-T message 09_H MULTIGBASE-T message $0A_H$ EEE technology capability follows in next UP $0B_H$ OUI XNP

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this


Gigabit Control Register (Register 0.9)

This is the control register to configure the Gigabit Ethernet behavior of the PHY. Refer to IEEE 802.3-2008 40.5.1.1.

IEEE Standard Register=0.9

STD_GCTRL **Reset Value**

Gigabit Control Register (Register 0.9) **0200_H**

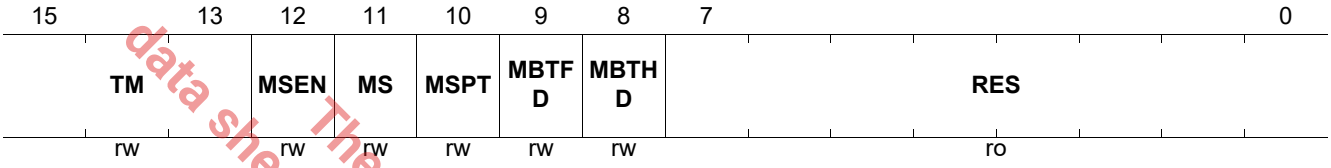

data sheet are Not Recommended for New Designs (NRND)
The product(or Products) mentioned in this

Field	Bits	Type	Description
TM	15:13	RW	**Transmitter Test Mode** This register field allows enabling of the standard transmitter test modes. 000_B **NOP** Normal operation 001_B **WAV** Test mode 1 transmit waveform test 010_B **JITM** Test mode 2 transmit jitter test in master mode 011_B **JITS** Test mode 3 transmit jitter test in slave mode 100_B **DIST** Test mode 4 transmitter distortion test
MSEN	12	RW	**Master/Slave Manual Configuration Enable** 0_B **DISABLED** Disables master/slave manual configuration value. 1_B **ENABLED** Enables master/slave manual configuration value.
MS	11	RW	**Master/Slave Configuration Value** Allows forcing of master or slave mode manually when AN_GCTRL.MSEN is set to 1_B. 0_B **SLAVE** Configures PHY as slave during master/slave negotiation. 1_B **MASTER** Configures PHY as master during master/slave negotiation.
MSPT	10	RW	**Master/Slave Port Type** Defines whether the PHY advertises itself as a multi- or single-port device, which in turn impacts the master/slave resolution function. 0_B **SPD** Single-port device 1_B **MPD** Multi-port device
MBTFD	9	RW	**1000BASE-T Full-Duplex** Advertises the 1000BASE-T full-duplex capability; always forced to 1 in converter mode. 0_B **DISABLED** Advertises PHY as not 1000BASE-T full-duplex capable 1_B **ENABLED** Advertises PHY as 1000BASE-T full-duplex capable

Field	Bits	Type	Description (cont'd)
MBTHD	8	RW	**1000BASE-T Half-Duplex** Always advertises the 1000BASE-T half-duplex capability as disabled. The GPHY does not support 1000BASE-T half-duplex capability. 0_B **DISABLED** Advertises PHY as not 1000BASE-T half-duplex capable 1_B **ENABLED** Advertises PHY as 1000BASE-T half-duplex capable
RES	7:0	RO	**Reserved** Write as zero, ignore on read.

The product (or products) mentioned in this data sheet are Not Recommended for New Designs (NRND)


Gigabit Status Register (Register 0.10)

This is the status register used to reflect the Gigabit Ethernet status of the PHY. Refer to IEEE 802.3-2022 40.5.1.1.

IEEE Standard Register=0.10

STD_GSTAT **Reset Value**

Gigabit Status Register (Register 0.10) **0000_H**

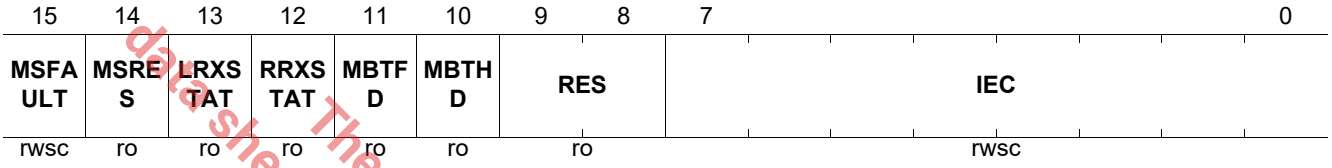

Field	Bits	Type	Description
MSFAULT	15	RWSC	**Master/Slave Manual Configuration Fault** This bit is set when the number of failed master-slave resolutions reaches 7. It is cleared upon each read of GSTAT. This bit self clears on auto-negotiation enable or auto-negotiation complete. 0_B **OK** Master/slave manual configuration resolved successfully 1_B **NOK** Master/slave manual configuration resolved with a fault
MSRES	14	RO	**Master/Slave Configuration Resolution** 0_B **SLAVE** Local PHY configuration resolved to SLAVE 1_B **MASTER** Local PHY configuration resolved to MASTER
LRXSTAT	13	RO	**Local Receiver Status** Indicates the status of the local receiver. 0_B **NOK** Local receiver not OK 1_B **OK** Local receiver OK
RRXSTAT	12	RO	**Remote Receiver Status** Indicates the status of the remote receiver. 0_B **NOK** Remote receiver not OK 1_B **OK** Remote receiver OK
MBTFD	11	RO	**Link Partner Capable of Operating 1000BASE-T Full-Duplex** 0_B **DISABLED** Link partner is not capable of operating 1000BASE-T full-duplex 1_B **ENABLED** Link partner is capable of operating 1000BASE-T full-duplex
MBTHD	10	RO	**Link Partner Capable of Operating 1000BASE-T Half-Duplex** 0_B **DISABLED** Link partner is not capable of operating 1000BASE-T half-duplex 1_B **ENABLED** Link partner is capable of operating 1000BASE-T half-duplex
RES	9:8	RO	**Reserved** Write as zero, ignore on read.

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

Field	Bits	Type	Description (cont'd)
IEC	7:0	RWSC	**Idle Error Count** Indicates the idle error count. This field contains a cumulative count of the errors detected when the receiver receives idles.

The product (or products) mentioned in this data sheet are Not Recommended for New Designs (NRND)


MMD Access Control Register (Register 0.13)

The MMD access control register is used in conjunction with the MMDDATA register to access the MMD register space. This uses address directing as specified in IEEE 802.3 Clause 22 Extended.

IEEE Standard Register=0.13

STD_MMDCTRL **Reset Value**

MMD Access Control Register (Register 0.13) **0000_H**



Field	Bits	Type	Description
ACTYPE	15:14	RW	**Access Type Function** When the MMDDATA register is accessed via an address access (ACTYPE=0), the access is directed to the address register within the MMD associated with the value in the DEVAD field. Otherwise, both the DEVAD field and the MMD address register direct the MMDDATA register data accesses to the appropriate registers within that MMD. 00_B **ADDRESS** Accesses to the MMDDATA register access the MMD individual address register. 01_B **DATA** Accesses to the MMDDATA register access the register within the MMD selected. 10_B **DATA_PI** Accesses to the MMDDATA register access the register within the MMD selected. 11_B **DATA_PIWR** Accesses to the MMDDATA register access the register within the MMD selected.
RESH	13:8	RO	**Reserved** Write as zero, ignored on read.
RESL	7:5	RO	**Reserved** Write as zero, ignored on read.
DEVAD	4:0	RW	**Device Address** The DEVAD field directs any accesses of register MMDDATA to the appropriate MMD as described in IEEE 802.3-2008 Clause 45.2.

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this


MMD Access Data Register (Register 0.14)

The MMD access data register is used in conjunction with the MMD access control (MMDCTRL) register to access the MMD register space. For more information on MMD access, refer to IEEE 802.3-2008 Clause 22.2.4.3.12, Clause 45.2, and Annex 22D.

IEEE Standard Register=0.14

STD_MMDDATA **Reset Value**

MMD Access Data Register (Register 0.14) **0000_H**

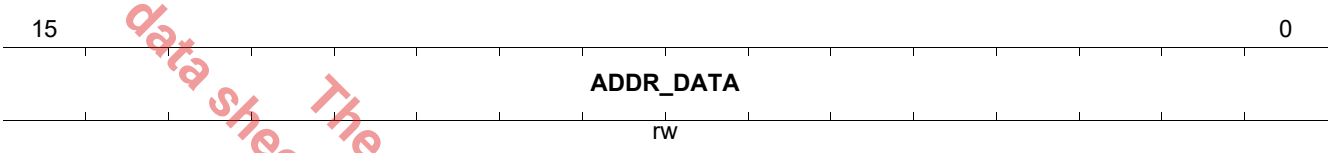

Field	Bits	Type	Description
ADDR_DATA	15:0	RW	**Address or Data Register** This register accesses either a specific MMD address register or the data content of the MMD register to which this address register points. The MMDCTRL register defines which function is currently valid.

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this


Extended Status Register (Register 0.15)

This register contains extended status and capability information about the PHY. All the bits are read-only. A write access does not have any effect.

IEEE Standard Register=0.15

STD_XSTAT **Reset Value**

Extended Status Register (Register 0.15) **2000_H**

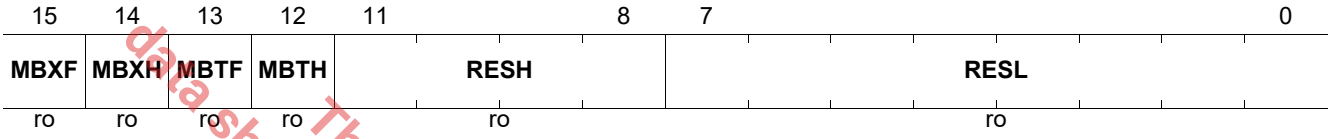

Field	Bits	Type	Description
MBXF	15	RO	**1000BASE-X Full-Duplex Capability** Specifies whether the PHY is capable of operating 1000BASE-X full-duplex. 0_B **DISABLED** PHY does not support this mode. 1_B **ENABLED** PHY supports this mode.
MBXH	14	RO	**1000BASE-X Half-Duplex Capability** Specifies whether the PHY is capable of operating 1000BASE-X half-duplex. 0_B **DISABLED** PHY does not support this mode. 1_B **ENABLED** PHY supports this mode.
MBTF	13	RO	**1000BASE-T Full-Duplex Capability** Specifies whether the PHY is capable of operating 1000BASE-T full-duplex. 0_B **DISABLED** PHY does not support this mode. 1_B **ENABLED** PHY supports this mode.
MBTH	12	RO	**1000BASE-T Half-Duplex Capability** GPHY do not support 1000BASE-T half-duplex capability. 0_B **DISABLED** PHY does not support this mode. 1_B **ENABLED** PHY supports this mode.
RESH	11:8	RO	**Reserved** Ignore when read.
RESL	7:0	RO	**Reserved** Ignore when read.

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

5.2 PHY-specific Management Registers

This section describes the PHY-specific management registers in device 0.

Table 29 Registers Overview- PHY-specific Management Registers

Register Short Name	Register Long Name	Reset Value
PHY_STAT1	Physical Layer Status 1 (Register 0.17)	$000C_H$
PHY_CTL1	Physical Layer Control 1 (Register 0.19)	0001_H
PHY_CTL2	Physical Layer Control 2 (Register 0.20)	0006_H
PHY_ERRCNT	Error Counter (Register 0.21)	0000_H
PHY_MIISTAT	Media-Independent Interface Status (Register 0.24)	0000_H
PHY_IMASK	Interrupt Mask Register (Register 0.25)	0000_H
PHY_ISTAT	Interrupt Status Register (Register 0.26)	0000_H
PHY_LED	LED Control Register (Register 0.27)	$FF00_H$
PHY_TPGCTRL	Test-Packet Generator Control (Register 0.28)	0000_H
PHY_TPGDATA	Test-Packet Generator Data (Register 0.29)	$00AA_H$
PHY_FWV	Firmware Version Register (Register 0.30)	0000_H

Data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

5.2.1 PHY-specific Management Register Descriptions

This section describes all the PHY registers in detail.


Physical Layer Status 1 (Register 0.17)

This register reports PHY link information, for example link-up, polarity reversals, and port mapping. The content of this register is only valid when the link is up.

IEEE Standard Register=0.17

PHY_STAT1 **Reset Value**

Physical Layer Status 1 (Register 0.17) **$000C_H$**

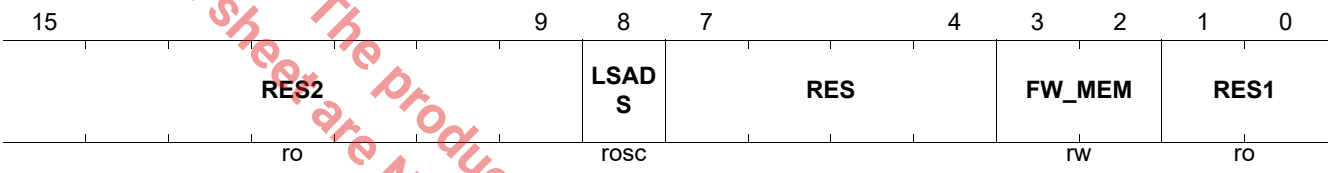

Field	Bits	Type	Description
RES2	15:9	RO	**Reserved** Write as zero, ignored on read.
LSADS	8	ROSC	**Link Speed Auto-Downspeed Status** Monitors the status of the Auto-Downspeed (ADS). 0_B **NORMAL** Did not perform any link speed ADS. 1_B **DETECTED** Detected an ADS.
FW_MEM	3:2	RW	**Firmware Memory Location** Indicates memory target used for firmware execution. 11_B **RAM** Firmware is executed from SRAM. Others: Reserved.
RES1	1:0	RO	**Reserved** Write as zero, ignored on read.

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this


Physical Layer Control 1 (Register 0.19)

This register controls the PHY functions.

IEEE Standard Register=0.19

PHY_CTL1 **Reset Value**

Physical Layer Control 1 (Register 0.19) **0001_H**

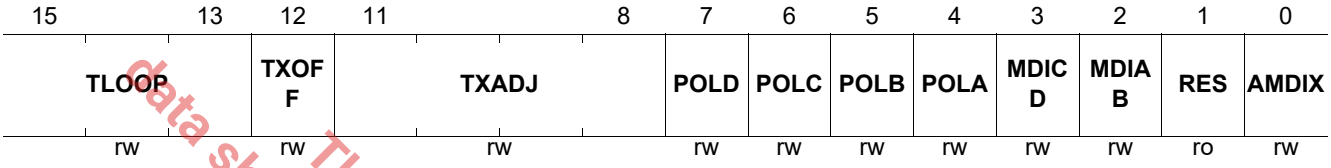

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

Field	Bits	Type	Description
TLOOP	15:13	RW	**Test Loop** Configures predefined test loops. 000_B **OFF** Test loops are switched off - normal operation. 001_B **NETL** Near-end test loop 010_B **FETL** Far-end test loop. 100_B **RJTL** RJ45 connector test loop. 101_B **FETLS** Standalone far-end test loop. No dependency on GMII_TX_CLK and GMII_RX_CLK. Others: Reserved.
TXOFF	12	RW	**Transmitter Off** This register bit turns the transmitter off. This feature is used for return loss measurements. 0_B **ON** Transmitter is on. 1_B **OFF** Transmitter is off.
TXADJ	11:8	RW	**Transmit Level Adjustment** Reserved.
POLD	7	RW	**Polarity Inversion Control on Port D** 0_B **NORMAL** Polarity normal 1_B **INVERTED** Polarity inversion
POLC	6	RW	**Polarity Inversion Control on Port C** 0_B **NORMAL** Polarity normal 1_B **INVERTED** Polarity inversion
POLB	5	RW	**Polarity Inversion Control on Port B** 0_B **NORMAL** Polarity normal 1_B **INVERTED** Polarity inversion
POLA	4	RW	**Polarity Inversion Control on Port A** 0_B **NORMAL** Polarity normal 1_B **INVERTED** Polarity inversion
MDICD	3	RW	**Mapping of MDI Ports C and D** Used when Auto-MDIX is OFF to force the MDIX cable crossover configuration. 0_B **MDI** Normal MDI mode 1_B **MDIX** Crossover MDI-X mode

Field	Bits	Type	Description (cont'd)
MDIAB	2	RW	**Mapping of MDI Ports A and B** Used when Auto-MDIX is OFF to force the MDIX cable crossover configuration. 0_B **MDI** Normal MDI mode 1_B **MDIX** Crossover MDI-X mode
RES	1	RO	**Reserved**
AMDIX	0	RW	**PHY Performs Auto-MDI/MDI-X or Uses Manual MDI/MDI-X** 0_B **MANUAL** PHY uses manual MDI/MDI-X. 1_B **AUTO** PHY performs Auto-MDI/MDI-X.

The product (or products) mentioned in this data sheet are Not Recommended for New Designs (NRND)


Physical Layer Control 2 (Register 0.20)

This register controls the PHY functions.

IEEE Standard Register=0.20

PHY_CTL2 **Reset Value**

Physical Layer Control 2 (Register 0.20) **0006_H**

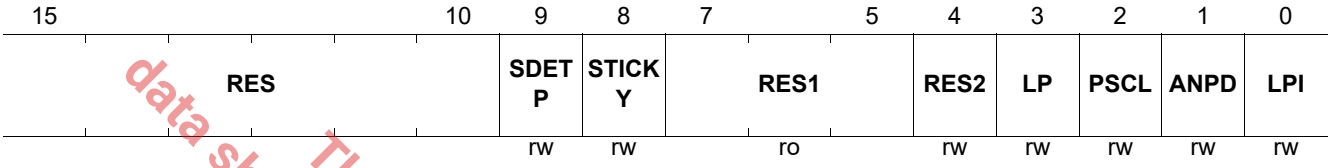

data sheet are Not Recommended for New Designs (NRND)
The product(s) mentioned in this

Field	Bits	Type	Description
SDETP	9	RW	**Signal Detection Polarity for the 1000BASE-X PHY** This field is reserved because 1000BASE-X is not supported on this PHY port.
STICKY	8	RW	**Sticky-Bit Handling** Setting this bit to 1_B ensures that all the vendor specific registers (of type RW) in the PHY (device 0), VSPEC1 (device 30), and VSPEC2 (device 31) are not changed during a MDIO reset or software reset of the GPHY. This allows the STA to keep the configurations chosen before reset. 0_B **OFF** Sticky-bit handling is disabled. 1_B **ON** Sticky-bit handling is enabled.
RES1	7:5	RO	**Reserved** Write as zero, ignored on read.
RES2	4	RW	**Reserved**
LP	3	RW	**Low Power Mode** Low Power Mode (LP) allows the GPHY to save energy by disabling most of the digital logic to reduce power consumption to its lowest level. The entry to LP is triggered when the PHY does not sense any energy on the cable and no link pulses (NLP, FLP, Beacons) are received. After spending VSPEC1_NBT_DS_CTRL.NRG_RST_CNT without energy in the ABILITY_DETECT state defined by IEEE 802.3 Clause 28, and after the timer defined VSPEC1_LOW_POWER_ENTRY_TIME.LPE_TIM expired, the PHY enters LP. 0_B **OFF** LP is disabled. The GPHY does not enter LP. 1_B **ON** LP is enabled. The GPHY enters LP when no energy is sensed.
PSCL	2	RW	**Power Consumption Scaling Depending on Link Quality** Allows enabling/disabling of the power consumption scaling depending on the link quality. 0_B **OFF** PSCL is disabled. 1_B **ON** PSCL is enabled.

Field	Bits	Type	Description (cont'd)
ANPD	1	RW	**Auto-Negotiation Power Down** Allows enabling/disabling of the power down modes during auto-negotiation looking for a link partner. 0_B **OFF** ANPD is disabled. 1_B **ON** ANPD is enabled.
LPI	0	RW	**Assert LPI via MDIO** Controls assertion/de-assertion of the LPI by the MDIO instead of following the (X)GMII LPI. Used to force the EEE on the TPI (ignoring the LPI indication from MAC). 0_B **DE-ASSERT** LPI is de-asserted on TPI. 1_B **ASSERT** LPI is asserted on TPI.

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this


Error Counter (Register 0.21)

This register controls the error counter. It allows the number of errors detected in the PHY to be counted for monitoring purposes.

IEEE Standard Register=0.21

PHY_ERRCNT **Reset Value**

Error Counter (Register 0.21) **0000_H**



Field	Bits	Type	Description
RES	15:12	RO	**Reserved** Write as zero, ignored on read.
SEL	11:8	RW	**Select Error Event** Configures which error type the error counter counts: 0000_B**RXERR** Receive errors are counted. 0001_B**RXACT** Receive frames are counted. 0010_B**ESDERR** ESD errors are counted. 0011_B**SSDERR** SSD errors are counted. 0100_B**TXERR** Transmit errors are counted. 0101_B**TXACT** Transmit frames events are counted. 0110_B**COL** Collision events are counted. 1000_B**NLD** Number of Link Down events are counted. 1001_B**NDS** Number of ADS events are counted. 1010_B**RES** Reserved 1011_B**RES** Reserved
COUNT	7:0	ROSC	**Counter Value** This counter value is updated each time the selected error event is detected. The counter value is reset every time a read operation on this register is performed or the error event is changed. The counter saturates at value FF_H.

data sheet are Not Recommended for New Designs (NRND)
The product (or product(s) mentioned in this


Media-Independent Interface Status (Register 0.24)

This register contains status information on the Ethernet link, concatenated in a single register to allow concise status read by the STA in a single register.

IEEE Standard Register=0.24

PHY_MIISTAT **Reset Value**

Media-Independent Interface Status (Register 0.24) **0000_H**

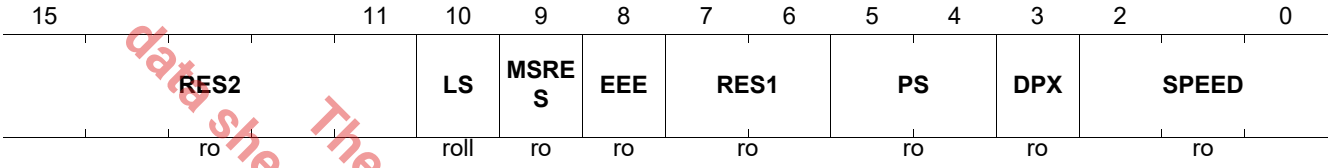

data sheet are Not Recommended for New Designs (NRND)
The product(s) for product(s) mentioned in this

Field	Bits	Type	Description
RES2	15:11	RO	**Reserved** Write as zero, ignored on read.
LS	10	ROLL	**Link Status of GPHY Ethernet PHY Operation** Indicates the link status of the PHY. 0_B **INACTIVE** The link is down. No communication with link partner possible. 1_B **ACTIVE** The link is up. Data communication with link partner is possible.
MSRES	9	RO	**Master/Slave Configuration** Indicates the master/slave configuration 0_B **SLAVE** Local PHY configuration is SLAVE after ANEG. 1_B **MASTER** Local PHY configuration is MASTER after ANEG.
EEE	8	RO	**Energy-Efficient Ethernet Mode** 0_B **OFF** EEE is disabled after ANEG resolution. 1_B **ON** EEE is enabled after ANEG resolution.
RES1	7:6	RO	**Reserved**
PS	5:4	RO	**Pause Status for Flow Control** 00_B **NONE** No PAUSE 01_B **TX** Transmit PAUSE 10_B **RX** Receive PAUSE 11_B **TXRX** Both transmit and receive PAUSE
DPX	3	RO	**GPHY Ethernet PHY Duplex Mode** 0_B **HDX** Half-duplex 1_B **FDX** Full-duplex
SPEED	2:0	RO	**GPHY Ethernet PHY Speed** 000_B **TEN** 10 Mbps 001_B **FAST** 100 Mbps 010_B **GIGA** 1000 Mbps 011_B **ANEG** Auto-negotiation mode 100_B **BZ2G5** 2.5 Gbps

Interrupt Mask Register (Register 0.25)

This register defines the mask for the Interrupt Status Register (ISTAT), which contains the event source for the MDINT interrupt sent from the GPHY to an external chip.

The information about the interrupt source is indicated in the ISTAT register.

IEEE Standard Register=0.25

PHY_IMASK **Reset Value**

Interrupt Mask Register (Register 0.25) **0000_H**

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
WOL	**MSRE**	**NPRX**	**NPTX**	**ANE**	**ANC**	**RES**	**RES**	**LP**	**TEMP**	**ADSC**	**MDIPC**	**MDIXC**	**DXMC**	**LSPC**	**LSTC**
rw	rw	rw	rw	rw	rw	rw	rw	rw	rw	rw	rw	rw	rw	rw	rw

data sheet are not Recommended for New Designs (NRND)
The product(s) mentioned in this

Field	Bits	Type	Description
WOL	15	RW	**Wake-on-LAN Event Mask** When active and masked in IMASK, the MDINT is activated upon detection of a valid WoL event. 0_B **INACTIVE** Interrupt is masked out. 1_B **ACTIVE** Interrupt is activated.
MSRE	14	RW	**Master/Slave Resolution Error Mask** When active, MDINT is activated upon detection of a master/slave resolution error (MSRE) during a 1000BASE-T ANEG. 0_B **INACTIVE** Interrupt is masked out. 1_B **ACTIVE** Interrupt is activated.
NPRX	13	RW	**Next Page Received Mask** When active, MDINT is activated upon reception of a next page in STD_AN_NPRX. 0_B **INACTIVE** Interrupt is masked out. 1_B **ACTIVE** Interrupt is activated.
NPTX	12	RW	**Next Page Transmitted Mask** When active, MDINT is activated upon transmission of the currently stored next page in STD_AN_NPTX. 0_B **INACTIVE** Interrupt is masked out. 1_B **ACTIVE** Interrupt is activated.
ANE	11	RW	**Auto-Negotiation Error Mask** When active, MDINT is activated upon detection of an ANEG error. 0_B **INACTIVE** Interrupt is masked out. 1_B **ACTIVE** Interrupt is activated.
ANC	10	RW	**Auto-Negotiation Complete Mask** When active, MDINT is activated upon completion of the ANEG process. 0_B **INACTIVE** Interrupt is masked out. 1_B **ACTIVE** Interrupt is activated.

Field	Bits	Type	Description (cont'd)
LP	7	RW	**LP Entry Indication Mask** 0_B **INACTIVE** Interrupt is masked out. The STA does not need to be informed of the event. 1_B **ACTIVE** Interrupt is activated. The STA receives MDINT when the PHY is about to enter LP.
TEMP	6	RW	**TEMP** 0_B **INACTIVE** Interrupt is masked out. The STA does not need to be informed of the event. 1_B **ACTIVE** Interrupt is activated. The interrupt is triggered when the temperature goes beyond the normal operating range.
ADSC	5	RW	**Link Speed Auto-Downspeed Detect Mask** When active, MDINT is activated upon detection of a link speed ADS event. 0_B **INACTIVE** Interrupt is masked out. 1_B **ACTIVE** Interrupt is activated.
MDIPC	4	RW	**MDI Polarity Change Detect Mask** When active, MDINT is activated upon detection of an MDI polarity change event. 0_B **INACTIVE** Interrupt is masked out. 1_B **ACTIVE** Interrupt is activated.
MDIXC	3	RW	**MDIX Change Detect Mask** When active, MDINT is activated upon detection of an MDI/MDIX cross-over change event. 0_B **INACTIVE** Interrupt is masked out. 1_B **ACTIVE** Interrupt is activated.
DXMC	2	RW	**Duplex Mode Change Mask** When active, MDINT is activated upon detection of full or half-duplex change. 0_B **INACTIVE** Interrupt is masked out. 1_B **ACTIVE** Interrupt is activated.
LSPC	1	RW	**Link Speed Change Mask** When active, MDINT is activated upon detection of link speed change. 0_B **INACTIVE** Interrupt is masked out. 1_B **ACTIVE** Interrupt is activated.
LSTC	0	RW	**Link State Change Mask** When active, MDINT is activated upon detection of link status change. 0_B **INACTIVE** Interrupt is masked out. 1_B **ACTIVE** Interrupt is activated.

data sheet are Not Recommended for New Designs (NRND)
The product(or products) mentioned in this

Interrupt Status Register (Register 0.26)

This register defines the event source for the MDINT interrupt sent from the GPHY to an external chip.

PHY_ISTAT is a cleared on read by the STA.

IEEE Standard Register=0.26

PHY_ISTAT **Reset Value**

Interrupt Status Register (Register 0.26) **0000_H**

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
WOL	**MSRE**	**NPRX**	**NPTX**	**ANE**	**ANC**	**RES**	**RES**	**LP**	**TEMP**	**ADSC**	**MDIPC**	**MDIXC**	**DXMC**	**LSPC**	**LSTC**
rosc	rosc	rosc	rosc	rosc	rosc	rosc	rosc	rosc	rosc	rosc	rosc	rosc	rosc	rosc	rosc

Field	Bits	Type	Description
WOL	15	ROSC	**Wake-on-LAN Interrupt Status** When this bit is set, the MDINT is activated upon detection of a valid WoL event. 0_B **INACTIVE** This event is not the interrupt source. 1_B **ACTIVE** The WoL event is the source of the interrupt.
MSRE	14	ROSC	**Master/Slave Resolution Error Interrupt Status** When this bit is set, the MDINT is activated upon detection of a MSRE during a 1000BASE-T ANEG. 0_B **INACTIVE** This event is not the interrupt source. 1_B **ACTIVE** The MSRE event is the source of the interrupt.
NPRX	13	ROSC	**Next Page Received Interrupt Status** When this bit is set, the MDINT is activated upon reception of a next page in STD_AN_NPRX. 0_B **INACTIVE** This event is not the interrupt source. 1_B **ACTIVE** The NPRX event is the source of the interrupt.
NPTX	12	ROSC	**Next Page Transmitted Interrupt Status** When this bit is set, the MDINT is activated upon transmission of the currently stored next page in STD_AN_NPTX. 0_B **INACTIVE** This event is not the interrupt source. 1_B **ACTIVE** The NPTX event is the source of the interrupt.
ANE	11	ROSC	**Auto-Negotiation Error Interrupt Status** When this bit is set, the MDINT is activated upon detection of an ANEG error. 0_B **INACTIVE** This event is not the interrupt source. 1_B **ACTIVE** The ANEG error event is the source of the interrupt.
ANC	10	ROSC	**Auto-Negotiation Complete Interrupt Status** When this bit is set, the MDINT is activated upon completion of the ANEG process. 0_B **INACTIVE** This event is not the interrupt source. 1_B **ACTIVE** The ANEG complete event is the source of the interrupt.

data sheet are not recommended for New Designs (NRND)
The product (or products) mentioned in this

Field	Bits	Type	Description (cont'd)
LP	7	ROSC	**LP Entry Indication** 0_B **INACTIVE** No indication of LP entry 1_B **ACTIVE** Indication of LP entry.
TEMP	6	ROSC	**TEMP** Indicates that thermal mitigation action must be taken when the temperature goes beyond the normal operating range. The GPHY implements ADS by default when this happens, but it is possible to disable ADS. When the SoC disables ADS, it is recommended that the SoC initiates a link down and changes the speed capability to cool the device back to the normal temperature range. When the temperature reaches the maximum absolute rating, the device resets for safety purposes. Thermal mitigation must ensure that the maximum absolute temperature limits are never reached. 0_B **INACTIVE** This event is not the interrupt source. 1_B **ACTIVE** The TEMP change event is the source of the interrupt.
ADSC	5	ROSC	**Link Speed Auto-Downspeed Detect Interrupt Status** When this bit is set, the MDINT is activated upon detection of a link speed ADS event. 0_B **INACTIVE** This event is not the interrupt source. 1_B **ACTIVE** The ADSC change event is the source of the interrupt.
MDIPC	4	ROSC	**MDI Polarity Change Detect Interrupt Status** When this bit is set, the MDINT is activated upon detection of an MDI polarity change event. 0_B **INACTIVE** This event is not the interrupt source. 1_B **ACTIVE** The MDIPC change event is the source of the interrupt.
MDIXC	3	ROSC	**MDIX Change Detect Interrupt Status** When this bit is set, the MDINT is activated upon detection of an MDI/MDIX cross-over change event. 0_B **INACTIVE** This event is not the interrupt source. 1_B **ACTIVE** The MDIX change event is the source of the interrupt.
DXMC	2	ROSC	**Duplex Mode Change Interrupt Status** When this bit is set, the MDINT is activated upon detection of a full or half-duplex change. 0_B **INACTIVE** This event is not the interrupt source. 1_B **ACTIVE** The DXMC change event is the source of the interrupt.
LSPC	1	ROSC	**Link Speed Change Interrupt Status** When this bit is set, the MDINT is activated upon detection of link speed change. 0_B **INACTIVE** This event is not the interrupt source. 1_B **ACTIVE** The LSPC change event is the source of the interrupt.
LSTC	0	ROSC	**Link State Change Interrupt Status** When this bit is set, the MDINT is activated upon detection of link status change. 0_B **INACTIVE** This event is not the interrupt source. 1_B **ACTIVE** The LSTC change event is the source of the interrupt.

data sheet are Not Recommended for New Designs (NRND)
The product(s) mentioned in this

LED Control Register (Register 0.27)

This register contains the control bits for direct access to the LEDs by setting the on/off LEDxDA bits (where x is from 0 to 2).

To directly control the LED, the integrated LED functions must be disabled by the LEDxEN bit in this register.

The integrated LED functions are specified in the more sophisticated LED control registers in the MMD device VSPEC1.

IEEE Standard Register=0.27

PHY_LED **Reset Value**

LED Control Register (Register 0.27) **$FF00_H$**

15	12	11	10	9	8	7	4	3	2	1	0
RES		RES	LED2EN	LED1EN	LED0EN	RES1		RES	LED2DA	LED1DA	LED0DA
rw		rw	rw	rw	rw	ro		rw	rw	rw	rw

Field	Bits	Type	Description
RES	15:12	RW	**Reserved** The default value must not be changed.
LED2EN	10	RW	**Enable Integrated Function of LED2** Write a 0 to this bit to disable the pre-configured integrated function for this LED. The LED remains off unless directly accessed via LED2DA. 0_B **DISABLE** Disables the integrated LED function. 1_B **ENABLE** Enables the integrated LED function.
LED1EN	9	RW	**Enable Integrated Function of LED1** Write a 0 to this bit to disable the pre-configured integrated function for this LED. The LED remains off unless directly accessed via LED1DA. 0_B **DISABLE** Disables the integrated LED function. 1_B **ENABLE** Enables the integrated LED function.
LED0EN	8	RW	**Enable Integrated Function of LED0** Write a 0 to this bit to disable the pre-configured integrated function for this LED. The LED remains off unless directly accessed via LED0DA. 0_B **DISABLE** Disables the integrated LED function. 1_B **ENABLE** Enables the integrated LED function.
RES1	7:4	RO	**Reserved** Write as zero, ignored on read.
LED2DA	2	RW	**Direct Access to LED2** Write a 1 to this bit to illuminate the LED. LED2EN must be set to zero. 0_B **OFF** Switch off the LED. 1_B **ON** Switch on the LED.
LED1DA	1	RW	**Direct Access to LED1** Write a 1 to this bit to illuminate the LED. LED1EN must be set to zero. 0_B **OFF** Switch off the LED. 1_B **ON** Switch on the LED.

data sheet are Not Recommended for New Designs (NRND)
The Product (or products) mentioned in this

Field	Bits	Type	Description (cont'd)
LED0DA	0	RW	**Direct Access to LED0** Write a 1 to this bit to illuminate the LED. LED0EN must be set to zero. 0_B **OFF** Switch off the LED. 1_B **ON** Switch on the LED.

The product (or products) mentioned in this data sheet are Not Recommended for New Designs (NRND)


Test-Packet Generator Control (Register 0.28)

This register controls the operation of the integrated Test-Packet Generator (TPG). This module is only used for testing purposes.

IEEE Standard Register=0.28

PHY_TPGCTRL **Reset Value**

Test-Packet Generator Control (Register 0.28) **0000_H**

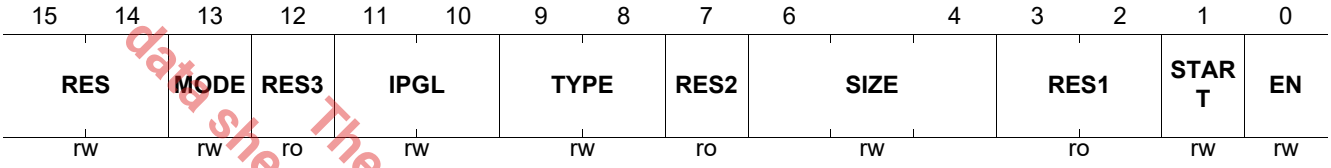

Field	Bits	Type	Description
RES	15:14	RW	**Reserved** Write as zero, ignore on read.
MODE	13	RW	**TPG Mode** Configures the packet generation mode. 0_B **CONTINUOUS** Sends packets continuously. 1_B **SINGLE** Sends a single packet.
RES3	12	RO	**Reserved** Write as zero, ignore on read.
IPGL	11:10	RW	**Inter-Packet Gap Length** Configures the length of the inter-packet gap in bit times. 00_B **RES** Reserved 01_B **BT96** Length is 96 bit times 10_B **BT960** Length is 960 bit times 11_B **BT9600** Length is 9600 bit times
TYPE	9:8	RW	**Packet Data Type** Configures the packet data type to be either predefined, byte increment, or random. When predefined, the content of the register TPGDATA is used. 00_B **RANDOM** Uses random data as the packet content. 01_B **BYTEINC** Uses byte increment as the packet content. 10_B **PREDEF** Uses predefined content of the register TPGDATA. 11_B **RES** Reserved.
RES2	7	RO	**Reserved.** Write as zero, ignore on read.

data sheet are Not Recommended for New Designs (NRND)
The product(or products) mentioned in this

Field	Bits	Type	Description (cont'd)
SIZE	6:4	RW	**Packet Size** Configures the size of the generated Ethernet packets in bytes. The size includes DA, SA, length/type, payload, and FCS. 000_B **B64** Packet length is 64 bytes 001_B **B2048** Packet length is 2048 bytes 010_B **B256** Packet length is 256 bytes 011_B **B4096** Packet length is 4096 bytes 100_B **B1024** Packet length is 1024 bytes 101_B **B1518** Packet length is 1518 bytes 110_B **B9000** Packet length is 9000 bytes
RES1	3:2	RO	**Reserved** Write as zero, ignore on read.
START	1	RW	**Start or Stop TPG Data Generation.** Starts the TPG data generation. Depending on the MODE, the TPG sends only one packet or chunks of 10000 packets until stopped. 0_B **STOP** Stops the TPG data generation. 1_B **START** Starts the TPG data generation.
EN	0	RW	**Enable the TPG** Enables the TPG for data generation. 0_B **DISABLE** Disables the TPG 1_B **ENABLE** Enables the TPG

datasheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this


Test-Packet Generator Data (Register 0.29)

Specifies the payload data to be used when sending a non-random data packet. All payload data bytes are sent with this value.

IEEE Standard Register=0.29

PHY_TPGDATA **Reset Value**

Test-Packet Generator Data (Register 0.29) **$00AA_H$**

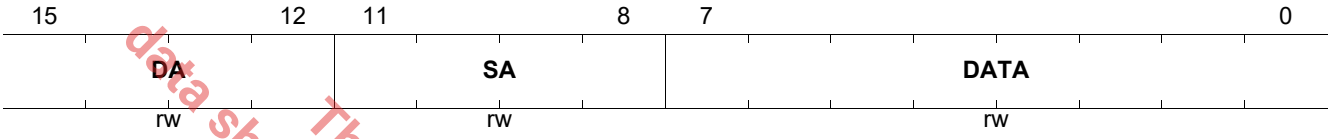

Field	Bits	Type	Description
DA	15:12	RW	**Destination Address** Configures the destination address nibble. The destination address builds up to 00-03-19-FF-FF-F[DA].
SA	11:8	RW	**Source Address** Configures the source address nibble. The source address builds up to 00-03-19-FF-FF-F[SA].
DATA	7:0	RW	**Data Byte to be Transmitted** This is the content of the payload bytes in the frame to send constant data. The bit masks are shown here. For configuration details, refer to the corresponding chapter. 80_H **PREC** Selects whether to take full precision (1) or reduced precision (0) at bit 7 60_H **PREC2** For reduced precision, selects the options with bits [6:5] 10_H **RESERVED** Reserved

data sheet are Not Recommended for New Designs (NRND)
The product(s) mentioned in this


Firmware Version Register (Register 0.30)

This register contains the version of the PHY firmware. The firmware initializes the version number at boot time with its current software version. This register is read-only by the external STA.

IEEE Standard Register=0.30

PHY_FWV **Reset Value**

Firmware Version Register (Register 0.30) **0000_H**



Field	Bits	Type	Description
REL	15	RO	**Release Indication** This parameter indicates either a test or a release version. 0_B **TEST** Indicates a test version. 1_B **RELEASE** Indicates a released version.
MAJOR	14:8	RO	**Major Version Number** Specifies the main version release number of the firmware.
MINOR	7:0	RO	**Minor Version Number** Specifies the sub-version release number of the firmware.

data sheet are Not Recommended for New Designs (NRND)
The product (of products) mentioned in this

6 PHY MMD Registers Detailed Description

Table 30 Register Access Type

Mode	Symbol
Status Register (Status or Ability Register)	RO
Read-Write Register (MDIO Register)	RW
Read-Write Self-Clearing Register (bit is cleared after read from MDIO)	RWSC
Read-Only Self-Clearing Register (bit is cleared after read from MDIO)	ROSC

The product (or products) mentioned in this data sheet are Not Recommended for New Designs (NRND)

6.1 Standard PMAPMD Registers for MMD=0x01

Table 31 Registers Overview- Standard PMAPMD Registers

Register Short Name	Register Long Name	Reset Value
PMA_CTRL1	PMA/PMD Control 1 (Register 1.0)	2058_H
PMA_STAT1	PMA/PMD Status 1 (Register 1.1)	0000_H
PMA_DEVID1	PHY Identifier 1 (Register 1.2)	$C133_H$
PMA_DEVID2	PHY Identifier 2 (Register 1.3)	5400_H 1)
PMA_SPEED_ABILITY	PMA/PMD Speed Ability (Register 1.4)	2070_H
PMA_DIP1	Devices in Package 1 (Register 1.5)	$008B_H$
PMA_DIP2	Devices in Package 2 (Register 1.6)	$C000_H$
PMA_CTL2	PMA/PMD Control 2 (Register 1.7)	0030_H
PMA_STAT2	PMA/PMD Status 2 (Register 1.8)	8200_H
PMA_EXT_ABILITY	PMA/PMD Extended Ability (Register 1.11)	$41A0_H$
PMA_PACKID1	AN Package Identifier (Register 1.14)	$C133_H$
PMA_PACKID2	AN Package Identifier (Register 1.15)	5400_H 1)
PMA_MGBT_EXTAB	PMAPMD Extended Ability (Register 1.21)	0001_H
PMA_MGBT_STAT	MULTIGBASE-T Status (Register 1.129)	0000_H
PMA_MGBT_POLARITY	MULTIGBASE-T Pair Swap and Polarity (Register 1.130)	0003_H
PMA_MGBT_TX_PBO	MULTIGBASE-T Tx Power Backoff and PHY Short Reach Setting (Register 1.131)	0000_H
PMA_MGBT_TEST_MODE	MULTIGBASE-T Test Mode (Register 1.132)	0000_H
PMA_MGBT_SNR_OPMARGIN_A	MULTIGBASE-T SNR Margin Channel A (Register 1.133)	0000_H
PMA_MGBT_SNR_OPMARGIN_B	MULTIGBASE-T SNR Margin Channel B (Register 1.134)	0000_H
PMA_MGBT_SNR_OPMARGIN_C	MULTIGBASE-T SNR Margin Channel C (Register 1.135)	0000_H
PMA_MGBT_SNR_OPMARGIN_D	MULTIGBASE-T SNR Margin Channel D (Register 1.136)	0000_H
PMA_MGBT_MINMARGIN_A	MULTIGBASE-T SNR Minimum Margin Channel A (Register 1.137)	0000_H
PMA_MGBT_MINMARGIN_B	MULTIGBASE-T SNR Minimum Margin Channel B (Register 1.138)	0000_H
PMA_MGBT_MINMARGIN_C	MULTIGBASE-T SNR Minimum Margin Chan C (Register 1.139)	0000_H
PMA_MGBT_MINMARGIN_D	MULTIGBASE-T SNR Minimum Margin Chan D (Register 1.140)	0000_H
PMA_MGBT_POWER_A	MULTIGBASE-T Rx Power Channel A (Register 1.141)	0000_H
PMA_MGBT_POWER_B	MULTIGBASE-T Rx Power Channel B (Register 1.142)	0000_H
PMA_MGBT_POWER_C	MULTIGBASE-T Rx Power Chan C (Register 1.143)	0000_H
PMA_MGBT_POWER_D	MULTIGBASE-T Rx Power Chan D (Register 1.144)	0000_H
PMA_MGBT_SKEW_DELAY_0	MULTIGBASE-T Skew Delay 0 (Register 1.145)	0000_H
PMA_MGBT_SKEW_DELAY_1	MULTIGBASE-T Skew Delay 1 (Register 1.146)	0000_H

Data sheet are Not Recommended for New Designs (NRND)
The product (or product) mentioned in this

Table 31 Registers Overview- Standard PMAPMD Registers (cont'd)

Register Short Name	Register Long Name	Reset Value
PMA_MGBT_FAST_RETRAIN_STA_CTRL	MULTIGBASE-T Skew Delay 2 (Register 1.147)	0010_H
PMA_TIMESYNC_CAP	PMA TimeSync Capability Indication (Register 1.1800)	0000_H

1) For the device specific reset value, see the Product and Package Naming table in the **Product Ordering Information** chapter.

The product (or products) mentioned in this data sheet are Not Recommended for New Designs (NRND)

6.1.1 PMAPMD Register Descriptions

This section describes all the PMAPMD registers in detail.

PMA/PMD Control 1 (Register 1.0)

IEEE Standard Register=1.0

PMA_CTRL1 **Reset Value**

PMA/PMD Control 1 (Register 1.0) **2058_H**

15	14	13	12	11	10 … 7	6	5 … 2	1	0
RST	RES	SSL	RES	LOW_POW*	RES	SSM	SPEED_SEL	NS1	NS2
rw		rw		rw		rw	rw	ro	ro

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

Field	Bits	Type	Description
RST	15	RW	**Reset** 0_B Normal operation 1_B PMA/PMD reset
SSL	13	RW	**Speed Selection (LSB)** Used in conjunction with field SPEED_SEL_MSB. MSB LSB: 00_B 10 Mbps 01_B 100 Mbps 10_B 1000 Mbps 11_B Bits [5:2] select the speed (SPEED_SEL field)
LOW_POWER	11	RW	**Low Power** 0_B Normal operation 1_B Enters low power mode.
SSM	6	RW	**Speed Selection (MSB)** Used in conjunction with field SPEED_SEL_LSB. MSB LSB: 00_B 10 Mbps 01_B 100 Mbps 10_B 1000 Mbps 11_B Bits [5:2] select the speed (SPEED_SEL field)
SPEED_SEL	5:2	RW	**Speed Selection** Bit usage (from bit 5 to bit 2): 0 0 0 0_B Not supported. The speed defaults to 2.5 Gbps. 0 0 0 1_B Not supported. The speed defaults to 2.5 Gbps. 0 0 1 0_B Not supported. The speed defaults to 2.5 Gbps. 0 0 1 1_B Not supported. The speed defaults to 2.5 Gbps. 0 1 0 0_B Not supported. The speed defaults to 2.5 Gbps. 0 1 0 1_B Not supported. The speed defaults to 2.5 Gbps. 0 1 1 0_B 2.5 Gbps 0 1 1 1_B Not supported 1 x x x_B Reserved

Field	Bits	Type	Description (cont'd)
NS1	1	RO	**Not Supported** PMA remote loopback mode is not supported by the GPHY.
NS2	0	RO	**Not Supported** PMA local loopback mode is not supported by the GPHY.


The product (or products) mentioned in this data sheet are Not Recommended for New Designs (NRND)

PMA/PMD Status 1 (Register 1.1)

IEEE Standard Register=1.1

PMA_STAT1 **Reset Value**

PMA/PMD Status 1 (Register 1.1) **0000_H**

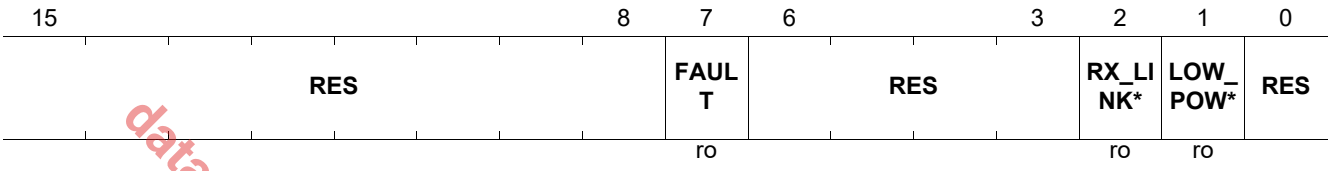

Field	Bits	Type	Description
FAULT	7	RO	**Fault** 0_B Fault condition not detected 1_B Fault condition detected
RX_LINK_STATUS	2	RO	**Receive Link Status** 0_B PMA/PMD receive link down 1_B PMA/PMD receive link up
LOW_POWER_ABILITY	1	RO	**Low Power Ability** 0_B PMA/PMD does not support low power mode. 1_B PMA/PMD supports low power mode.

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this


PHY Identifier 1 (Register 1.2)

IEEE Standard Register=1.2

Bits 31 - 16 of device ID

PMA_DEVID1 **Reset Value**

PHY Identifier 1 (Register 1.2) **C133$_H$**

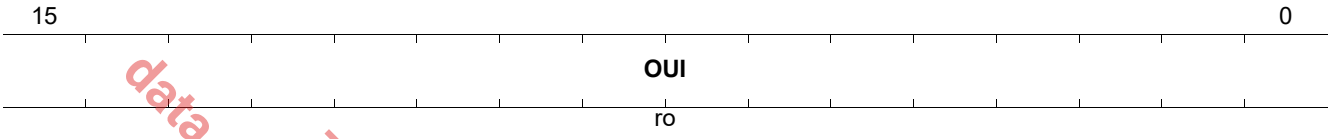

Field	Bits	Type	Description
OUI	15:0	RO	**Organizationally Unique Identifier** Organizationally Unique Identifier Bits 3:18

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this


PHY Identifier 2 (Register 1.3)

IEEE Standard Register=1.3

Bits 15 - 0 of device ID

PMA_DEVID2 **Reset Value**

PHY Identifier 2 (Register 1.3) **5400_H**

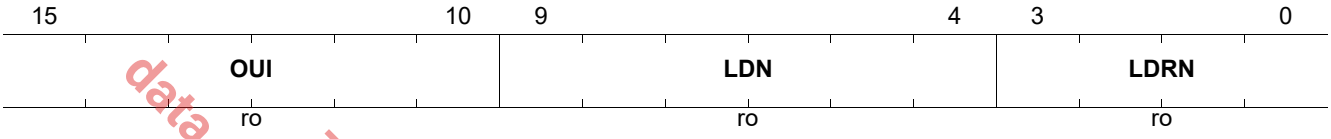

Field	Bits	Type	Description
OUI	15:10	RO	**Organizationally Unique Identifier Bits 19:24**
LDN	9:4	RO	**Device Number** Specifies the device number[1] to distinguish between several different products.
LDRN	3:0	RO	**Device Revision Number** Specifies the device revision number[1] to distinguish between several versions of this device.

1) For the device specific reset value, see the Product and Package Naming table in the **Product Ordering Information** chapter.

data sheet are Not Recommended for New Designs (NRND)
The product(s) mentioned in this

PMA/PMD Speed Ability (Register 1.4)

IEEE Standard Register=1.4

PMA_SPEED_ABILITY **Reset Value**

PMA/PMD Speed Ability (Register 1.4) **2070_H**

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
RES	CAP_5G	CAP_2G5	RES2	RES		CAP_100G	CAP_40G	CAP_10_*	CAP_10M	CAP_100M	CAP_100*	RES	R10PASS*	CAP_2BA*	CAP_10G*
	ro	ro	ro			ro	ro	ro	ro	ro	ro		ro	ro	ro

Field	Bits	Type	Description
CAP_5G	14	RO	**Not Supported** 0_B PMA/PMD is not capable of operating as 5 Gbps. 1_B PMA/PMD is capable of operating at 5 Gbps.
CAP_2G5	13	RO	**2.5 G capable** 0_B PMA/PMD is not capable of operating as 2.5 Gbps. 1_B PMA/PMD is capable of operating at 2.5 Gbps.
RES2	12	RO	**Reserved** Value always 0
CAP_100G	9	RO	**Not Supported** 0_B PMA/PMD is not capable of operating as 100 Gbps. 1_B PMA/PMD is capable of operating at 100 Gbps.
CAP_40G	8	RO	**Not Supported** 0_B PMA/PMD is not capable of operating as 40 Gbps. 1_B PMA/PMD is capable of operating at 40 Gbps.
CAP_10_1G	7	RO	**Not Supported** 0_B PMA/PMD is not capable of operating at 10 Gbps downstream and 1 Gbps upstream. 1_B PMA/PMD is capable of operating at 10 Gbps downstream and 1 Gbps upstream.
CAP_10M	6	RO	**10M capable** 0_B PMA/PMD is not capable of operating as 10 Mbps. 1_B PMA/PMD is capable of operating at 10 Mbps.
CAP_100M	5	RO	**100M capable** 0_B PMA/PMD is not capable of operating as 100 Mbps. 1_B PMA/PMD is capable of operating at 100 Mbps.
CAP_1000M	4	RO	**1000M capable** 0_B PMA/PMD is not capable of operating as 1000 Mbps. 1_B PMA/PMD is capable of operating at 1000 Mbps.
R10PASS_TS_CAPABLE	2	RO	**Not Supported** 0_B PMA/PMD is not capable of operating as 10PASS-TS. 1_B PMA/PMD is capable of operating as 10PASS-TS.

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

Field	Bits	Type	Description (cont'd)
CAP_2BASE_TL	1	RO	**Not Supported** 0_B PMA/PMD is not capable of operating as 2BASE-TL. 1_B PMA/PMD is capable of operating as 2BASE-TL.
CAP_10G_CAP	0	RO	**Not Supported** 0_B PMA/PMD is not capable of operating at 10 Gbps. 1_B PMA/PMD is capable of operating at 10 Gbps.

The product (or products) mentioned in this data sheet are Not Recommended for New Designs (NRND)

Devices in Package 1 (Register 1.5)

IEEE Standard Register=1.5

PMA_DIP1 **Reset Value**

Devices in Package 1 (Register 1.5) **$008B_H$**

15	12	11	10	9	8	7	6	5	4	3	2	1	0
RES		SEP_PMA*	SEP_PMA*	SEP_PMA*	SEP_PMA*	ANEG	TC	DTE_XS	PHY_XS	PCS	WIS	PMD_PMA	CLAUSE_*
ro		ro	ro	ro	ro	ro	ro	ro	ro	ro	ro	ro	ro

Field	Bits	Type	Description
RES	15:12	RO	**Reserved** Ignore on read
SEP_PMA_4	11	RO	**Separate PMA (4)** 0_B Separate PMA (4) not present in package 1_B Separate PMA (4) present in package
SEP_PMA_3	10	RO	**Separate PMA (3)** 0_B Separate PMA (3) not present in package 1_B Separate PMA (3) present in package
SEP_PMA_2	9	RO	**Separate PMA (2)** 0_B Separate PMA (2) not present in package 1_B Separate PMA (2) present in package
SEP_PMA_1	8	RO	**Separate PMA (1)** 0_B Separate PMA (1) not present in package 1_B Separate PMA (1) present in package
ANEG	7	RO	**Auto-Negotiation Present** This bit is always set to 1_B in the GPHY. 0_B ANEG not present in package 1_B ANEG present in package
TC	6	RO	**TC Present** 0_B TC not present in package 1_B TC present in package
DTE_XS	5	RO	**DTE XS Present** 0_B DTE XS not present in package 1_B DTE XS present in package
PHY_XS	4	RO	**PHY XS Present** 0_B PHY XS not present in package 1_B PHY XS present in package
PCS	3	RO	**PCS Present** This bit is always set to 1_B in the GPHY. 0_B PCS not present in package 1_B PCS present in package

data sheet are Not Recommended for New Designs (NRND)
The product(s) mentioned in this

Field	Bits	Type	Description (cont'd)
WIS	2	RO	**WIS Present** 0_B WIS not present in package 1_B WIS present in package
PMD_PMA	1	RO	**PMD/PMA Present** This bit is always set to 1_B in the GPHY. 0_B PMA/PMD not present in package 1_B PMA/PMD present in package
CLAUSE_22	0	RO	**Clause 22 Registers Present** This bit is always set to 1_B in the GPHY. 0_B Clause 22 registers not present in package 1_B Clause 22 registers present in package


data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

Devices in Package 2 (Register 1.6)

IEEE Standard Register=1.6

PMA_DIP2 **Reset Value**

Devices in Package 2 (Register 1.6) **$C000_H$**

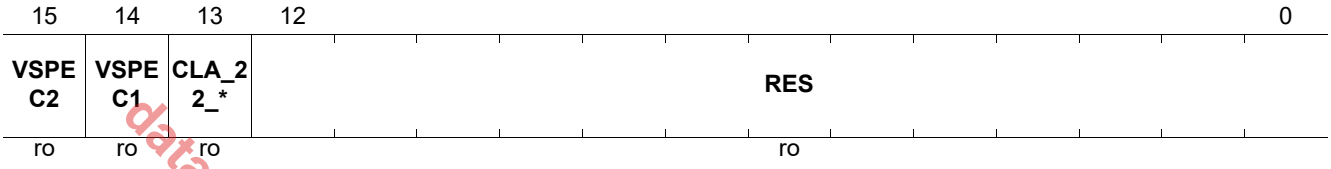

Field	Bits	Type	Description
VSPEC2	15	RO	**Vendor-specific Device 2** This bit is always set to 1_B in the GPHY. 0_B Vendor-specific device 2 not present in package 1_B Vendor-specific device 2 present in package
VSPEC1	14	RO	**Vendor-specific Device 1** This bit is always set to 1_B in the GPHY. 0_B Vendor-specific device 1 not present in package 1_B Vendor-specific device 1 present in package
CLA_22_EXT	13	RO	**Clause 22 Extension** 0_B Clause 22 extension not present in package 1_B Clause 22 extension present in package
RES	12:0	RO	**Reserved** Ignore on read.


data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

PMA/PMD Control 2 (Register 1.7)

IEEE Standard Register=1.7

PMA_CTL2 **Reset Value**

PMA/PMD Control 2 (Register 1.7) **0030_H**



data sheet are Not Recommended for New Designs (NRND)
The product(or products) mentioned in this

Field	Bits	Type	Description
PMA_PMD_TYPE_SEL	5:0	RW	**PMA/PMD Type Selection** 5 4 3 2 1 0 Others = Reserved 1 1 0 0 0 1_B Unsupported, defaults to 2.5GBASE-T PMA 1 1 0 0 0 0_B 2.5GBASE-T PMA 0 1 1 x x_B Unsupported, defaults to 2.5GBASE-T PMA 1 0 1 0 1 1_B Unsupported, defaults to 2.5GBASE-T PMA 1 0 1 0 1 0_B Unsupported, defaults to 2.5GBASE-T PMA 1 0 1 0 0 1_B Unsupported, defaults to 2.5GBASE-T PMA 1 0 1 0 0 0_B Unsupported, defaults to 2.5GBASE-T PMA 1 0 0 1 1 x_B Unsupported, defaults to 2.5GBASE-T PMA 1 0 0 1 0 1_B Unsupported, defaults to 2.5GBASE-T PMA 1 0 0 1 0 0_B Unsupported, defaults to 2.5GBASE-T PMA 1 0 0 0 1 1_B Unsupported, defaults to 2.5GBASE-T PMA 1 0 0 0 1 0_B Unsupported, defaults to 2.5GBASE-T PMA 1 0 0 0 0 1_B Unsupported, defaults to 2.5GBASE-T PMA 1 0 0 0 0 0_B Unsupported, defaults to 2.5GBASE-T PMA 0 1 1 1 x x_B Unsupported, defaults to 2.5GBASE-T PMA 0 1 1 0 1 1_B Unsupported, defaults to 2.5GBASE-T PMA 0 1 1 0 1 0_B Unsupported, defaults to 2.5GBASE-T PMA 0 1 1 0 0 1_B Unsupported, defaults to 2.5GBASE-T PMA 0 1 1 0 0 0_B Unsupported, defaults to 2.5GBASE-T PMA 0 1 0 1 1 1_B Unsupported, defaults to 2.5GBASE-T PMA 0 1 0 1 1 0_B Unsupported, defaults to 2.5GBASE-T PMA 0 1 0 1 0 1_B Unsupported, defaults to 2.5GBASE-T PMA 0 1 0 1 0 0_B Unsupported, defaults to 2.5GBASE-T PMA 0 1 0 0 1 1_B Unsupported, defaults to 2.5GBASE-T PMA 0 1 0 0 1 0_B Unsupported, defaults to 2.5GBASE-T PMA 0 1 0 0 0 1_B Unsupported, defaults to 2.5GBASE-T PMA 0 1 0 0 0 0_B Unsupported, defaults to 2.5GBASE-T PMA

Field	Bits	Type	Description (cont'd)
PMA_PMD_TYPE_SEL	5:0	RW	**PMA/PMD Type Selection (cont'd)** 0 0 1 1 1 1_B 10BASE-T PMA/PMD 0 0 1 1 1 0_B 100BASE-TX PMA/PMD 0 0 1 1 0 1_B Unsupported, defaults to 2.5GBASE-T PMA 0 0 1 1 0 0_B 1000BASE-T PMA/PMD 0 0 1 0 1 1_B Unsupported, defaults to 2.5GBASE-T PMA 0 0 1 0 1 0_B Unsupported, defaults to 2.5GBASE-T PMA 0 0 1 0 0 1_B Unsupported, defaults to 2.5GBASE-T PMA 0 0 1 0 0 0_B Unsupported, defaults to 2.5GBASE-T PMA 0 0 0 1 1 1_B Unsupported, defaults to 2.5GBASE-T PMA 0 0 0 1 1 0_B Unsupported, defaults to 2.5GBASE-T PMA 0 0 0 1 0 1_B Unsupported, defaults to 2.5GBASE-T PMA 0 0 0 1 0 0_B Unsupported, defaults to 2.5GBASE-T PMA 0 0 0 0 1 1_B Unsupported, defaults to 2.5GBASE-T PMA 0 0 0 0 1 0_B Unsupported, defaults to 2.5GBASE-T PMA 0 0 0 0 0 1_B Unsupported, defaults to 2.5GBASE-T PMA 0 0 0 0 0 0_B Unsupported, defaults to 2.5GBASE-T PMA

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

PMA/PMD Status 2 (Register 1.8)

IEEE Standard Register=1.8

PMA_STAT2 **Reset Value**

PMA/PMD Status 2 (Register 1.8) **8200_H**

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
DEVICE_PRESENT		TX_FAUL*	RX_FAUL*	TX_FAULT	RX_FAULT	EXT_ABI*	PMD_TX_*	RMGBT_S*	RMGBT_L*	RMGBT_E*	RMGBT_L*	RMGBT_S*	RMGBT_L*	RMGBT_E*	PMA_LOC*
ro		ro	ro	ro	ro	ro	ro	ro	ro	ro	ro	ro	ro	ro	ro

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

Field	Bits	Type	Description
DEVICE_PRESENT	15:14	RO	**Device Present** 00_B No device responding at this address 01_B No device responding at this address 10_B Device responding at this address 11_B No device responding at this address
TX_FAULT_ABILITY	13	RO	**Transmit Fault Ability** 0_B PMA/PMD is not able to detect a fault condition on the transmit path. 1_B PMA/PMD is able to detect a fault condition on the transmit path.
RX_FAULT_ABILITY	12	RO	**Receive Fault Ability** 0_B PMA/PMD is not able to detect a fault condition on the receive path. 1_B PMA/PMD is able to detect a fault condition on the receive path.
TX_FAULT	11	RO	**Transmit Fault** 0_B No fault condition on transmit path 1_B Fault condition on transmit path
RX_FAULT	10	RO	**Receive Fault** 0_B No fault condition on receive path 1_B Fault condition on receive path
EXT_ABILITIES	9	RO	**Extended Abilities** 0_B PMA/PMD does not have extended abilities. 1_B PMA/PMD has extended abilities listed in register 1.11.
PMD_TX_DISABLE	8	RO	**PMD Transmit Disable** 0_B PMD is not able to disable the transmit path. 1_B PMD is able to disable the transmit path.
RMGBT_SR_ABILITY	7	RO	**MULTIGBASE-SR Ability** 0_B PMA/PMD is not able to perform MULTIGBASE-SR. 1_B PMA/PMD is able to perform MULTIGBASE-SR.
RMGBT_LR_ABILITY	6	RO	**MULTIGBASE-LR Ability** 0_B PMA/PMD is not able to perform MULTIGBASE-LR. 1_B PMA/PMD is able to perform MULTIGBASE-LR.
RMGBT_ER_ABILITY	5	RO	**MULTIGBASE-ER Ability** 0_B PMA/PMD is not able to perform MULTIGBASE-ER. 1_B PMA/PMD is able to perform MULTIGBASE-ER.

Field	Bits	Type	Description (cont'd)
RMGBT_LX4_ ABILITY	4	RO	**MULTIGBASE-LX4 Ability** 0_B PMA/PMD is not able to perform MULTIGBASE-LX4. 1_B PMA/PMD is able to perform MULTIGBASE-LX4.
RMGBT_SW_ ABILITY	3	RO	**MULTIGBASE-SW Ability** 0_B PMA/PMD is not able to perform MULTIGBASE-SW. 1_B PMA/PMD is able to perform MULTIGBASE-SW.
RMGBT_LW_ ABILITY	2	RO	**MULTIGBASE-LW Ability** 0_B PMA/PMD is not able to perform MULTIGBASE-LW. 1_B PMA/PMD is able to perform MULTIGBASE-LW.
RMGBT_EW_ ABILITY	1	RO	**MULTIGBASE-EW Ability** 0_B PMA/PMD is not able to perform MULTIGBASE-EW. 1_B PMA/PMD is able to perform MULTIGBASE-EW.
PMA_LOCAL_ LOOPBACK	0	RO	**PMA Local Loopback** 0_B PMA is not able to perform a local loopback function. 1_B PMA is able to perform a local loopback function.

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

PMA/PMD Extended Ability (Register 1.11)

IEEE Standard Register=1.11

PMA_EXT_ABILITY **Reset Value**

PMA/PMD Extended Ability (Register 1.11) **$41A0_H$**

15	14	13	11	10	9	8	7	6	5	4	3	2	1	0
RES	R2G5_EX*	RES		R40G_10*	P2MP_AB*	R10BASE*	R100BAS*	R1000BA*	R1000BA*	RMGBT_K*	RMGBT_K*	RMGBT_A*	RMGBT_L*	RMGBT_C*
	ro			ro	ro	ro	ro	ro	ro	ro	ro	ro	ro	ro

Field	Bits	Type	Description
R2G5_EXT_ABILITIES	14	RO	**2.5G/5G Extended Abilities** 0_B PMA/PMD does not have 2.5G/5G extended abilities. 1_B PMA/PMD has 2.5G/5G extended abilities listed in register 1.21.
R40G_100G_EXT_ABILITIES	10	RO	**40G/100G Extended Abilities** 0_B PMA/PMD does not have 40G/100G extended abilities. 1_B PMA/PMD has 40G/100G extended abilities listed in register 1.13.
P2MP_ABILITY	9	RO	**P2MP Ability** 0_B PMA/PMD does not have P2MP extended abilities. 1_B PMA/PMD has P2MP abilities listed in register 1.12.
R10BASE_T_ABILITY	8	RO	**10BASE-T Ability** 0_B PMA/PMD is not able to perform 10BASE-T. 1_B PMA/PMD is able to perform 10BASE-T.
R100BASE_TX_ABILITY	7	RO	**100BASE-TX Ability** 0_B PMA/PMD is not able to perform 100BASE-TX. 1_B PMA/PMD is able to perform 100BASE-TX.
R1000BASE_KX_ABILITY	6	RO	**1000BASE-KX Ability** 0_B PMA/PMD is not able to perform 1000BASE-KX. 1_B PMA/PMD is able to perform 1000BASE-KX.
R1000BASE_T_ABILITY	5	RO	**1000BASE-T Ability** 0_B PMA/PMD is not able to perform 1000BASE-T. 1_B PMA/PMD is able to perform 1000BASE-T.
RMGBT_KR_ABILITY	4	RO	**MULTIGBASE-KR Ability** 0_B PMA/PMD is not able to perform MULTIGBASE-KR. 1_B PMA/PMD is able to perform MULTIGBASE-KR.
RMGBT_KX4_ABILITY	3	RO	**MULTIGBASE-KX4 Ability** 0_B PMA/PMD is not able to perform MULTIGBASE-KX4. 1_B PMA/PMD is able to perform MULTIGBASE-KX4.
RMGBT_ABILITY	2	RO	**10GBASE-T Ability** 0_B PMA/PMD is not able to perform MULTIGBASE-T. 1_B PMA/PMD is able to perform MULTIGBASE-T.
RMGBT_LRM_ABILITY	1	RO	**MULTIGBASE-LRM Ability** 0_B PMA/PMD is not able to perform MULTIGBASE-LRM. 1_B PMA/PMD is able to perform MULTIGBASE-LRM.

data sheet are Not Recommended for New Designs (NRND)
The product (or product(s) mentioned in this

Field	Bits	Type	Description (cont'd)
RMGBT_CX4_ ABILITY	0	RO	**MULTIGBASE-CX4 Ability** 0_B PMA/PMD is not able to perform MULTIGBASE-CX4. 1_B PMA/PMD is able to perform MULTIGBASE-CX4.


The product (or products) mentioned in this data sheet are Not Recommended for New Designs (NRND)

AN Package Identifier (Register 1.14)

IEEE Standard Register=1.14

PMA_PACKID1 **Reset Value**

AN Package Identifier (Register 1.14) **$C133_H$**

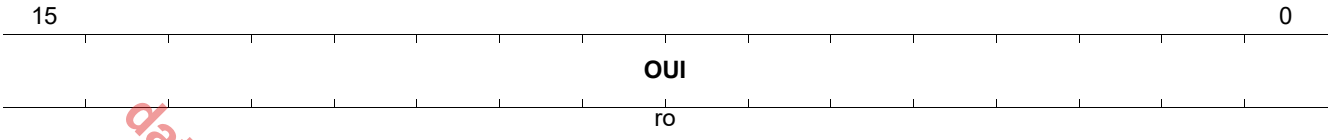

Field	Bits	Type	Description
OUI	15:0	RO	**Organizationally Unique Identifier** Organizationally Unique Identifier Bits 3:18


data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

AN Package Identifier (Register 1.15)

IEEE Standard Register=1.15

PMA_PACKID2 **Reset Value**

AN Package Identifier (Register 1.15) **5400_H**

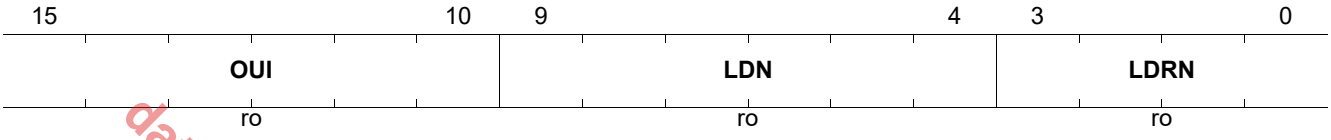

Field	Bits	Type	Description
OUI	15:10	RO	**Organizationally Unique Identifier Bits 19:24**
LDN	9:4	RO	**Device Number** Specifies the device number[1)] to distinguish between several different products.
LDRN	3:0	RO	**Device Revision Number** Specifies the device revision number[1)] to distinguish between several versions of this device.

1) For the device specific reset value, see the Product and Package Naming table in the **Product Ordering Information** chapter.

data sheet are Not Recommended for New Designs (NRND)
The product(s) mentioned in this


PMAPMD Extended Ability (Register 1.21)

Read only. Write from the STA has no effect.

IEEE Standard Register=1.21

PMA_MGBT_EXTAB **Reset Value**

PMAPMD Extended Ability (Register 1.21) **0001_H**

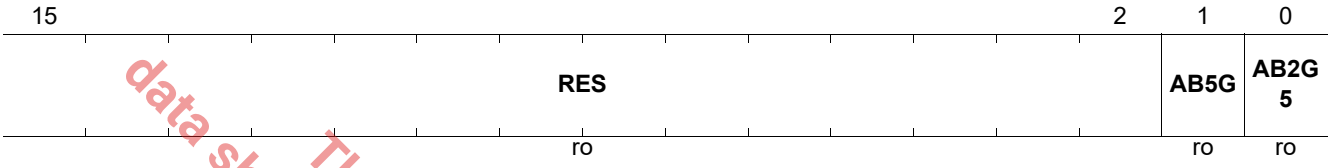

Field	Bits	Type	Description
RES	15:2	RO	**Reserved** Value always 0
AB5G	1	RO	**PMA Ability to Perform 5GBASE-T** 0_B **UNABLE** PMA is not able to perform 5GBASE-T. 1_B **ABLE** PMA is able to perform 5GBASE-T.
AB2G5	0	RO	**PMA Ability to Perform 2.5GBASE-T** 0_B **UNABLE** PMA is not able to perform 2.5GBASE-T. 1_B **ABLE** PMA is able to perform 2.5GBASE-T.

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

MULTIGBASE-T Status (Register 1.129)

IEEE Standard Register=1.129

Indicates startup for 2.5G was completed.


When read as a 1, indicates that the startup protocol (for 2.5G/5GBASE-T) was completed (link_status = OK, pcs_status = OK), and that the contents of bits 1.130.11:0 (Polarity), 1.131.15:10 (PBO), 1.145.14:8 (Skew), 1.146.14:8, and 1.146.6:0 (Skew), established during the startup protocol, are valid.

When read as a 0, indicates that the startup process was not completed, and that the contents of bit 1.129.0, established during the startup protocol, are invalid. A PMA must return a value of 0 in bit 1.129.1 when the PMA link_status = FAIL.

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

PMA_MGBT_STAT **Reset Value**

MULTIGBASE-T Status (Register 1.129) **0000_H**

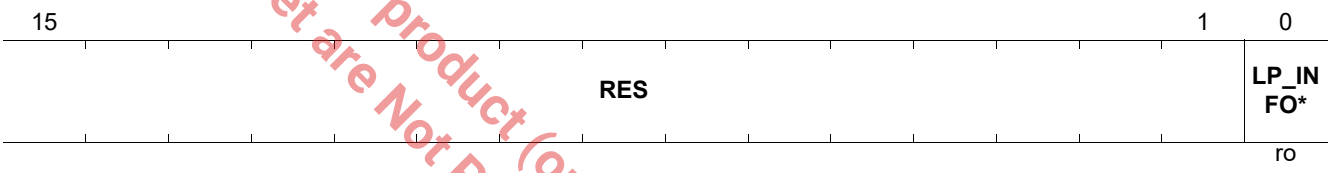


Field	Bits	Type	Description
LP_INFORMATION_VALID	0	RO	**LP Information Valid** When set, this bit indicates the startup protocol (126.4.2.5) was completed. 0_B Link partner information is invalid 1_B Link partner information is valid

MULTIGBASE-T Pair Swap and Polarity (Register 1.130)

IEEE Standard Register=1.130

PMA_MGBT_POLARITY **Reset Value**

MULTIGBASE-T Pair Swap and Polarity (Register 1.130) **0003_H**

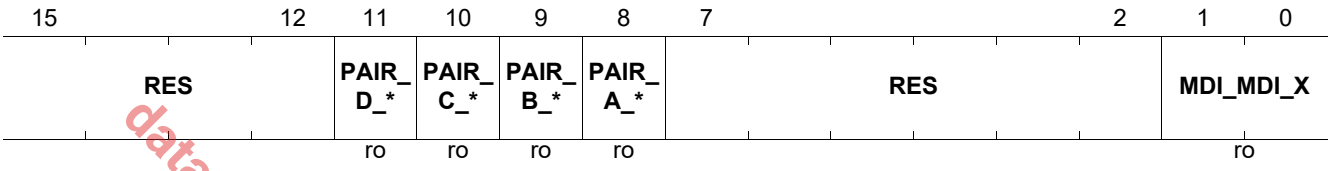

Field	Bits	Type	Description
PAIR_D_POLARITY	11	RO	**Pair D Polarity** 0_B Polarity of pair D is not reversed. 1_B Polarity of pair D is reversed.
PAIR_C_POLARITY	10	RO	**Pair C Polarity** 0_B Polarity of pair C is not reversed. 1_B Polarity of pair C is reversed.
PAIR_B_POLARITY	9	RO	**Pair B Polarity** 0_B Polarity of pair B is not reversed. 1_B Polarity of pair B is reversed.
PAIR_A_POLARITY	8	RO	**Pair A Polarity** 0_B Polarity of pair A is not reversed. 1_B Polarity of pair A is reversed.
MDI_MDI_X	1:0	RO	**MDI/MDI-X** Indicates the status of pair swaps at the MDI / MD-X. 00_B **ABCD CROSS** Pair AB and Pair CD crossover 01_B **CD CROSS** Pair CD crossover only 10_B **AB CROSS** Pair AB crossover only 11_B **NORMAL** No crossover


data sheet are Not Recommended for New Designs (NRND)
The product (or product(s) mentioned in this

MULTIGBASE-T Tx Power Backoff and PHY Short Reach Setting (Register 1.131)

IEEE Standard Register=1.131

PMA_MGBT_TX_PBO **Reset Value**

MULTIGBASE-T TX Power Backoff and PHY Short Reach Setting (Register 1.131) **0000_H**

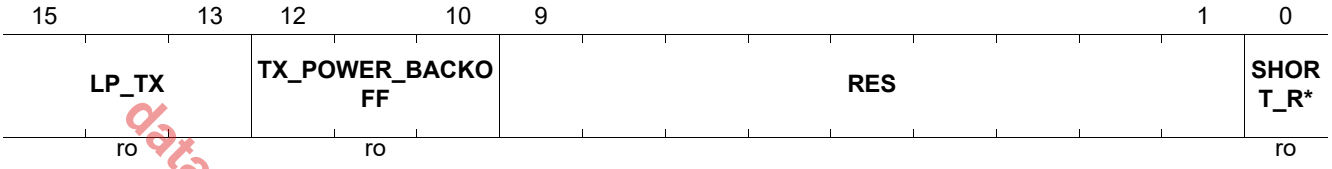

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this


Field	Bits	Type	Description
LP_TX	15:13	RO	**Link Partner Tx** The power backoff setting of the link partner. The bit number assignment order is: 15 14 13 000_B 0 dB 001_B 2 dB 010_B 4 dB 011_B 6 dB 100_B 8 dB 101_B 10 dB 110_B 12 dB 111_B 14 dB
TX_POWER_BACKOFF	12:10	RO	**Tx Power Backoff** The power backoff of PHY211 PMA. The bit number assignment order is: 12 11 10 000_B 0 dB 001_B 2 dB 010_B 4 dB 011_B 6 dB 100_B 8 dB 101_B 10 dB 110_B 12 dB 111_B 14 dB
SHORT_REACH_MODE	0	RO	**Short Reach Mode** 0_B PHY is not operating in short reach mode 1_B PHY is operating in short reach mode (not supported)

MULTIGBASE-T Test Mode (Register 1.132)

IEEE Standard Register=1.132

PMA_MGBT_TEST_MODE **Reset Value**

MULTIGBASE-T Test Mode (Register 1.132) **0000_H**



Field	Bits	Type	Description
TEST_MODE_CTL	15:13	RW	**Test Mode Control** 000_B Normal operation 001_B Test mode 1 010_B Test mode 2 011_B Test mode 3 100_B Test mode 4 101_B Test mode 5 110_B Test mode 6 111_B Test mode 7
TXTER_TEST	12:10	RW	**Transmitter Test** Frequencies for tones used in Test Mode 4. 000_B Reserved 001_B Dual tone 1 010_B Dual tone 2 011_B Reserved 100_B Dual tone 3 101_B Dual tone 4 110_B Dual tone 5 111_B Reserved

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this


MULTIGBASE-T SNR Margin Channel A (Register 1.133)

Register 1.133 contains the current SNR operating margin measured at the slicer input for channel A for the MULTIGBASE-T PMA.

IEEE Standard Register=1.133

PMA_MGBT_SNR_OPMARGIN_A **Reset Value**

MULTIGBASE-T SNR Margin Channel A (Register 1.133) **0000_H**



Field	Bits	Type	Description
OPMARGIN_A	15:0	RO	**OPMARGIN_A** SNR operating margin measured at the slicer input for channel A

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this


MULTIGBASE-T SNR Margin Channel B (Register 1.134)

Register 1.134 contains the current SNR operating margin measured at the slicer input for channel B for the MULTIGBASE-T PMA.

IEEE Standard Register=1.134

PMA_MGBT_SNR_OPMARGIN_B **Reset Value**

MULTIGBASE-T SNR Margin Channel B (Register 1.134) **0000_H**



Field	Bits	Type	Description
OPMARGIN_B	15:0	RO	**OPMARGIN_B** SNR operating margin measured at the slicer input for channel B

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this


MULTIGBASE-T SNR Margin Channel C (Register 1.135)

Register 1.135 contains the current SNR operating margin measured at the slicer input for channel C for the MULTIGBASE-T PMA.

IEEE Standard Register=1.135

PMA_MGBT_SNR_OPMARGIN_C **Reset Value**

MULTIGBASE-T SNR Margin Channel C (Register 1.135) **0000_H**



Field	Bits	Type	Description
OPMARGIN_C	15:0	RO	**OPMARGIN_C** SNR operating margin measured at the slicer input for channel C

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this


MULTIGBASE-T SNR Margin Channel D (Register 1.136)

Register 1.136 contains the current SNR operating margin measured at the slicer input for channel D for the MULTIGBASE-T PMA.

IEEE Standard Register=1.136

PMA_MGBT_SNR_OPMARGIN_D **Reset Value**

MULTIGBASE-T SNR Margin Channel D (Register 1.136) **0000_H**



Field	Bits	Type	Description
OPMARGIN_D	15:0	RO	**OPMARGIN_D** SNR operating margin measured at the slicer input for channel D

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this


MULTIGBASE-T SNR Minimum Margin Channel A (Register 1.137)

The minimum margin channel A register contains a latched copy of the lowest value observed in the SNR operating margin channel A register (1.133) since the last read.

IEEE Standard Register=1.137

PMA_MGBT_MINMARGIN_A **Reset Value**

MULTIGBASE-T SNR Minimum Margin Channel A (Register 1.137) **0000_H**

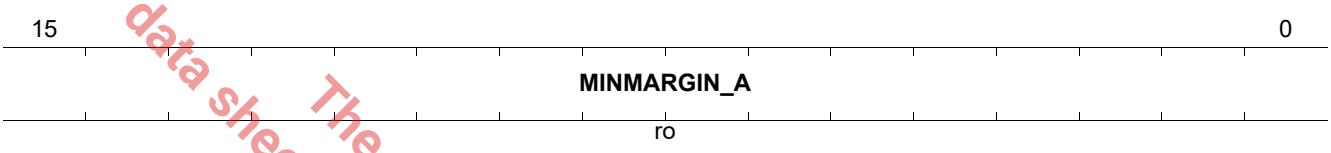

Field	Bits	Type	Description
MINMARGIN_A	15:0	RO	**MINMARGIN_A** Lowest value observed in the SNR operating margin channel A register (1.133) since the last read

data sheet are not Recommended for New Designs (NRND)
The product(s) mentioned in this


MULTIGBASE-T SNR Minimum Margin Channel B (Register 1.138)

The minimum margin channel A register contains a latched copy of the lowest value observed in the SNR operating margin channel B register (1.134) since the last read.

IEEE Standard Register=1.138

PMA_MGBT_MINMARGIN_B **Reset Value**

MULTIGBASE-T SNR Minimum Margin Channel B (Register 1.138) **0000_H**

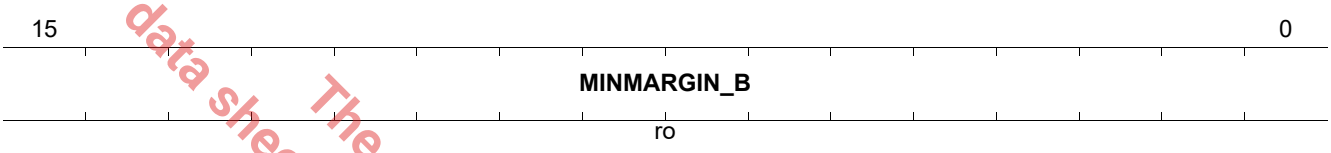

Field	Bits	Type	Description
MINMARGIN_B	15:0	RO	**MINMARGIN_B** Lowest value observed in the SNR operating margin channel B register (1.134) since the last read

data sheet are not Recommended for New Designs (NRND)
The product(s) mentioned in this


MULTIGBASE-T SNR Minimum Margin Chan C (Register 1.139)

The minimum margin channel C register contains a latched copy of the lowest value observed in the SNR operating margin channel C register (1.135) since the last read.

IEEE Standard Register=1.139

PMA_MGBT_MINMARGIN_C **Reset Value**

MULTIGBASE-T SNR Minimum Margin Chan C (Register 1.139) **0000_H**

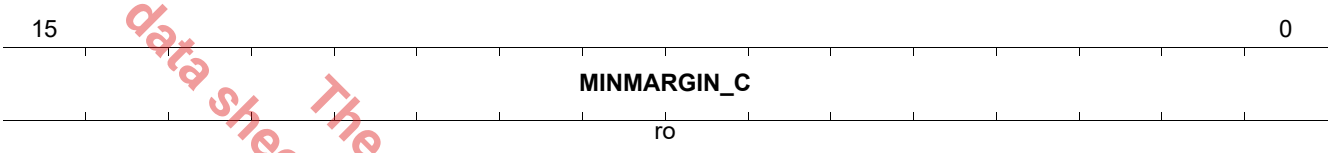

Field	Bits	Type	Description
MINMARGIN_C	15:0	RO	**MINMARGIN_C** Lowest value observed in the SNR operating margin channel C register (1.135) since the last read

data sheet are not Recommended for New Designs (NRND)
The product(s) mentioned in this


MULTIGBASE-T SNR Minimum Margin Chan D (Register 1.140)

The Minimum margin channel D register contains a latched copy of the lowest value observed in the SNR operating margin channel D register (1.136) since the last read.

IEEE Standard Register=1.140

PMA_MGBT_MINMARGIN_D **Reset Value**

MULTIGBASE-T SNR Minimum Margin Chan D (Register 1.140) **0000_H**

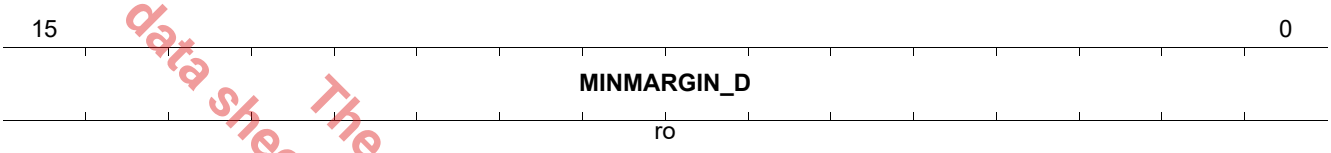

Field	Bits	Type	Description
MINMARGIN_D	15:0	RO	**MINMARGIN_D** Lowest value observed in the SNR operating margin channel D register (1.136) since the last read

data sheet are not Recommended for New Designs (NRND)
The product(s) mentioned in this


MULTIGBASE-T Rx Power Channel A (Register 1.141)

The Rx signal power channel A register is read only and contains the receive signal power measured at the MDI during training as described in 55.4.3.1.

IEEE Standard Register=1.141

PMA_MGBT_POWER_A **Reset Value**

MULTIGBASE-T Rx Power Channel A (Register 1.141) **0000_H**



Field	Bits	Type	Description
POWER_A	15:0	RO	**POWER_A** Receive signal power measured at the MDI during training

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this


MULTIGBASE-T Rx Power Channel B (Register 1.142)

The Rx signal power channel B register is read only and contains the receive signal power measured at the MDI during training as described in 55.4.3.1.

IEEE Standard Register=1.142

PMA_MGBT_POWER_B **Reset Value**

MULTIGBASE-T Rx Power Channel B (Register 1.142) **0000_H**

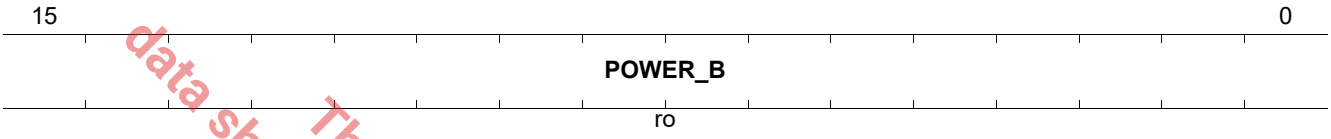

Field	Bits	Type	Description
POWER_B	15:0	RO	**POWER_B** Receive signal power measured at the MDI during training

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this


MULTIGBASE-T Rx Power Chan C (Register 1.143)

The Rx signal power channel C register is read only and contains the receive signal power measured at the MDI during training as described in 55.4.3.1.

IEEE Standard Register=1.143

PMA_MGBT_POWER_C **Reset Value**

MULTIGBASE-T Rx Power Chan C (Register 1.143) **0000_H**

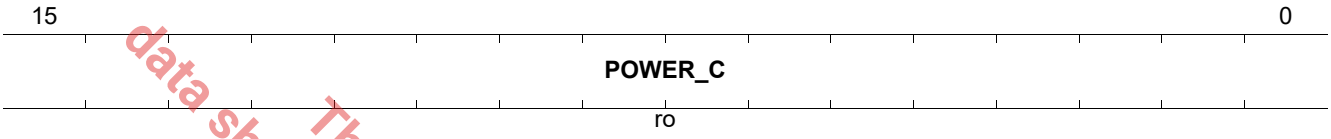

Field	Bits	Type	Description
POWER_C	15:0	RO	**POWER_C** Receive signal power measured at the MDI during training

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this


MULTIGBASE-T Rx Power Chan D (Register 1.144)

The Rx signal power channel D register is read only and contains the receive signal power measured at the MDI during training as described in 55.4.3.1.

IEEE Standard Register=1.144

PMA_MGBT_POWER_D **Reset Value**

MULTIGBASE-T Rx Power Chan D (Register 1.144) **0000_H**

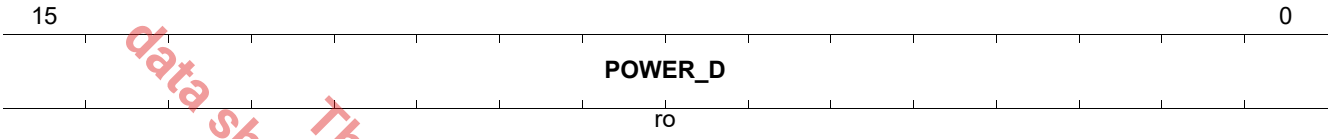

Field	Bits	Type	Description
POWER_D	15:0	RO	**POWER_D** Receive signal power measured at the MDI during training

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this


MULTIGBASE-T Skew Delay 0 (Register 1.145)

IEEE Standard Register=1.145

The skew delay reports the current skew delay on each of the pairs with respect to physical pair A. It is reported with 1.25 ns resolution to an accuracy of 2.5 ns. The number is in two's complement notation with positive values representing delay and negative values representing advance with respect to physical pair A. When the delay exceeds the maximum amount represented by the range -80 ns to +78.75 ns, the field displays the maximum value.

PMA_MGBT_SKEW_DELAY_0 **Reset Value**

MULTIGBASE-T Skew Delay 0 (Register 1.145) **0000_H**

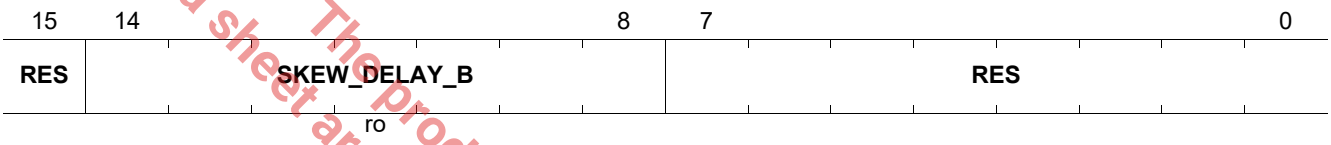

Field	Bits	Type	Description
SKEW_DELAY_B	14:8	RO	**Skew Delay B** Skew delay for pair B

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this


MULTIGBASE-T Skew Delay 1 (Register 1.146)

IEEE Standard Register=1.146

The skew delay reports the current skew delay on each of the pairs with respect to physical pair A. It is reported with 1.25 ns resolution to an accuracy of 2.5 ns. The number is in two's complement notation with positive values representing delay and negative values representing advance with respect to physical pair A. When the delay exceeds the maximum amount represented by the range -80 ns to +78.75 ns, the field displays the maximum value.

PMA_MGBT_SKEW_DELAY_1 **Reset Value**

MULTIGBASE-T Skew Delay 1 (Register 1.146) **0000_H**

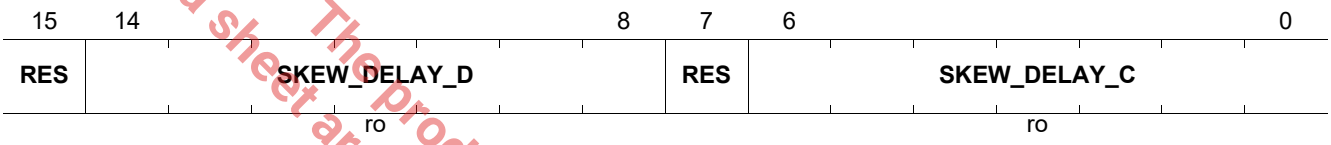

Field	Bits	Type	Description
SKEW_DELAY_D	14:8	RO	**Skew Delay D** Skew delay for pair D
SKEW_DELAY_C	6:0	RO	**Skew Delay C** Skew delay for pair C

data sheet are Not Recommended for New Designs (NRND)
The product (or product(s) mentioned in this

MULTIGBASE-T Skew Delay 2 (Register 1.147)

IEEE Standard Register=1.147

PMA_MGBT_FAST_RETRAIN_STA_CTRL **Reset Value**

MULTIGBASE-T Skew Delay 2 (Register 1.147) **0010_H**



Field	Bits	Type	Description
LP_FAST_RETRAIN_COUNT	15:11	RO	**LP Fast Retrain Count** Counts the number of fast retrains requested by the link partner.
LD_FAST_RETRAIN_COUNT	10:6	RO	**LD Fast Retrain Count** Counts the number of fast retrains requested by the local device.
FAST_RETRAIN_ABILITY	4	RO	**Fast Retrain Ability** 0_B Fast retrain capability is not supported. 1_B Fast retrain capability is supported.
FAST_RETRAIN_NEGOTIATED	3	RO	**Fast Retrain Negotiated** 0_B Fast retrain capability was not negotiated. 1_B Fast retrain capability was negotiated.
FAST_RETRAIN_SIG_TYPE	2:1	RW	**Fast Retrain Signal Type** 00_B PHY signals IDLE during fast retrain 01_B PHY signals local fault during fast retrain 10_B PHY signals link interruption during fast retrain 11_B Reserved
FAST_RETRAIN_ENABLE	0	RW	**Fast Retrain Enable** 0_B Fast retrain capability is disabled. 1_B Fast retrain capability is enabled.

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

PMA TimeSync Capability Indication (Register 1.1800)


PMA TimeSync Capability indication register.

GPHY does not support providing data path delay information.

IEEE Standard Register=1.1800

PMA_TIMESYNC_CAP **Reset Value**

PMA TimeSync Capability Indication (Register 1.1800) **0000_H**

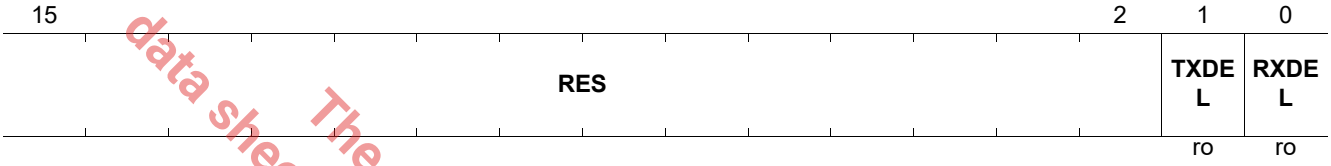

Field	Bits	Type	Description
TXDEL	1	RO	**Transmit Data Path Delay Information** Not supported by the GPHY. 0_B **NONE** PHYs do not have this capability. 1_B **CAPABLE** Minimum and maximum Tx data path delay available
RXDEL	0	RO	**Receive Data Path Delay Information** Not supported by the GPHY. 0_B **NONE** PHYs do not have this capability. 1_B **CAPABLE** Minimum and maximum Rx data path delay available

data sheet are not recommended for New Designs (NRND)
The product(s) mentioned in this

6.2 Standard PCS Registers

This section describes the PCS registers for MMD device 0x03.

Table 32 Registers Overview- Standard PCS Registers

Register Short Name	Register Long Name	Reset Value
PCS_CTRL1	PCS Control 1 (Register 3.0)	$205C_H$
PCS_STAT1	PCS Status 1 (Register 3.1)	0000_H
PCS_DEVID1	PHY Identifier 1 (Register 3.2)	$C133_H$
PCS_DEVID2	PHY Identifier 2 (Register 3.3)	5400_H 1)
PCS_SPEED_ABILITY	PCS Speed Ability (Register 3.4)	0040_H
PCS_DIP1	PCS Devices in Package 1 (Register 3.5)	$008B_H$
PCS_DIP2	PCS Devices in Package 2 (Register 3.6)	$C000_H$
PCS_CTRL2	PCS Control 2 (Register 3.7)	$000A_H$
PCS_STAT2	PCS Status 2 (Register 3.8)	9000_H
PCS_PACKID1	PCS Package Identifier 1 (Register 3.14)	$C133_H$
PCS_PACKID2	PCS Package Identifier 2 (Register 3.15)	5400_H 1)
PCS_EEE_CAP	PCS EEE Capability (Register 3.20)	0006_H
PCS_EEE_CAP2	EEE Control and Capability 2 (Register 3.21)	0001_H
PCS_EEE_WAKERR	PCS EEE Status Register 1 (Register 3.22)	0000_H
PCS_2G5_STAT1	BASE-R and 10GBASE-T PCS Status 1 (Register 3.32)	0000_H
PCS_2G5_STAT2	MULTIGBASE-T PCS Status 2 (Register 3.33)	0000_H
PCS_TIMESYNC_CAP	PCS TimeSync Capability Register (Register 3.1800)	0000_H

1) For the device specific reset value, see the Product and Package Naming table in the **Product Ordering Information** chapter.

Data sheet are Not Recommended for New Designs (NRND)
The Product (or Products) mentioned in this

6.2.1 PCS Register Descriptions

This section describes all the PCS registers in detail.

PCS Control 1 (Register 3.0)

IEEE Standard Register=3.0

PCS_CTRL1 **Reset Value**

PCS Control 1 (Register 3.0) **$205C_H$**

15	14	13	12	11	10	9 … 7	6	5 … 2	1	0
RST	LOOP BACK	SSL	RES	LOW_ POW*	RXCK ST	RES	SSM	SPEED_SEL	RES	
rw	rw	rw		rw	rw		rw	rw		

Field	Bits	Type	Description
RST	15	RW	**Reset** 0_B Normal operation 1_B PCS reset - Self-clearing
LOOPBACK	14	RW	**Loopback** 0_B Disable loopback mode 1_B Enable loopback mode
SSL	13	RW	**Forced Speed Selection (LSB)** This bit is used in conjunction with SPEED_SEL_LSB. The bit assignment order is: MSB LSB 00_B 10 Mbps 01_B 100 Mbps 10_B 1000 Mbps 11_B Bits [5:2] select the speed
LOW_POWER	11	RW	**Low Power** 0_B Normal operation 1_B Low-power mode
RXCKST	10	RW	**Clock Stop Enable** The MAC sets this bit to active to allow the GPHY to stop the clocking during the LPI_MODE. 0_B The clock is not stoppable. 1_B The GPHY stops the (X)GMII clock during LPI.
SSM	6	RW	**Forced Speed Selection (MSB)** This bit is used in conjunction with SPEED_SEL_MSB. The bit assignment order is: MSB LSB 00_B 10 Mbps 01_B 100 Mbps 10_B 1000 Mbps 11_B Bits [5:2] select the speed

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

Field	Bits	Type	Description (cont'd)
SPEED_SEL	5:2	RW	**Forced Speed Selection Values** $0\ 0\ 0\ 0_B$ Unsupported, defaults to 2.5 Gbps $0\ 0\ 0\ 1_B$ Unsupported, defaults to 2.5 Gbps $0\ 0\ 1\ 0_B$ Unsupported, defaults to 2.5 Gbps $0\ 0\ 1\ 1_B$ Unsupported, defaults to 2.5 Gbps $0\ 1\ 0\ 0_B$ Unsupported, defaults to 2.5 Gbps $0\ 1\ 0\ 1_B$ Reserved $0\ 1\ 1\ 1_B$ 2.5 Gbps $1\ 1\ x\ x_B$ Reserved

The product (or products) mentioned in this data sheet are Not Recommended for New Designs (NRND)

PCS Status 1 (Register 3.1)

IEEE Standard Register=3.1

PCS_STAT1 **Reset Value**

PCS Status 1 (Register 3.1) **0000_H**

15 12	11	10	9	8	7	6	5 3	2	1	0
RES	TX_LPI_*	RX_LPI_*	TX_LPI_*	RX_LPI_*	FAULT	TXCKST	RES	PCS_RX_*	LOW_POW*	RES
	ro	ro	ro	ro	ro	ro		ro	ro	

Field	Bits	Type	Description
TX_LPI_RXD	11	RO	**Tx LPI Received** 0_B LPI not received 1_B Tx PCS received LPI
RX_LPI_RXD	10	RO	**Rx LPI Received** 0_B LPI not received 1_B Rx PCS received LPI
TX_LPI_INDICATION	9	RO	**Tx LPI Indication** 0_B PCS is not currently receiving LPI. 1_B Tx PCS is currently receiving LPI.
RX_LPI_INDICATION	8	RO	**Rx LPI Indication** 0_B PCS is not currently receiving LPI. 1_B Rx PCS is currently receiving LPI.
FAULT	7	RO	**Fault** 0_B No fault condition detected 1_B Fault condition detected
TXCKST	6	RO	**Clock Stop Capable** 0_B The clock is not stoppable. 1_B The MAC is allowed to stop the clock during LPI.
PCS_RX_LINK_STATUS	2	RO	**PCS Receive Link Status** 0_B PCS receive link down 1_B PCS receive link up
LOW_POWER_ABILITY	1	RO	**Low Power Ability** 0_B PCS does not support low power mode. 1_B PCS supports low power mode.


data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

PHY Identifier 1 (Register 3.2)

IEEE Standard Register=3.2

PCS_DEVID1 **Reset Value**

PHY Identifier 1 (Register 3.2) **$C133_H$**

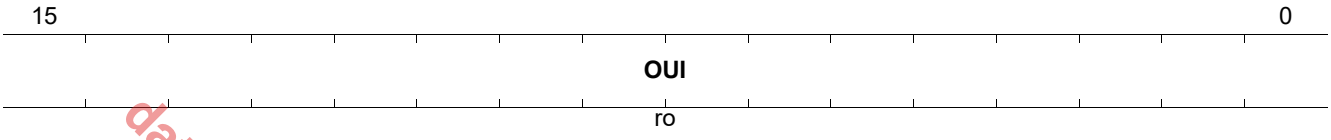

Field	Bits	Type	Description
OUI	15:0	RO	**Organizationally Unique Identifier Bits 3:18**

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this


PHY Identifier 2 (Register 3.3)

Organizationally Unique Identifier Bits 19:24

IEEE Standard Register=3.3

PCS_DEVID2 **Reset Value**

PHY Identifier 2 (Register 3.3) **5400_H**

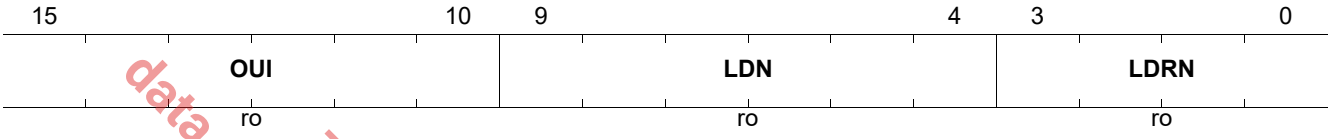

Field	Bits	Type	Description
OUI	15:10	RO	**Organizationally Unique Identifier Bits 19:24**
LDN	9:4	RO	**Device Number** Specifies the device number[1] to distinguish between several different products.
LDRN	3:0	RO	**Device Revision Number** Specifies the device revision number[1] to distinguish between several versions of this device.

1) For the device specific reset value, see the Product and Package Naming table in the **Product Ordering Information** chapter.


data sheet are Not Recommended for New Designs (NRND)
The product(s) mentioned in this

PCS Speed Ability (Register 3.4)

IEEE Standard Register=3.4

PCS_SPEED_ABILITY **Reset Value**

PCS Speed Ability (Register 3.4) **0040_H**

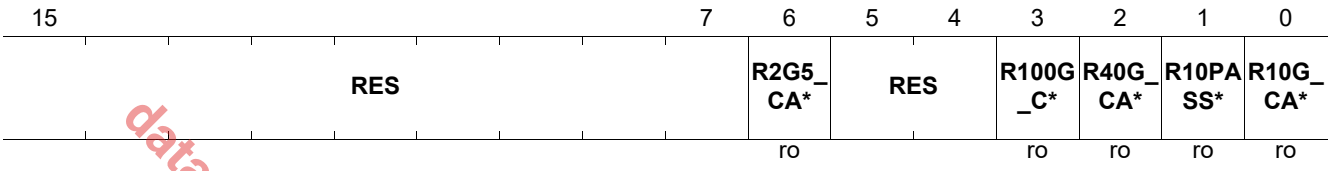

Field	Bits	Type	Description
R2G5_CAPABLE	6	RO	**2G5 Capable** This bit is always set to 1_B because the PCS is capable of operating at 2.5 Gbps.
R100G_CAPABLE	3	RO	**100G Capable** 0_B PCS is not capable of operating at 100 Gbps. 1_B PCS is capable of operating at 100 Gbps.
R40G_CAPABLE	2	RO	**40G Capable** 0_B PCS is not capable of operating at 40 Gbps. 1_B PCS is capable of operating at 40 Gbps.
R10PASS_TS_2BASE_TL	1	RO	**10PASS-TS/2BASE-TL Capable** 0_B PCS is not capable of operating as the 10P/2B PCS. 1_B PCS is capable of operating as the 10P/2B PCS.
R10G_CAPABLE	0	RO	**10G Capable** 0_B PCS is not capable of operating at 10 Gbps. 1_B PCS is capable of operating at 10 Gbps.

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

PCS Devices in Package 1 (Register 3.5)

IEEE Standard Register=3.5

PCS_DIP1 **Reset Value**

PCS Devices in Package 1 (Register 3.5) **$008B_H$**

15	12	11	10	9	8	7	6	5	4	3	2	1	0
RES		SEPARAT*	SEP_PMA*	SEPARAT*	SEPARAT*	ANEG	TC	DTE_XS	PHY_XS	PCS	WIS_PRE*	PMD_PMA	CL22
ro		ro	ro	ro	ro	ro	ro	ro	ro	ro	ro	ro	ro

data sheet are Not Recommended for New Designs (NRND)
The product(s) mentioned in this

Field	Bits	Type	Description
RES	15:12	RO	**Reserved** Ignore on read
SEPARATED_PMA_4	11	RO	**Separate PMA (4)** 0_B Separate PMA (4) not present in package 1_B Separate PMA (4) present in package
SEP_PMA_3	10	RO	**Separate PMA (3)** 0_B Separate PMA (3) not present in package 1_B Separate PMA (3) present in package
SEPARATED_PMA_2	9	RO	**Separate PMA (2)** 0_B Separate PMA (2) not present in package 1_B Separate PMA (2) present in package
SEPARATED_PMA_1	8	RO	**Separate PMA (1)** 0_B Separate PMA (1) not present in package 1_B Separate PMA (1) present in package
ANEG	7	RO	**Auto-Negotiation Present** 0_B Auto-negotiation not present in package 1_B Auto-negotiation present in package
TC	6	RO	**TC Present** 0_B TC not present in package 1_B TC present in package
DTE_XS	5	RO	**DTE XS Present** 0_B DTE XS not present in package 1_B DTE XS present in package
PHY_XS	4	RO	**PHY XS Present** 0_B PHY XS not present in package 1_B PHY XS present in package
PCS	3	RO	**PCS Present** 0_B PCS not present in package 1_B PCS present in package
WIS_PRESENT	2	RO	**WIS Present** 0_B WIS not present in package 1_B WIS present in package

Field	Bits	Type	Description (cont'd)
PMD_PMA	1	RO	**PMD/PMA Present** 0_B PMA/PMD not present in package 1_B PMA/PMD present in package
CL22	0	RO	**Clause 22 Registers Present** 0_B Clause 22 registers not present in package 1_B Clause 22 registers present in package


The product (or products) mentioned in this data sheet are Not Recommended for New Designs (NRND)

PCS Devices in Package 2 (Register 3.6)

IEEE Standard Register=3.6

PCS_DIP2 **Reset Value**

PCS Devices in Package 2 (Register 3.6) **$C000_H$**

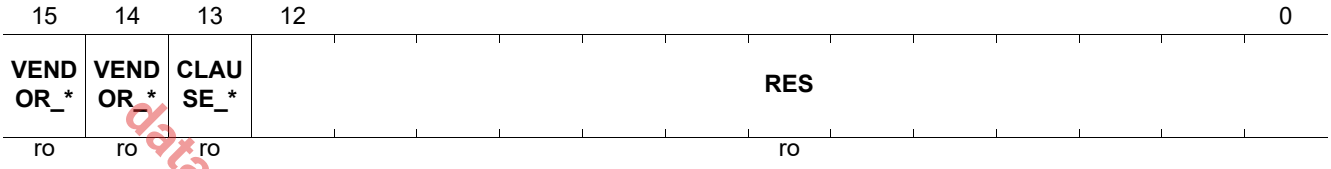

Field	Bits	Type	Description
VENDOR_SPECIFIC_DEVICE_2	15	RO	**Vendor-specific Device 2** 0_B Vendor-specific device 2 not present in package 1_B Vendor-specific device 2 present in package
VENDOR_SPECIFIC_DEVICE_1	14	RO	**Vendor-specific Device 1** 0_B Vendor-specific device 1 not present in package 1_B Vendor-specific device 1 present in package
CLAUSE_22_EXTENSION	13	RO	**Clause 22 Extension** 0_B Clause 22 extension not present in package 1_B Clause 22 extension present in package
RES	12:0	RO	**Reserved** Ignore on read.


data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

PCS Control 2 (Register 3.7)

IEEE Standard Register=3.7

PCS_CTRL2 **Reset Value**

PCS Control 2 (Register 3.7) **$000A_H$**



Field	Bits	Type	Description
PCS_TYPE_SEL	3:0	RW	**PCS Type Selection** 0000_B Not supported, defaults to 2.5 Gbps 0001_B Not supported, defaults to 2.5 Gbps 0010_B Not supported, defaults to 2.5 Gbps 0011_B Not supported, defaults to 2.5 Gbps 0100_B Not supported, defaults to 2.5 Gbps 0101_B Not supported, defaults to 2.5 Gbps 0110_B Not supported, defaults to 2.5 Gbps 0111_B Not supported, defaults to 2.5 Gbps 1000_B Reserved 1001_B Not supported, defaults to 2.5 Gbps 1010_B Select 2.5 Gbps PCS type (Default) 1011_B Not supported, defaults to 2.5 Gbps 1100_B Not supported, defaults to 2.5 Gbps 1101_B Not supported, defaults to 2.5 Gbps 1110_B Reserved 1111_B Reserved

data sheet are Not Recommended for New Designs (NRND)
The product(or products)mentioned in this

PCS Status 2 (Register 3.8)

IEEE Standard Register=3.8

PCS_STAT2 **Reset Value**

PCS Status 2 (Register 3.8) **9000_H**

15	14	13	12	11	10	9	6	5	4	3	2	1	0
DEVICE_PRESENT		RES	R2G5_CA*	TX_FAULT	RX_FAULT	RES		R100GBA*	R40GBAS*	R10GBAS*	R10GBAS*	R10GBAS*	R10GBAS*
ro			ro	ro	ro			ro	ro	ro	ro	ro	ro

Field	Bits	Type	Description
DEVICE_PRESENT	15:14	RO	**Device Present** 00_B No device responding at this address 01_B No device responding at this address 10_B Device responding at this address 11_B No device responding at this address
R2G5_CAPABLE	12	RO	**2G5BASE-T Capable** 0_B PCS is not able to support 2.5GBASE-T PCS type. 1_B PCS is able to support 2.5GBASE-T PCS type.
TX_FAULT	11	RO	**Transmit Fault** 0_B No fault condition on transmit path 1_B Fault condition on transmit path
RX_FAULT	10	RO	**Receive Fault** 0_B No fault condition on receive path 1_B Fault condition on receive path
R100GBASE_R_CAPABLE	5	RO	**100GBASE-R Capable** 0_B PCS is not able to support 100GBASE-R PCS type. 1_B PCS is able to support 100GBASE-R PCS type.
R40GBASE_R_CAPABLE	4	RO	**40GBASE-R Capable** 0_B PCS is not able to support 40GBASE-R PCS type. 1_B PCS is able to support 40GBASE-R PCS type.
R10GBASE_T_CAPABLE	3	RO	**10GBASE-T Capable** 0_B PCS is not able to support 10GBASE-T PCS type. 1_B PCS is able to support 10GBASE-T PCS type.
R10GBASE_W_CAPABLE	2	RO	**10GBASE-W Capable** 0_B PCS is not able to support 10GBASE-W PCS type. 1_B PCS is able to support 10GBASE-W PCS type.
R10GBASE_X_CAPABLE	1	RO	**10GBASE-X Capable** 0_B PCS is not able to support 10GBASE-X PCS type. 1_B PCS is able to support 10GBASE-X PCS type.
R10GBASE_R_CAPABLE	0	RO	**10GBASE-R Capable** 0_B PCS is not able to support 10GBASE-R PCS types. 1_B PCS is able to support 10GBASE-R PCS types.


data sheet are Not Recommended for New Designs (NURND)
The product (or products) mentioned in this

PCS Package Identifier 1 (Register 3.14)

IEEE Standard Register=3.14

PCS_PACKID1 **Reset Value**

PCS Package Identifier 1 (Register 3.14) **$C133_H$**

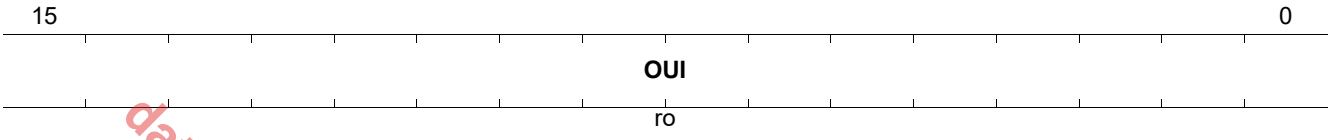

Field	Bits	Type	Description
OUI	15:0	RO	**Organizationally Unique Identifier Bits 3:18**


data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

PCS Package Identifier 2 (Register 3.15)

IEEE Standard Register=3.15

PCS_PACKID2 **Reset Value**

PCS Package Identifier 2 (Register 3.15) **5400_H**

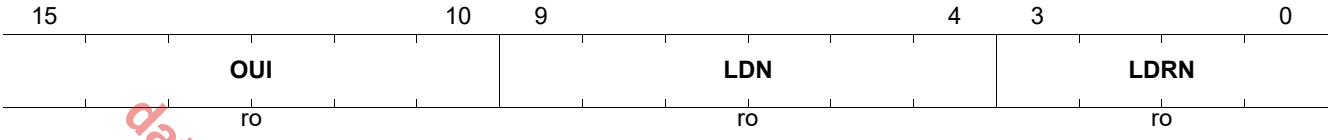

Field	Bits	Type	Description
OUI	15:10	RO	**Organizationally Unique Identifier Bits 19:24**
LDN	9:4	RO	**Device Number** Specifies the device number[1)] to distinguish between several different products.
LDRN	3:0	RO	**Device Revision Number** Specifies the device revision number to distinguish between several versions of this device.

1) For the device specific reset value, see the Product and Package Naming table in the **Product Ordering Information** chapter.


data sheet are Not Recommended for New Designs (NRND)
The product(s) mentioned in this

PCS EEE Capability (Register 3.20)

IEEE Standard Register=3.20

PCS_EEE_CAP **Reset Value**

PCS EEE Capability (Register 3.20) **0006_H**

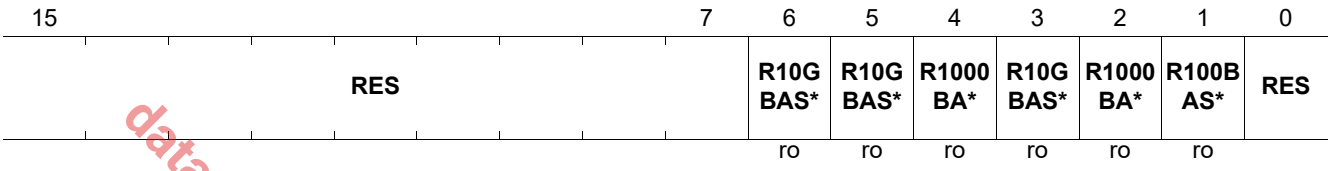

Field	Bits	Type	Description
R10GBASE_KR_EEE	6	RO	**10GBASE-KR EEE** 0_B EEE is not supported for 10GBASE-KR. 1_B EEE is supported for 10GBASE-KR.
R10GBASE_KX4_EEE	5	RO	**10GBASE-KX4 EEE** 0_B EEE is not supported for 10GBASE-KX4. 1_B EEE is supported for 10GBASE-KX4.
R1000BASE_KX_EEE	4	RO	**1000BASE-KX EEE** 0_B EEE is not supported for 1000BASE-KX. 1_B EEE is supported for 1000BASE-KX.
R10GBASE_T_EEE	3	RO	**10GBASE-T EEE** 0_B EEE is not supported for 10GBASE-T. 1_B EEE is supported for 10GBASE-T.
R1000BASE_T_EEE	2	RO	**1000BASE-T EEE** 0_B EEE is not supported for 1000BASE-T. 1_B EEE is supported for 1000BASE-T.
R100BASE_TX_EEE	1	RO	**100BASE-TX EEE** 0_B EEE is not supported for 100BASE-TX. 1_B EEE is supported for 100BASE-TX.

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this


EEE Control and Capability 2 (Register 3.21)

Read only. Write from the STA has no effect.

IEEE Standard Register=3.21

PCS_EEE_CAP2 **Reset Value**

EEE Control and Capability 2 (Register 3.21) **0001_H**

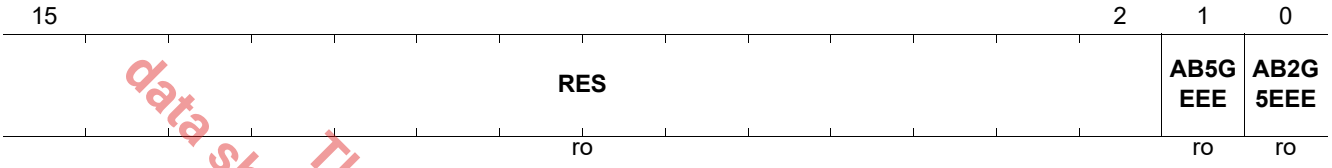

Field	Bits	Type	Description
RES	15:2	RO	**Reserved** Value always 0.
AB5GEEE	1	RO	**EEE Supported for 5GBASE-T** 0_B **UNABLE** EEE is not supported for 5GBASE-T. 1_B **ABLE** EEE is supported for 5GBASE-T.
AB2G5EEE	0	RO	**EEE Supported for 2.5GBASE-T** 0_B **UNABLE** EEE is not supported for 2.5GBASE-T. 1_B **ABLE** EEE is supported for 2.5GBASE-T.


data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

PCS EEE Status Register 1 (Register 3.22)

IEEE Standard Register=3.22

PCS_EEE_WAKERR **Reset Value**

PCS EEE Status Register 1 (Register 3.22) **0000_H**



Field	Bits	Type	Description
ERRCNT	15:0	RWSC	**EEE Wake Error Counter** This is a 16-bit saturating counter indicating the number of times the GPHY PHY fails to wake up within the EEE time. This counter is cleared upon read from the STA.


data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

BASE-R and 10GBASE-T PCS Status 1 (Register 3.32)

IEEE Standard Register=3.32

PCS_2G5_STAT1 **Reset Value**

BASE-R and 10GBASE-T PCS Status 1 (Register 3.32) **0000_H**

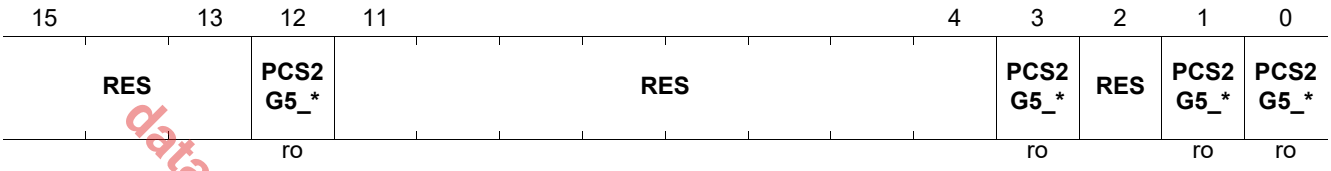


Field	Bits	Type	Description
PCS2G5_LINK_STATUS	12	RO	**BASE-R and 10GBase-T Rx Link Status** 0_B 2G5 PCS receive link down 1_B 2G5 PCS receive link up
PCS2G5_PAT_TEST_AB	3	RO	**PRBS9 Pattern Testing Ability** 0_B PCS is not able to support PRBS9 pattern testing. 1_B PCS is able to support PRBS9 pattern testing.
PCS2G5_HI_BER	1	RO	**PCS 2G5 High BER** This bit is a direct reflection of the state of the hi_lfer variable in 126.3.6.2.2 for 2.5GBASE-T. A latch high view of this status is reflected in MDIO register 3.33.14. 0_B The 64B/65B receiver detects a BER below 10^-4. 1_B The 64B/65B receiver detects a BER above or equal to 10^-4.
PCS2G5_BLO_LOCK	0	RO	**PCS 2G5 Block Lock** 0_B 64B/65B receiver does not have block lock. 1_B 64B/65B receiver has block lock.

data sheet are Not Recommended for New Designs (NRND)
The product (or product(s) mentioned in this

MULTIGBASE-T PCS Status 2 (Register 3.33)

PCS_2G5_STAT2 **Reset Value**

MULTIGBASE-T PCS Status 2 (Register 3.33) **0000_H**

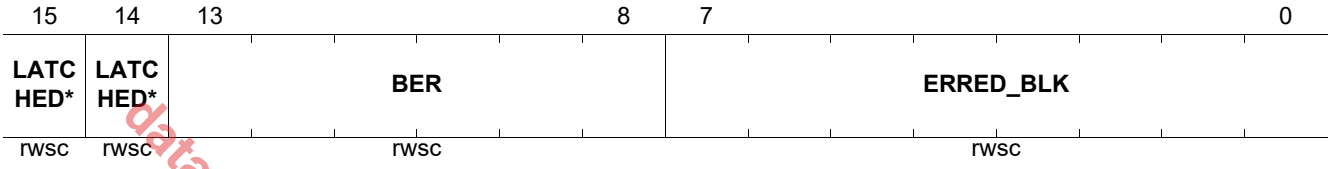

Field	Bits	Type	Description
LATCHED_BLOCK_LOCK	15	RWSC	**Latched Block Lock** 0_B PCS 2G5 does not have block lock. 1_B PCS 2G5 has block lock.
LATCHED_HIGH_BER	14	RWSC	**Latched High BER** 0_B PCS 2G5 did not report a high BER. 1_B PCS 2G5 reported a high BER.
BER	13:8	RWSC	**BER** BER counter
ERRED_BLK	7:0	RWSC	**Errored Blocks** Errored blocks counter

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

PCS TimeSync Capability Register (Register 3.1800)

IEEE Standard Register=3.1800

PCS_TIMESYNC_CAP **Reset Value**

PCS TimeSync Capability Register (Register 3.1800) **0000_H**



Field	Bits	Type	Description
TIMESYNC_TX_PATH_DATA_DELAY	1	RO	**TimeSync Transmit Path Data Delay** 0_B PCS does not provide information on transmit path data delay. For the GPHY, the value is always 0. 1_B PCS provides information on transmit path data delay in registers 3.1801 through 3.1804.
TIMESYNC_RX_PATH_DATA_DELAY	0	RO	**TimeSync Receive Path Data Delay** 0_B PCS does not provide information on receive path data delay. For the GPHY, the value is always 0. 1_B PCS provides information on receive path data delay in registers 3.1805 through 3.1808.

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

6.3 Standard Auto-Negotiation Registers for MMD=0x07

This register file contains the auto-negotiation registers for MMD device 0x07.

Table 33 Registers Overview- Standard Auto-Negotiation Registers

Register Short Name	Register Long Name	Reset Value
ANEG_CTRL	Auto-Negotiation Control (Register 7.0)	3000_H
ANEG_STAT	Auto-Negotiation Status (Register 7.1)	0008_H
ANEG_DEVID1	PHY Identifier 1 (Register 7.2)	$C133_H$
ANEG_DEVID2	PHY Identifier 2 (Register 7.3)	5400_H 1)
ANEG_DIP1	Device in Package 1 (Register 7.5)	$008B_H$
ANEG_DIP2	Device in Package 2 (Register 7.6)	$C000_H$
ANEG_PACKID1	AN Package Identifier (Register 7.14)	$C133_H$
ANEG_PACKID2	AN Package Identifier (Register 7.15)	5400_H 1)
ANEG_ADV	ANEG Adv. for GPHY (Register 7.16)	$9DE1_H$
ANEG_LP_BP_AB	AN Link Partner Base Page Ability (Register 7.19)	$0DE0_H$
ANEG_XNP_TX1	ANEG Local Dev XNP TX1 (Register 7.22)	0001_H
ANEG_XNP_TX2	ANEG Local Dev XNP TX2 (Register 7.23)	0000_H
ANEG_XNP_TX3	ANEG Local Dev XNP TX3 (Register 7.24)	0000_H
ANEG_LP_XNP_AB1	ANEG Link Partner XNP RX (Register 7.25)	0000_H
ANEG_LP_XNP_AB2	ANEG Link Partner XNP RX (Register 7.26)	0000_H
ANEG_LP_XNP_AB3	ANEG Link Partner XNP RX (Register 7.27)	0000_H
ANEG_MGBT_AN_CTRL	MULTI GBT AN Control (Register 7.32)	0082_H
ANEG_MGBT_AN_STA	MultiGBASE-T AN Status (Register 7.33)	0000_H
ANEG_EEE_AN_ADV1	EEE Advertisement 1 (Register 7.60)	0006_H
ANEG_EEE_AN_LPAB1	EEE Link Partner Ability 1 (Register 7.61)	0000_H
ANEG_EEE_AN_ADV2	EEE Advertisement 2 (Register 7.62)	0001_H
ANEG_EEE_LP_AB2	EEE Link Partner Ability 2 (Register 7.63)	0001_H
ANEG_MGBT_AN_CTRL2	MGBT ANEG Control 2 (Register 7.64)	0008_H

1) For the device specific reset value, see the Product and Package Naming table in the **Product Ordering Information** chapter.

Data sheet are Not Recommended for New Designs (NRND)
The product(s) mentioned in this

6.3.1 ANEG Register Descriptions

This section describes all the ANEG registers in detail.

Auto-Negotiation Control (Register 7.0)


The register controls the main function of auto-negotiation as defined in Clause 45. Refer to IEEE 802.3 45.2.7.1.

This register mirrors register STD_CTRL from Clause 22.

IEEE Standard Register=7.0

ANEG_CTRL **Reset Value**

Auto-Negotiation Control (Register 7.0) **3000_H**

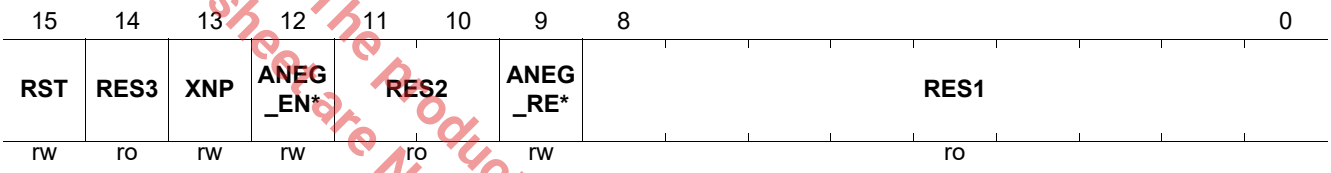

Field	Bits	Type	Description
RST	15	RW	**Reset** This bit resets the entire PHY to its default state. Active links are terminated. This is a self-clearing bit. The GPHY firmware sets the bit to 0 via the hardware when the reset is completed. 0_B **NORMAL** Normal GPHY operation 1_B **RESET** GPHY reset
RES3	14	RO	**Reserved** Value always 0, writes ignored.
XNP	13	RW	**Extended Next Page Control** 0_B **ZERO** Extended next page is disabled. 1_B **ONE** Extended next page is enabled.
ANEG_ENAB	12	RW	**Auto-Negotiation Enable** This bit enables the ANEG process to determine the link configuration. Bit 7.0.12 is a copy of bit 0.12 in register 0 (STD_CTRL). 0_B **ZERO** ANEG process is disabled. 1_B **ONE** ANEG process is enabled.
RES2	11:10	RO	**Reserved** Value always zero, writes ignored.
ANEG_RESTART	9	RW	**Restart Auto-Negotiation** The ANEG process is restarted by setting bit 7.0.9 to 1.Bit 7.0.9 is a mirror of bit 0.9 in register 0 (STD_CTRL). Completion of ANEG is indicated in bit 0.1.5 and 7.1.5. 0_B **ZERO** Normal operation 1_B **RESTART** Restarts ANEG process.
RES1	8:0	RO	**Reserved** Value always 0, writes ignored.

Data sheets are Not Recommended for New Designs (NRND)
The Product (or products) mentioned in this


Auto-Negotiation Status (Register 7.1)

All the bits in the ANEG_STA status register are read only and correspond to the outcome or current status of the auto-negotiation process.

IEEE Standard Register=7.1

ANEG_STAT **Reset Value**

Auto-Negotiation Status (Register 7.1) **0008_H**

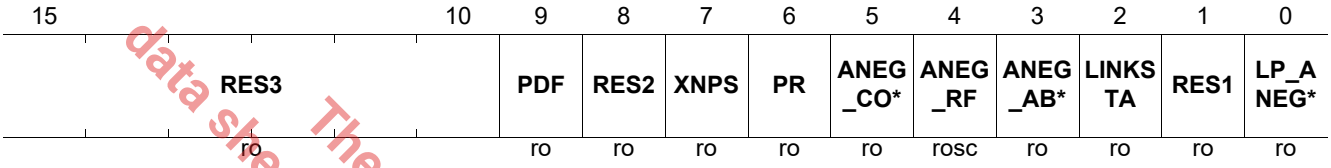

data sheet are Not Recommended for New Designs (NRND)
The product(or products) mentioned in this

Field	Bits	Type	Description
RES3	15:10	RO	**Reserved** Value always zero, writes ignored.
PDF	9	RO	**Parallel Detection Fault** 0_B **NOFAULT** No fault detected 1_B **FAULT** Fault detected via the parallel mechanism
RES2	8	RO	**Reserved** Value always 0, writes ignored.
XNPS	7	RO	**Extended Next Page Status** When set to 1_B, bit 7.1.7 indicates that both the GPHY and the link partner confirmed support for extended next page. When set to 0_B, bit 7.1.7 indicates that the extended next page feature is not used. 0_B **ZERO** Extended next page is not allowed. 1_B **ONE** Extended next page format is used.
PR	6	RO	**Page Received** The Page Received bit (7.1.6) is set to 1_B to indicate that a new link codeword was received and stored in the AN LP Base Page ability registers 7.19 or AN LP XNP ability registers 7.25 to 7.27. 0_B **ZERO** No page received 1_B **ONE** Page received
ANEG_COMPLETE	5	RO	**Auto-Negotiation Complete** When read as a 1, bit 7.1.5 indicates that the ANEG process was completed and that the contents of the ANEG registers 7.16 and 7.19 are valid. When read as a 0, bit 7.1.5 indicates that the ANEG process was not completed and that the contents of the 7.19, 7.22 through 7.27, and 7.33 registers are as defined by the current state of the ANEG protocol, or as written by manual configuration. 0_B **ZERO** ANEG process not completed 1_B **ONE** ANEG process completed


Field	Bits	Type	Description (cont'd)
ANEG_RF	4	ROSC	**Remote Fault** When read as 1, bit 7.1.4 indicates that a remote fault condition was detected. Bit 7.1.4 is a copy of bit 1.4 in register 1, device 0. 0_B **NORMAL** No remote fault condition detected 1_B **FAULT** Remote fault condition detected
ANEG_ABLE	3	RO	**Auto-Negotiation Ability** Bit 7.1.3 is a copy of bit 1.3 in register 1. This is the ANEG ability of the GPHY. 0_B **UNABLE** PHY is not able to perform ANEG. 1_B **ABLE** PHY is able to perform ANEG.
LINKSTA	2	RO	**Link Status** When read as 1_B, bit 7.1.2 indicates that the PMA/PMD determined that a valid link is established. This bit is a duplicate of the PMA/PMD link status bit in 1.1.2. This bit latches low so it does not represent the current status, but is used to indicate link drop since the last read from the management interface. Reading this bit from the MDIO resets the bit to the current value of the link. 0_B **DOWN** Link is down. 1_B **UP** Link is up.
RES1	1	RO	**Reserved** Value always 0, write ignored.
LP_ANEG_ABLE	0	RO	**Link Partner Auto-Negotiation Ability** 0_B **UNABLE** Link partner is not capable of ANEG. 1_B **ABLE** Link partner is capable of ANEG.

data sheet are Not Recommended for New Designs (NRND)
The product(s) mentioned in this

PHY Identifier 1 (Register 7.2)

ANEG_DEVID1 **Reset Value**

PHY Identifier 1 (Register 7.2) **C133$_H$**



Field	Bits	Type	Description
OUI	15:0	RO	**Organizationally Unique Identifier**

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this


PHY Identifier 2 (Register 7.3)

Organizationally Unique Identifier

IEEE Standard Register=7.3

ANEG_DEVID2 **Reset Value**

PHY Identifier 2 (Register 7.3) **5400_H**



Field	Bits	Type	Description
OUI	15:10	RO	**Organizationally Unique Identifier**
LDN	9:4	RO	**Device Number** Specifies the device number[1)] to distinguish between several different products.
LDRN	3:0	RO	**Device Revision Number** Specifies the device revision number[1)] to distinguish between several versions of this device.

1) For the device specific reset value, see the Product and Package Naming table in the **Product Ordering Information** chapter.

data sheet are Not Recommended for New Designs (NRND)
The product(s) mentioned in this

Device in Package 1 (Register 7.5)

IEEE Standard Register=7.5

ANEG_DIP1 **Reset Value**

Device in Package 1 (Register 7.5) **$008B_H$**

15	12	11	10	9	8	7	6	5	4	3	2	1	0
RES		PMA4	PMA3	PMA2	PMA1	ANEG	TC	DTEXS	PHYXS	PCS	WIS	PMAPMD	CL22
ro		ro	ro	ro	ro	ro	ro	ro	ro	ro	ro	ro	ro

Field	Bits	Type	Description
RES	15:12	RO	**Reserved** Ignore on read.
PMA4	11	RO	**Separate PMA4 Present in Package** 0_B **ABSENT** Separate PMA4 not present in package 1_B **PRESENT** Separate PMA4 present in package
PMA3	10	RO	**Separate PMA3 Present in Package** 0_B **ABSENT** Separate PMA3 not present in package 1_B **PRESENT** Separate PMA3 present in package
PMA2	9	RO	**Separate PMA2 Present in Package** 0_B **ABSENT** Separate PMA2 not present in package 1_B **PRESENT** Separate PMA2 present in package
PMA1	8	RO	**Separate PMA1 Present in Package** 0_B **ABSENT** Separate PMA1 not present in package 1_B **PRESENT** Separate PMA1 present in package
ANEG	7	RO	**Auto-Negotiation Present in Package** 0_B **ABSENT** ANEG not present in package 1_B **PRESENT** ANEG present in package
TC	6	RO	**TC Present in Package** 0_B **ABSENT** TC registers not present in package 1_B **PRESENT** TC registers present in package
DTEXS	5	RO	**DTE XS Present in Package** 0_B **ABSENT** DTE XS registers not present in package 1_B **PRESENT** DTE XS registers present in package
PHYXS	4	RO	**PHYXS Present in Package** 0_B **ABSENT** PHYXS registers not present in package 1_B **PRESENT** PHYXS registers present in package
PCS	3	RO	**PCS Present in Package** 0_B **ABSENT** PCS registers not present in package 1_B **PRESENT** PCS registers present in package
WIS	2	RO	**WIS Present in Package** 0_B **ABSENT** WIS registers present in package 1_B **PRESENT** WIS registers present in package

data sheet are Not Recommended for New Designs (NRND)
The product(s) mentioned in this

Field	Bits	Type	Description (cont'd)
PMAPMD	1	RO	**PMA PMD Present in Package** 0_B **ABSENT** PMA PMD registers not present in package 1_B **PRESENT** PMA PMD registers present in package
CL22	0	RO	**Clause 22 Register Present in Package** 0_B **ABSENT** Clause 22 registers no present in package 1_B **PRESENT** Clause 22 registers present in package


The product (or products) mentioned in this data sheet are Not Recommended for New Designs (NRND)

Device in Package 2 (Register 7.6)

IEEE Standard Register=7.6

ANEG_DIP2 **Reset Value**

Device in Package 2 (Register 7.6) **$C000_H$**

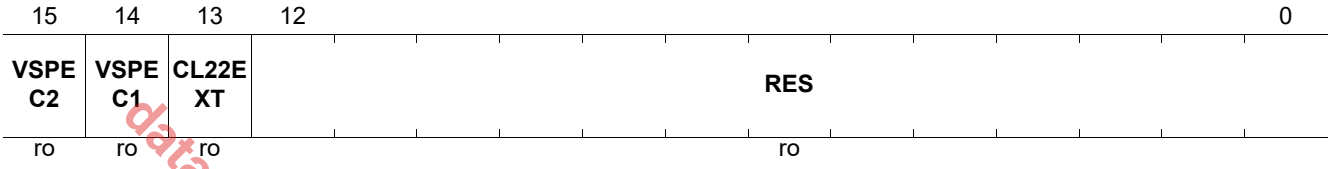

Field	Bits	Type	Description
VSPEC2	15	RO	**Vendor Specific Device 2 Present in Package** 0_B **ABSENT** Vendor Specific Device 2 not present in package 1_B **PRESENT** Vendor Specific Device 2 present in package
VSPEC1	14	RO	**Vendor Specific Device 1 Present in Package** 0_B **ABSENT** Vendor Specific Device 1 not present in package 1_B **PRESENT** Vendor Specific Device 1 present in package
CL22EXT	13	RO	**Clause 22 Extension Present in Package** 0_B **ABSENT** Clause 22 extension not present in package 1_B **PRESENT** Clause 22 extension present in package
RES	12:0	RO	**Reserved** Ignore on read.


data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

AN Package Identifier (Register 7.14)

IEEE Standard Register=7.14

ANEG_PACKID1 **Reset Value**

AN Package Identifier (Register 7.14) **C133$_H$**



Field	Bits	Type	Description
OUI	15:0	RO	**Organizationally Unique Identifier Bits 3:18**


data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

AN Package Identifier (Register 7.15)

IEEE Standard Register=7.15

ANEG_PACKID2 **Reset Value**

AN Package Identifier (Register 7.15) **5400_H**



Field	Bits	Type	Description
OUI	15:10	RO	**Organizationally Unique Identifier Bits 19:24**
LDN	9:4	RO	**Device Number** Specifies the device number[1)] to distinguish between several different products.
LDRN	3:0	RO	**Device Revision Number** Specifies the device revision number[1)] to distinguish between several versions of this device.

1) For the device specific reset value, see the Product and Package Naming table in the **Product Ordering Information** chapter.

data sheet are Not Recommended for New Designs (NRND)
The product(s) mentioned in this


ANEG Adv. for GPHY (Register 7.16)

This register is a copy of the ANEG advertisement register (Register 4). A read to the AN advertisement register (7.16) reports the value of the ANEG advertisement register (Register 4). Writes to the AN advertisement register (7.16) cause a write to occur to the ANEG advertisement register (Register 4).

IEEE Standard Register=7.16

ANEG_ADV **Reset Value**

ANEG Adv. for GPHY (Register 7.16) **$9DE1_H$**

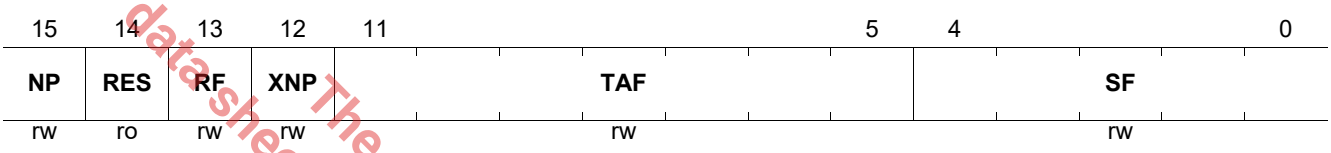

datasheet are not Recommended for New Designs (NRND)
The product (or products) mentioned in this

Field	Bits	Type	Description
NP	15	RW	**Next Page Able** 0_B **INACTIVE** No next page allowed. 1_B **ACTIVE** Additional next page(s) to follow.
RES	14	RO	**Reserved** Write as zero, ignore on read.
RF	13	RW	**Remote Fault** The remote fault bit allows indication of a fault to the link partner. Refer to IEEE 802.3 28.2.1.2.4.
XNP	12	RW	**Transmission of Extended Next Pages** Indicates that the GPHY is able to transmit extended next pages. 0_B **UNABLE** GPHY is XNP unable. 1_B **ABLE** GPHY is XNP able.
TAF	11:5	RW	**Technology Ability Field** The technology ability field is an 8-bit wide field containing information indicating supported technologies. The GPHY supports 10BASE-T (half- and full-duplex), 100BASE-TX (half- and full-duplex), and both symmetric and asymmetric PAUSE. 40_H **PS_ASYM** Advertises asymmetric pause 20_H **PS_SYM** Advertises symmetric pause 10_H **DBT4** Advertises 100BASE-T4 08_H **DBT_FDX** Advertises 100BASE-TX full-duplex 04_H **DBT_HDX** Advertises 100BASE-TX half-duplex 02_H **XBT_FDX** Advertises 10BASE-T full-duplex 01_H **XBT_HDX** Advertises 10BASE-T half-duplex
SF	4:0	RW	**Selector Field** This field is always set to 00001_B because the GPHY only supports the 802.3 Ethernet standard. 00001_B**IEEE8023** IEEE 802.3 technology.

AN Link Partner Base Page Ability (Register 7.19)


Register 7.19 is a copy of register 5 from Clause 28. It contains the Base Page received from the link partner.

All of the bits in the AN LP Base Page Ability register are read only.

IEEE Standard Register=7.19

ANEG_LP_BP_AB **Reset Value**

AN Link Partner Base Page Ability (Register 7.19) **$0DE0_H$**



Field	Bits	Type	Description
NP	15	RO	**Link Partner Next Page** Next page request indication from the link partner. 0_B **INACTIVE** No next page to follow 1_B **ACTIVE** Additional next page to follow
ACK	14	RO	**Link Partner Acknowledge** Acknowledgment indication from the link partner's link code word. 0_B **INACTIVE** Device did not successfully receive its link partner's link code word. 1_B **ACTIVE** Device successfully received its link partner's link code word.
RF	13	RO	**Link Partner Remote Fault** Remote fault indication from the link partner. 0_B **NONE** Remote fault is not indicated by the link partner. 1_B **FAULT** Remote fault is indicated by the link partner.
XNP	12	RO	**Link Partner XNP Ability** 0_B **UNABLE** Link partner is not XNP able. 1_B **ABLE** Link partner is XNP able.
TAF	11:5	RO	**Technology Ability Field** These bits indicate the link partner's supported technologies received in the Base Page. 40_H **PS_ASYM** Advertises asymmetric pause 20_H **PS_SYM** Advertises symmetric pause 10_H **DBT4** Advertises 100BASE-T4 08_H **DBT_FDX** Advertises 100BASE-TX full-duplex 04_H **DBT_HDX** Advertises 100BASE-TX half-duplex 02_H **XBT_FDX** Advertises 10BASE-T full-duplex 01_H **XBT_HDX** Advertises 10BASE-T half-duplex

data sheet are Not Recommended for New Designs (NRND)
The product(s) mentioned in this


Field	Bits	Type	Description (cont'd)
SF	4:0	RO	**Link Partner Selector Field** This selector field represents one of the 32 possible messages with encoding definitions defined in IEEE 802.3 Annex 28A. 00_H Reserved 01_H IEEE 802.3 02_H IEEE 802.9 ISLAN-16T 03_H IEEE 802.5 04_H IEEE 1394 05_H Reserved ... $1F_H$ Reserved

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

ANEG Local Dev XNP TX1 (Register 7.22)

ANEG_XNP_TX1 **Reset Value**

ANEG Local Dev XNP TX1 (Register 7.22) **0001_H**



data sheet are Not Recommended for New Designs (NRND)
The product(or products) mentioned in this

Field	Bits	Type	Description
NP	15	RW	**Next Page** When the NP bit is set, the GPHY requests to transmit one additional page. The next page transmission ends when both ends of a link segment set their next page bits to logic 0, indicating that neither has anything additional to transmit. 0_B **INACTIVE** No next page to follow. 1_B **ACTIVE** Additional next page(s) to follow.
RES	14	RO	**Reserved** Write as 0, ignore on read.
MP	13	RW	**Message Page** Message Page (MP) is used by the next page function to differentiate a MP from an UP. Only MPs are used by the GPHY. 0_B **UNFOR** Unformatted Page 1_B **MESSG** Message Page
ACK2	12	RW	**Acknowledge 2** Not used during GPHY ANEG. 0_B **INACTIVE** Device does not comply with message. 1_B **ACTIVE** Device complies with message.
TOGG	11	RO	**Toggle** The Toggle bit is used to ensure proper synchronization between the GPHY and the link partner. 0_B **ZERO** Previous value of the Tx LCW was 1_B. 1_B **ONE** Previous value of the Tx LCW was 0_B.

Field	Bits	Type	Description (cont'd)
MCF	10:0	RW	**Message Code Field** When the Message Page bit is set to 1_B (7.16.1), this field is the Message Code Field of a message page used in a next page exchange. The message codes are described in IEEE 802.3 Appendix 28C. This is used to indicate the type of message in UCF1 and UCF2. 00_H Reserved 01_H Null message 02_H One Unformatted Page (UP) with TAF follows 03_H Two UPs with TAF follows 04_H Remote fault details message 05_H OUI message 06_H PHY ID message 07_H 100BASE-T2 message 08_H 1000BASE-T message 09_H MULTIGBASE-T message $0A_H$ EEE technology capability follows in next UP $0B_H$ OUI XNP

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this


ANEG Local Dev XNP TX2 (Register 7.23)

Unformatted code field 1 contains seed information and advertises support of 1 GBT full-duplex and half-duplex. Refer to 28.2.3.4.

IEEE Standard Register=7.23

ANEG_XNP_TX2 **Reset Value**

ANEG Local Dev XNP TX2 (Register 7.23) **0000_H**



Field	Bits	Type	Description
UCF1	15:0	RW	**Unformatted Code Field 1** Transmits the master-slave seed bit to facilitate ANEG resolution, port type, and duplex capability.

data sheet are Not Recommended for New Designs (NRND)
The product(s) or products(s) mentioned in this

ANEG Local Dev XNP TX3 (Register 7.24)


Unformatted code field 2 - Register 7.24

Refer to 28.2.3.4.

IEEE Standard Register=7.24

ANEG_XNP_TX3 **Reset Value**

ANEG Local Dev XNP TX3 (Register 7.24) **0000_H**



Field	Bits	Type	Description
UCF2	15:0	RW	**Unformatted Code Field 2** 2.5 GBASE-T ability is advertised by default.


data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

ANEG Link Partner XNP RX (Register 7.25)

IEEE Standard Register=7.25

ANEG_LP_XNP_AB1 **Reset Value**

ANEG Link Partner XNP RX (Register 7.25) **0000_H**



data sheet are Not Recommended for New Designs (NRND)
The product (or product(s) mentioned in this


Field	Bits	Type	Description
NP	15	RO	**Link Partner Next Page** Refer to 28.2.3.4.3. The NP bit is used by the next page function to indicate whether or not this is the last next page to be transmitted. 0_B **INACTIVE** Last page 1_B **ACTIVE** Additional next page(s) to follow
ACK	14	RO	**Link Partner Acknowledge** As defined in 28.2.1.2.5. The Acknowledge (Ack) bit is used by the ANEG function to indicate that the GPHY successfully received its link partner's link codeword.
MP	13	RO	**Link Partner Message Page** Indicates that the content of MCF is either an unformatted page or a formatted message. 0_B **UNFOR** Unformatted page 1_B **MESSG** Message page
ACK2	12	RO	**Link Partner Acknowledge 2** 0_B **INACTIVE** Device is unable to comply with message. 1_B **ACTIVE** Device complies with message.
TOGG	11	RO	**Link Partner Toggle** This bit is set to the opposite of the TOGG bit in the previous page. 0_B **ZERO** Previous value of the TX LCW was 1_B. 1_B **ONE** Previous value of the TX LCW was 0_B.
MCF	10:0	RO	**Link Partner Message Code Field** This field indicates the type of Message Code. 009_H **MC_2G5BT** Message code for 2.5GBASE-T

ANEG Link Partner XNP RX (Register 7.26)

IEEE Standard Register=7.26

ANEG_LP_XNP_AB2 **Reset Value**

ANEG Link Partner XNP RX (Register 7.26) **0000_H**



Field	Bits	Type	Description
UCF1	15:0	RO	**Unformatted Code Field 1** Refer to 28.2.3.4.


data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

ANEG Link Partner XNP RX (Register 7.27)

IEEE Standard Register=7.27

ANEG_LP_XNP_AB3 **Reset Value**

ANEG Link Partner XNP RX (Register 7.27) **0000_H**



Field	Bits	Type	Description
UCF2	15:0	RO	**Unformatted Code Field 2** Refer to 28.2.3.4.

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

MULTI GBT AN Control Register (Register 7.32)

This register advertises the GPHY capabilities.

IEEE Standard Register=7.32

ANEG_MGBT_AN_CTRL **Reset Value**

MULTI GBT AN Control Register (Register 7.32) **0082_H**

15	14	13	12	11 … 9	8	7	6	5	4 … 3	2	1	0
MS_MAN_*	MSCV	PT	AB_10GBT	RES2	AB_5GBT	AB_2G5BT	FR_5GBT	FR_2G5BT	RES1	LDPMA	FR	LDL
rw	rw	rw	ro	ro	ro	rw	ro	rw	ro	rw	rw	rw

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

Field	Bits	Type	Description
MS_MAN_EN	15	RW	**Master Slave Manual Config Enable** 0_B **ANEG** ANEG is used to determine the master-slave selection. 1_B **MAN** Manual configuration. The MSCV bit determines the master-slave selection.
MSCV	14	RW	**Master Slave Config Value** 0_B **SLAVE** Manual set to SLAVE 1_B **MASTER** Manual set to MASTER
PT	13	RW	**Port Type** 0_B **MASTER** Preference as Master - single port device 1_B **SLAVE** Preference as Slave - multi-port device
AB_10GBT	12	RO	**10GBASE-T Ability** Not supported. Value always 0.
RES2	11:9	RO	**Reserved** Value always 0, writes ignored.
AB_5GBT	8	RO	**5GBASE-T Ability** Not supported by the GPHY. 0_B **UNABLE** Do not advertise PHY as 5GBASE-T capable. 1_B **ABLE** Advertises PHY as 5GBASE-T capable. Not supported.
AB_2G5BT	7	RW	**2.5GBASE-T Ability** 0_B **UNABLE** Do not advertise PHY as 2.5GBASE-T capable. 1_B **ABLE** Advertises PHY as 2.5GBASE-T capable.
FR_5GBT	6	RO	**5GBASE-T Fast Retrain Ability** Not supported by GPHY. 0_B **UNABLE** Do not advertise PHY as 5GBASE-T fast retrain able. 1_B **ABLE** Advertises PHY as 5GBASE-T fast retrain capable. Not supported.
FR_2G5BT	5	RW	**2.5GBASE-T Fast Retrain Ability** 0_B **UNABLE** Do not advertise PHY as 2.5G fast retrain able. 1_B **ABLE** Advertises PHY as 2.5G fast retrain able.
RES1	4:3	RO	**Reserved** Value always 0, writes ignored.

Field	Bits	Type	Description (cont'd)
LDPMA	2	RW	**GPHY PMA Training Reset Request** When this bit is set to 1_B, the GPHY expects the link partner to reset the PMA training PRBS for every PMA training frame. When this bit is set to 0_B, the GPHY expects the link partner to run the PMA training PRBS continuously through every PMA training frame.
FR	1	RW	**Fast Retrain Ability**
LDL	0	RW	**GPHY Loop Timing Ability**


The product (or products) mentioned in this data sheet are Not Recommended for New Designs (NRND)

MultiGBASE-T AN Status Register (Register 7.33)

IEEE Standard Register=7.33

ANEG_MGBT_AN_STA **Reset Value**

MultiGBASE-T AN Status register (Register 7.33) **0000_H**

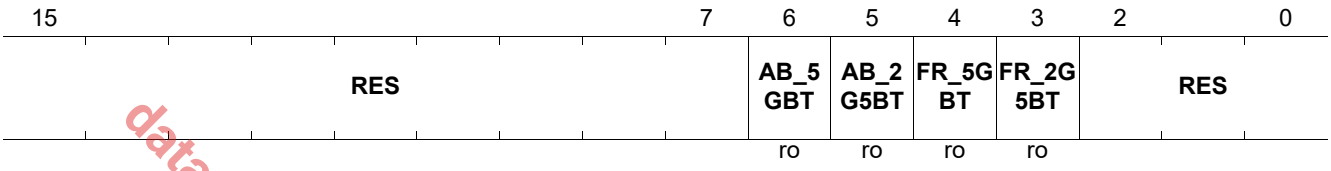

Field	Bits	Type	Description
AB_5GBT	6	RO	**5GBASE-T Ability of Link Partner** This bit is only valid when the link is established and ANEG completed. 0_B **UNABLE** Link partner is not capable of 5GBASE-T. 1_B **ABLE** Link partner is capable of 5GBASE-T.
AB_2G5BT	5	RO	**2.5GBASE-T Ability of Link Partner** This bit is only valid when the link is established and ANEG completed (bit 7.1.5 is set to 1_B). 0_B **UNABLE** Link partner is not capable of 2.5GBASE-T. 1_B **ABLE** Link partner is capable of 2.5GBASE-T.
FR_5GBT	4	RO	**5GBASE-T Fast Retrain Ability of Link Partner** This bit is only valid when the link is established and ANEG completed. 0_B **UNABLE** Link partner is not capable of 5GBASE-T fast retrain. 1_B **ABLE** Link partner is capable of 5GBASE-T fast retrain
FR_2G5BT	3	RO	**2.5GBASE-T Fast Retrain Ability of Link Partner** This bit is only valid when the link is established and ANEG completed (bit 7.1.5 is set to 1_B). 0_B **UNABLE** Link partner is not capable of 2.5GBASE-T fast retrain. 1_B **ABLE** Link partner is capable of 2.5GBASE-T fast retrain.

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

EEE Advertisement 1 (Register 7.60)

IEEE Standard Register=7.60

ANEG_EEE_AN_ADV1 **Reset Value**

EEE Advertisement 1 (Register 7.60) **0006_H**

15 … 7	6	5	4	3	2	1	0
RES	EEE_10GKR*	EEE_10GKX4*	EEE_1000BKX*	EEE_10GBT*	EEE_1000BT*	EEE_100BTX*	RES
	ro	ro	ro	ro	rw	rw	

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

Field	Bits	Type	Description
EEE_10GBKR	6	RO	**Support of 10GBASE-KR EEE** 0_B **DISABLED** This PHY mode is not supported for EEE. 1_B **ENABLE** This PHY mode is supported for EEE.
EEE_10GBKX4	5	RO	**Support of 10GBASE-KX4 EEE** 0_B **DISABLED** This PHY mode is not supported for EEE. 1_B **ENABLE** This PHY mode is supported for EEE.
EEE_1000BKX	4	RO	**Support of 1000BASE-KX EEE** 0_B **DISABLED** This PHY mode is not supported for EEE. 1_B **ENABLE** This PHY mode is supported for EEE.
EEE_10GBT	3	RO	**Support of 10GBASE-T EEE** 0_B **DISABLED** This PHY mode is not supported for EEE. 1_B **ENABLE** This PHY mode is supported for EEE.
EEE_1000BT	2	RW	**Support of 1000BASE-T EEE** 0_B **DISABLED** This PHY mode is not supported for EEE. 1_B **ENABLE** This PHY mode is supported for EEE.
EEE_100BTX	1	RW	**Support of 100BASE-TX EEE** 0_B **DISABLED** This PHY mode is not supported for EEE. 1_B **ENABLE** This PHY mode is supported for EEE.

EEE Link Partner Ability 1 (Register 7.61)

After the AN process is completed, this register reflects the contents of the link partner's EEE advertisement register. The definitions are the same as for the EEE AN advertisement 1 register.

IEEE Standard Register=7.61

All of the bits in the EEE LP ability 1 register are read only. A write operation to the EEE LP advertisement register has no effect.

ANEG_EEE_AN_LPAB1 **Reset Value**

EEE Link Partner Ability 1 (Register 7.61) **0000_H**

15 … 7	6	5	4	3	2	1	0
RES	EEE_10GKR*	EEE_10GKX4*	EEE_1000BKX*	EEE_10GBT*	EEE_1000BT*	EEE_100BTX*	RES
	ro	ro	ro	ro	ro	ro	

Field	Bits	Type	Description
EEE_10GBKR	6	RO	**Support of 10GBASE-KR EEE** 0_B **DISABLED** This PHY mode is not supported for EEE. 1_B **ENABLE** This PHY mode is supported for EEE.
EEE_10GBKX4	5	RO	**Support of 10GBASE-KX4 EEE** 0_B **DISABLED** This PHY mode is not supported for EEE. 1_B **ENABLE** This PHY mode is supported for EEE.
EEE_1000BKX	4	RO	**Support of 1000BASE-KX EEE** 0_B **DISABLED** This PHY mode is not supported for EEE. 1_B **ENABLE** This PHY mode is supported for EEE.
EEE_10GBT	3	RO	**Support of 10GBASE-T EEE** 0_B **DISABLED** This PHY mode is not supported for EEE. 1_B **ENABLE** This PHY mode is supported for EEE.
EEE_1000BT	2	RO	**Support of 1000BASE-T EEE** 0_B **DISABLED** This PHY mode is not supported for EEE. 1_B **ENABLE** This PHY mode is supported for EEE.
EEE_100BTX	1	RO	**Support of 100BASE-TX EEE** 0_B **DISABLED** This PHY mode is not supported for EEE. 1_B **ENABLE** This PHY mode is supported for EEE.

data sheet are Not Recommended for New Design (NRND)
The product (or products) mentioned in this


EEE Advertisement 2 (Register 7.62)

EEE advertisement 2 register is a continuation of EEE advertisement 1 register.

IEEE Standard Register=7.62

ANEG_EEE_AN_ADV2 **Reset Value**

EEE Advertisement 2 (Register 7.62) **0001_H**

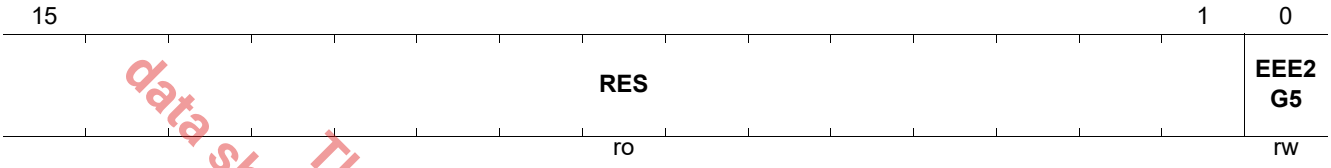

Field	Bits	Type	Description
RES	15:1	RO	**Reserved**
EEE2G5	0	RW	**Advertise 2.5GBASE-T EEE Capability** 0_B **DISABLED** This PHY mode does not advertise 2.5GBASE-T EEE. 1_B **ENABLE** This PHY mode advertises 2.5GBASE-T EEE.

data sheet are Not Recommended for New Designs (NRND)
The product(s) mentioned in this

EEE Link Partner Ability 2 (Register 7.63)


When the AN and training processes are complete, this register reflects the contents of the link partner's EEE advertisement 2 register.

IEEE Standard Register=7.63

All the bits in the EEE LP Ability 2 register are read-only. A write to the EEE LP Ability 2 register has no effect.

ANEG_EEE_LP_AB2 **Reset Value**

EEE Link Partner Ability 2 (Register 7.63) **0001_H**

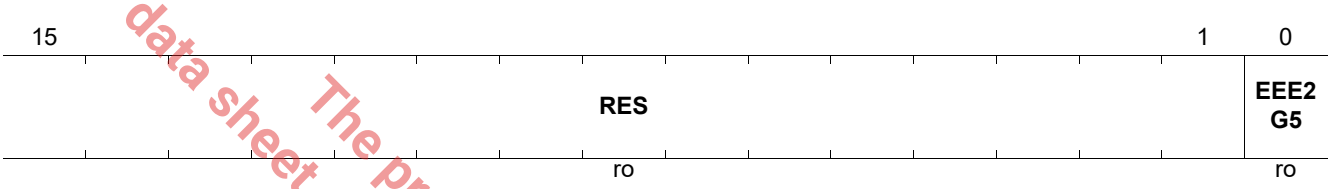

Field	Bits	Type	Description
RES	15:1	RO	**Reserved**
EEE2G5	0	RO	**Link Partner Advertised 2.5GBASE-T EEE Capability** 0_B **DISABLED** LP is not 2.5GBASE-T EEE capable. 1_B **ENABLE** LP is 2.5GBASE-T EEE capable.

data sheet are Not Recommended for New Designs (NRND)
The product(or products) mentioned in this

MGBT ANEG Control 2 (Register 7.64)

This register is an extension of the ANEG Control Register for Multi GBT. It is used for 2.5 G ANEG configuration.

IEEE Standard Register=7.64


Bit 7.64.3 is valid only when 7.32.5 is set to 1_B advertising fast retrain ability, and is used to request the link partner whether to initially reset the THP during fast retrain. THP Bypass Request is exchanged during link training, refer to 126.4.2.5.10.

When bit 7.64.3 is set to 0_B, the GPHY requests the link partner not to reset THP during fast retrain.

When bit 7.64.3 is set to 1_B, the GPHY requests the link partner to initially reset THP during fast retrain.

ANEG_MGBT_AN_CTRL2 **Reset Value**

MGBT ANEG Control 2 (Register 7.64) **0008_H**

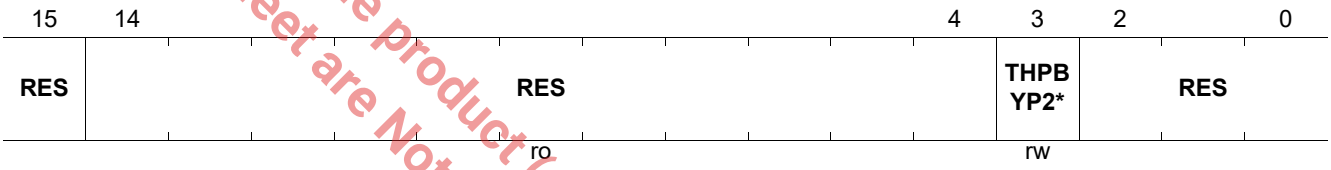

Field	Bits	Type	Description
RES	14:4	RO	**Reserved**
THPBYP2G5	3	RW	**THP Bypass During Fast Retrain** The GPHY requests a THP bypass during fast retrain. 0_B **NORST** GPHY requests the link partner NOT to initially reset THP during fast retrain. 1_B **RST** GPHY requests the link partner to initially reset THP during fast retrain.

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

6.4 Vendor Specific 1 Device Registers

This register file contains GPHY-specific registers for MMD=30 (decimal).

Table 34 Registers Overview- Vendor Specific 1 Device Registers

Register Short Name	Register Long Name	Reset Value
VSPEC1_LED0	Configuration for LED Pin 0 (Register 30.1)	0310_H
VSPEC1_LED1	Configuration for LED Pin 1 (Register 30.2)	0320_H
VSPEC1_LED2	Configuration for LED Pin 2 (Register 30.3)	0340_H
VSPEC1_TXS_SCL_OFFSET	PHY Transmit Amplitude Control Register (Register 30.8)	0000_H
VSPEC1_NBT_DS_CTRL	NBASE-T Downshift Control Register (Register 30.10)	0400_H
VSPEC1_NBT_DS_STA	NBASE-T Downshift Status Register (Register 30.11)	0000_H
VSPEC1_PM_CTRL	Packet Manager Control (Register 30.12)	3000_H
VSPEC1_TEMP_STA	Temperature Code (Register 30.14)	0000_H
VSPEC1_IMASK	VSPEC1 Interrupt Mask Register (Register 30.17)	0000_H
VSPEC1_ISTAT	VSPEC1 Interrupt Mask Register (Register 30.18)	0000_H
VSPEC1_LANE_ASP_MAP	ASP Mapping to Physical Lanes (Register 30.20)	$00E4_H$
VSPEC1_LOW_POWER_ENTRY_TIME	Time to Enter Low Power (Register 30.21)	0001_H
VSPEC1_FRCTL	Fast Retrain Control and Status (Register 30.22)	0000_H

Data sheet are Not Recommended for New Designs (NRND)
The product(or products) mentioned in this

6.4.1 VSPEC1 Register Descriptions

This section describes all the VSPEC1 registers in detail.

Configuration for LED Pin 0 (Register 30.1)

This register configures the behavior of the LED0 pin depending on predefined states or events the PHY entered into or raised. Since more than one event/state may be active at the same time, more than one function may apply at the same time. The priority from highest to lowest is given by the order: PULSE, BLINKS, BLINKF, and CON. The LED PULSE for the selected activity is only displayed for the link speed selected in CON. When CON is selected as NONE, no PULSE is displayed on the LED for any activity. To avoid the LED being constantly on when it is configured for pulsing alone, set the NO_CON bit in the PULSE field (bit 11).

IEEE Standard Register=30.1

VSPEC1_LED0 **Reset Value**

Configuration for LED Pin 0 (Register 30.1) **0310_H**



Field	Bits	Type	Description
BLINKS	15:12	RW	**Slow Blinking Configuration** The BLINKS field selects the PHY states where the LED blinks with the predefined slow frequency. Each bit mask indicates a link speed. Combinations of these bit masks are used to provide a combination of link speed states to enable the behavior. 0000_B**NONE** Not active 0001_B**LINK10** Blink when link is 10 Mbps. 0010_B**LINK100** Blink when link is 100 Mbps. 0100_B**LINK1000** Blink when link is 1000 Mbps. 1000_B**LINK2500** Blink when link is 2500 Mbps.
PULSE	11:8	RW	**Pulsing Configuration** The PULSE field is a mask field that combines certain events, such as TXACT|RXACT, to generate a pulse on the LED when such an event is detected. 0000_B**NONE** No pulsing 0001_B**TXACT** Transmit activity 0010_B**RXACT** Receive activity 0100_B**COL** Collision 1000_B**NO_CON** Constant on behavior is switched off.

Data sheet are Not Recommended for New Designs (NRND)
The Product(or products) mentioned in this

Field	Bits	Type	Description (cont'd)
CON	7:4	RW	**Constant On Configuration** The CON field selects the PHY states where the LED is constantly on. Each bit mask indicates a link speed. Combinations of these bit masks are used to provide a combination of link speed states to enable the behavior. 0000_B**NONE** Not active 0001_B**LINK10** On when link is 10 Mbps. 0010_B**LINK100** On when link is 100 Mbps. 0100_B**LINK1000** On when link is 1000 Mbps. 1000_B**LINK2500** On when link is 2500 Mbps.
BLINKF	3:0	RW	**Fast Blinking Configuration** The BLINKF field selects the PHY states where the LED blinks with the predefined fast frequency. Each bit mask indicates a link speed. Combinations of these bit masks are used to provide a combination of link speed states to enable the behavior. 0000_B**NONE** No active 0001_B**LINK10** Blink when Link is 10 Mbps. 0010_B**LINK100** Blink when Link is 100 Mbps. 0100_B**LINK1000** Blink when Link is 1000 Mbps. 1000_B**LINK2500** Blink when Link is 2500 Mbps.

data sheet are Not Recommended for New Designs (NRND)
The product(s) mentioned in this


Configuration for LED Pin 1 (Register 30.2)

Configuration register for LED pin 1

IEEE Standard Register=30.2

VSPEC1_LED1 **Reset Value**

Configuration for LED Pin 1 (Register 30.2) **0320_H**

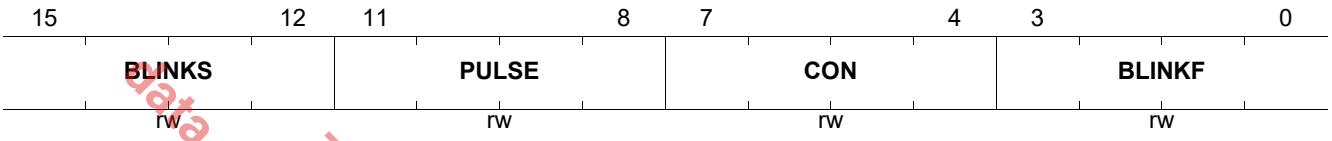

Data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

Field	Bits	Type	Description
BLINKS	15:12	RW	**Slow Blinking Configuration** The BLINKS field selects the PHY states where the LED blinks with the predefined slow frequency. Each bit mask indicates a link speed. Combinations of these bit masks are used to provide a combination of link speed states to enable the behavior. 0000_B**NONE** Not active 0001_B**LINK10** Blink when link is 10 Mbps. 0010_B**LINK100** Blink when link is 100 Mbps. 0100_B**LINK1000** Blink when link is 1000 Mbps. 1000_B**LINK2500** Blink when link is 2500 Mbps.
PULSE	11:8	RW	**Pulsing Configuration** The PULSE field is a mask field that combines certain events, such as TXACT|RXACT, to generate a pulse on the LED when such an event is detected. 0000_B**NONE** No pulsing 0001_B**TXACT** Transmit activity 0010_B**RXACT** Receive activity 0100_B**COL** Collision 1000_B**NO_CON** Constant on behavior is switched off.
CON	7:4	RW	**Constant On Configuration** The CON field selects the PHY states where the LED is constantly on. Each bit mask indicates a link speed. Combinations of these bit masks are used to provide a combination of link speed states to enable the behavior. 0000_B**NONE** Not active 0001_B**LINK10** On when link is 10 Mbps. 0010_B**LINK100** On when link is 100 Mbps. 0100_B**LINK1000** On when link is 1000 Mbps. 1000_B**LINK2500** On when link is 2500 Mbps.

Field	Bits	Type	Description (cont'd)
BLINKF	3:0	RW	**Fast Blinking Configuration** The BLINKF field selects the PHY states where the LED blinks with the predefined fast frequency. Each bit mask indicates a link speed. Combinations of these bit masks are used to provide a combination of link speed states to enable the behavior. 0000_B**NONE** Not active 0001_B**LINK10** Blink when link is 10 Mbps. 0010_B**LINK100** Blink when link is 100 Mbps. 0100_B**LINK1000** Blink when link is 1000 Mbps. 1000_B**LINK2500** Blink when link is 2500 Mbps.

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this


Configuration for LED Pin 2 (Register 30.3)

Configuration register for LED pin 2

IEEE Standard Register=30.3

VSPEC1_LED2 **Reset Value**

Configuration for LED Pin 2 (Register 30.3) **0340_H**



Data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

Field	Bits	Type	Description
BLINKS	15:12	RW	**Slow Blinking Configuration** The BLINKS field selects the PHY states where the LED blinks with the predefined slow frequency. Each bit mask indicates a link speed. Combinations of these bit masks are used to provide a combination of link speed states to enable the behavior. 0000_B**NONE** Not active 0001_B**LINK10** Blink when link is 10 Mbps. 0010_B**LINK100** Blink when link is 100 Mbps. 0100_B**LINK1000** Blink when link is 1000 Mbps. 1000_B**LINK2500** Blink when link is 2500 Mbps.
PULSE	11:8	RW	**Pulsing Configuration** The PULSE field is a mask field that combines certain events, such as TXACT|RXACT, to generate a pulse on the LED when such an event is detected. 0000_B**NONE** No pulsing 0001_B**TXACT** Transmit activity 0010_B**RXACT** Receive activity 0100_B**COL** Collision 1000_B**NO_CON** Constant on behavior is switched off.
CON	7:4	RW	**Constant On Configuration** The CON field selects the PHY states where the LED is constantly on. Each bit mask indicates a link speed. Combinations of these bit masks are used to provide a combination of link speed states to enable the behavior. 0000_B**NONE** Not active 0001_B**LINK10** On when link is 10 Mbps. 0010_B**LINK100** On when link is 100 Mbps. 0100_B**LINK1000** On when link is 1000 Mbps. 1000_B**LINK2500** On when link is 2500 Mbps.

Field	Bits	Type	Description (cont'd)
BLINKF	3:0	RW	**Fast Blinking Configuration** The BLINKF field selects the PHY states where the LED blinks with the predefined fast frequency. Each bit mask indicates a link speed. Combinations of these bit masks are used to provide a combination of link speed states to enable the behavior. 0000_B**NONE** Not Active 0001_B**LINK10** Blink when link is 10 Mbps. 0010_B**LINK100** Blink when link is 100 Mbps. 0100_B**LINK1000** Blink when link is 1000 Mbps. 1000_B**LINK2500** Blink when link is 2500 Mbps.

The product (or products) mentioned in this data sheet are Not Recommended for New Designs (NRND)


PHY Transmit Amplitude Control Register (Register 30.8)

This register adjusts the transmit amplitude of the PHY.

IEEE Standard Register=30.8

VSPEC1_TXS_SCL_OFFSET **Reset Value**

PHY Transmit Amplitude Control Register (Register 30.8) **0000_H**

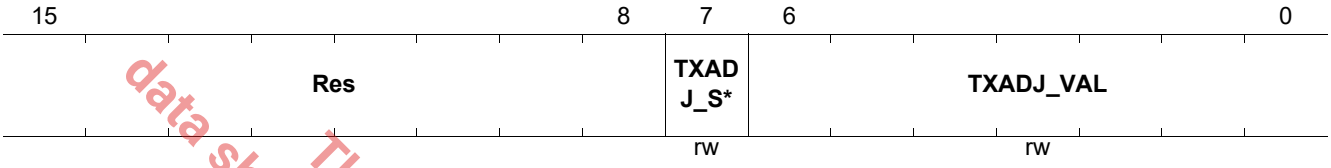

Field	Bits	Type	Description
TXADJ_SGN	7	RW	**Transmit Amplitude Adjustment Sign** 0_B **INC** Increase transmit amplitude 1_B **DEC** Decrease transmit amplitude
TXADJ_VAL	6:0	RW	**Transmit Amplitude Adjustment Value** Multiply the transmit amplitude by the following factor. (1 + (1-TXADJ_SGN*2)*TXADJ_VAL/128) The amplitude adjustment takes effect on the next link up.


data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

NBASE-T Downshift Control Register (Register 30.10)

IEEE Standard Register=30.10

VSPEC1_NBT_DS_CTRL **Reset Value**

NBASE-T Downshift Control Register (Register 30.10) **0400_H**

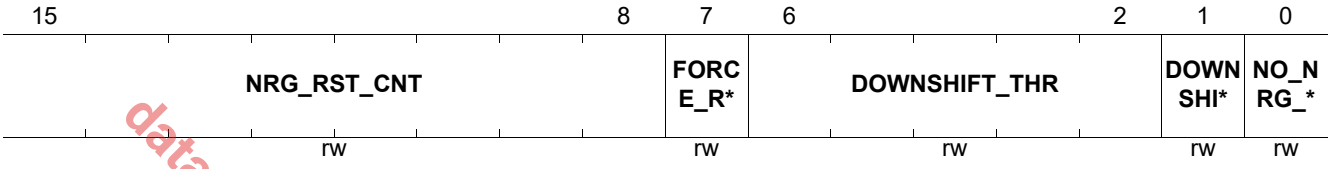

Field	Bits	Type	Description
NRG_RST_CNT	15:8	RW	**Timer to Reset the Downshift Process** When the energy is zero for a duration equal to NRG_RST_CNT seconds, the ANEG advertised capabilities are reset to the maximum GPHY capabilities. When NRG_RST_CNT is lower than 2, the ADS feature cannot be enabled. Default is 4 seconds. *Note: This timer only takes effect when NO_NRG_RST is set.*
FORCE_RST	7	RW	**Force Reset of Downwshift Process** Setting this bit to 1 immediately resets the ANEG advertised capabilities to the maximum GPHY capabilities.
DOWNSHIFT_THR	6:2	RW	**NBASE-T Downshift Training Counter Threshold** dsh_thr variable in NBASE-T specification This is a 4-bit counter from 0 to 15 used to control the number of training cycles allowed for linkup, otherwise downshift.
DOWNSHIFT_EN	1	RW	**NBASE-T Downshift Enable** dsh_en variable in NBASE-T specification 0_B **DISABLE** Disables NBT downshift. 1_B **ENABLE** Enables NBT downshift.
NO_NRG_RST	0	RW	**Advertise All Speeds if No Energy Detected** When no energy is detected, this resets to advertise all speeds. Energy variable in NBASE-T specification 0_B **DISABLE** Do not reset speeds advertised when no energy is detected. 1_B **ENABLE** Reset speeds advertised when no energy is detected.


data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

NBASE-T Downshift Status Register (Register 30.11)

IEEE Standard Register=30.11

VSPEC1_NBT_DS_STA **Reset Value**

NBASE-T Downshift Status Register (Register 30.11) **0000_H**

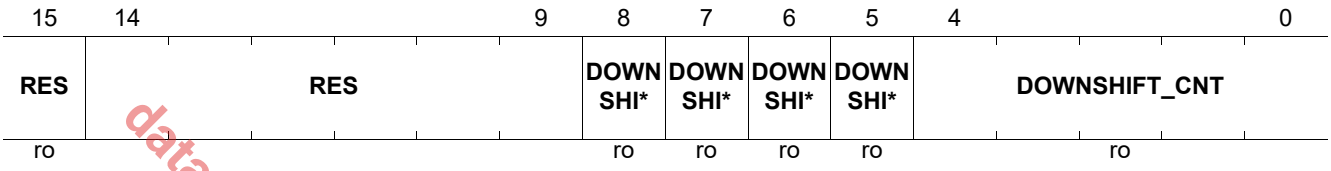

Field	Bits	Type	Description
DOWNSHIFT_1G	8	RO	**Downshift from 1G to Lower Speed**
DOWNSHIFT_2G5	7	RO	**Downshift from 2.5 G to Lower Speed**
DOWNSHIFT_5G	6	RO	**Downshift 5G to Lower Speed** Not supported by the GPHY
DOWNSHIFT_10G	5	RO	**Downshift 10G to Lower Speed** Not supported by the GPHY
DOWNSHIFT_CNT	4:0	RO	**Training Attempt Counter** Counts training attempts to select the operating speed. dsh_cnt state variable in NBASE-T specification

The product(or products)mentioned in this data sheet are Not Recommended for New Designs (NRND)

Packet Manager Control (Register 30.12)

IEEE Standard Register=30.12

Control the Packet Manager Configuration

VSPEC1_PM_CTRL **Reset Value**

Packet Manager Control (Register 30.12) **3000_H**

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
RES	RES			MDINT_M*	RES	RES	RES	RES	RES		RES	RES	RES	SI	RES
rw	rw			rw	rw	rw	rw	rw	rw		rw	rw	rw	rw	rw

Field	Bits	Type	Description
MDINT_MODE	11	RW	**MDIO Interrupt Mode** Sets the mode of the MDIO interrupt signal. 0_B **TRI** Tristate mode The MDIO interrupt signal is tristate when the interrupt is inactive. It is driven only when the interrupt is active. 1_B **PP** Push-pull mode The MDIO interrupt signal is constantly driven. Active-high MDIO interrupt is not supported in this mode.
SI	1	RW	**Super Isolate** Use in Super Isolate mode. Forces the device into a power down state by pin strapping (SLEEP) in which power consumption is the bare minimum required to still maintain the MII management interface communication. When activating the power down functionality, the PHY terminates active data links. The MII interface is also stopped in power down mode. See also IEEE 802.3-2008 22.2.4.1.5. The SI bit is only used to release the device from Super Isolate mode. Entering Super Isolate mode can only be activated by pin strapping at power up. 0_B **NORMAL** Normal operational mode 1_B **SUPER_ISOLATE** Super Isolate mode

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this


Temperature Code (Register 30.14)

Junction temperature is presented in degrees Celsius

IEEE Standard Register=30.14

VSPEC1_TEMP_STA **Reset Value**

Temperature Code (Register 30.14) **0000_H**



Field	Bits	Type	Description
TEMP_DATA	15:0	RO	**Junction Temperature** The temperature is represented as a two's complement binary fixed point number, of which the 7 LSBs are fractional. The STA must take the thermal mitigation measures when the junction temperature exceeds the normal operating range if ADS is disabled. TEMP_DATA is invalid when the value is 0000_H. Example Tj Values (Decimal): • For Tj = -40 degC, TEMP_DATA = $EC00_H$ • For Tj= +125 degC, TEMP_DATA = $3E80_H$

data sheet are Not Recommended for New Designs (NRND)
The product(s) mentioned in this

VSPEC1 Interrupt Mask Register (Register 30.17)

This register defines the mask for the Interrupt Status Register (ISTAT), which contains the event source for the MDINT interrupt sent from the GPHY to an external chip. The mask is cleared whenever the corresponding interrupt is serviced.

The information about the interrupt source is indicated in the VSPEC1_ISTAT register.

IEEE Standard Register=30.17

VSPEC1_IMASK **Reset Value**

VSPEC1 Interrupt Mask Register (Register 30.17) **0000_H**

15	...	6	5	4	3	2	1	0
RES			CDET	RES	RES	RES	RES	RES
			rw	rw	rw	rw	rw	rw

Field	Bits	Type	Description
CDET	5	RW	**Cable Detect Interrupt** When active, MDINT is activated upon interrupt from detection of energy on the link. 0_B **INACTIVE** Interrupt is masked out. 1_B **ACTIVE** Interrupt is activated.

data sheet are Not Recommended for New Designs (NRND)
The product(s) mentioned in this

VSPEC1 Interrupt Status Register (Register 30.18)

This register defines the event source for the MDINT interrupt sent from the GPHY to an external chip based on the mask settings in the VSPEC1_IMASK register.

VSPEC1_ISTAT is a cleared on read by the STA.

IEEE Standard Register=30.18

VSPEC1_ISTAT **Reset Value**

VSPEC1 Interrupt Status Register (Register 30.18) **0000_H**

15	...	6	5	4	3	2	1	0
RES			CDET	RES	RES	RES	RES	RES
			rosc	rosc	rosc	rosc	rosc	rosc

Field	Bits	Type	Description
CDET	5	ROSC	**Cable Detect Interrupt** When this bit is set, MDINT is activated upon interrupt from detection of energy on the link. 0_B **INACTIVE** This event is not the interrupt source. 1_B **ACTIVE** The cable detect interrupt is the source of the interrupt.

data sheet are not Recommended for New Designs (NRND)
The product(s) mentioned in this


ASP Mapping to Physical Lanes (Register 30.20)

This register offers a programmable option to map physical lanes A, B, C, and D of the TPI to the ASPs. Each ASP must be mapped to each lane.

IEEE Standard Register=30.20

VSPEC1_LANE_ASP_MAP **Reset Value**

ASP Mapping to Physical Lanes (Register 30.20) **$00E4_H$**



Field	Bits	Type	Description
LANE_D	7:6	RW	**Map Physical Lane-D to the ASP** 00_B **ASPA** Map Physical Lane-D to the ASP-A 01_B **ASPB** Map Physical Lane-D to the ASP-B 10_B **ASPC** Map Physical Lane-D to the ASP-C 11_B **ASPD** Map Physical Lane-D to the ASP-D
LANE_C	5:4	RW	**Map Physical Lane-C to the ASP** 00_B **ASPA** Map Physical Lane-C to the ASP-A 01_B **ASPB** Map Physical Lane-C to the ASP-B 10_B **ASPC** Map Physical Lane-C to the ASP-C 11_B **ASPD** Map Physical Lane-C to the ASP-D
LANE_B	3:2	RW	**Map Physical Lane-B to the ASP** 00_B **ASPA** Map Physical Lane-B to the ASP-A 01_B **ASPB** Map Physical Lane-B to the ASP-B 10_B **ASPC** Map Physical Lane-B to the ASP-C 11_B **ASPD** Map Physical Lane-B to the ASP-D
LANE_A	1:0	RW	**Map Physical Lane-A to the ASP** 00_B **ASPA** Map Physical Lane-A to the ASP-A 01_B **ASPB** Map Physical Lane-A to the ASP-B 10_B **ASPC** Map Physical Lane-A to the ASP-C 11_B **ASPD** Map Physical Lane-A to the ASP-D

data sheet are Not Recommended for New Designs (NRND)
The product (s/products) mentioned in this


Time to Enter Low Power (Register 30.21)

Programmable option to delay the time taken to enter low power mode.

IEEE Standard Register=30.21

VSPEC1_LOW_POWER_ENTRY_TIME **Reset Value**

Time to Enter Low Power (Register 30.21) **0001_H**



Field	Bits	Type	Description
LPE_TIM	4:0	RW	**Low Power Entry Time** This is the time taken from detection of no activity on the line to the low power completion. The granularity is 4 seconds and adds 2.4 seconds to 5.6 seconds on to the initial time.

data sheet are Not Recommended for New Designs (NRND)
The product(s) mentioned in this

Fast Retrain Control and Status (Register 30.22)

This register supports fast retrain (FR) as follows:

1. Configures the FR capability (IEEE, CISCO(THPBYP,TXDIS,EXT) [4]).
2. Records the link partner FR capability.
3. Reports the FW resolution of the FR capability.
4. Defines the maximum allowed number of times to try FR before performing a full link down.

IEEE Standard Register=30.22

VSPEC1_FRCTL **Reset Value**

Fast Retrain Control and Status (Register 30.22) **0000_H**

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
MAX_FR_*	**STAT_IE***	**STAT_CI***	**STAT_TH***	**STAT_TX***	**STAT_EXT**	**LP_IEEE**	**LP_CISCO**	**LP_THPB***	**LP_TXDIS**	**LP_EXT**	**CAP_IEEE**	**CAP_CIS***	**CAP_THP***	**CAP_TXD***	**CAP_EXT**
rw	ro	ro	ro	ro	ro	ro	ro	ro	ro	ro	rw	rw	rw	rw	rw

Field	Bits	Type	Description
MAX_FR_RETRY	15	RW	**Maximum Number of FR Retries Before Taking Linking Down** 0_B **DISABLE** Maximum number of retries limited to 4. 1_B **ENABLE** Maximum number of retries limited to 8.
STAT_IEEE	14	RO	**Resolved for IEEE FR** 0_B **DISABLE** Resolved to no IEEE FR. 1_B **ENABLE** Resolved to IEEE FR.
STAT_CISCO	13	RO	**Resolved for CISCO FR** 0_B **DISABLE** Resolved to no CISCO FR 1_B **ENABLE** Resolved to CISCO FR
STAT_THPBYP	12	RO	**Resolved Status THP BYP during COEF_EXCH for Either CISCO FR or IEEE FR** 0_B **DISABLE** Resolved that THP is not BYP for either CISCO FR or IEEE FR 1_B **ENABLE** Resolved that THP is BYP during COEF EXCH for either CISCO FR or IEEE FR
STAT_TXDIS	11	RO	**Resolved Status for CISCO FR with TX DISABLE** 0_B **DISABLE** Resolved that CISCO FR is not followed by TX DISABLE after link fail signaling 1_B **ENABLE** Resolved that CISCO FR is followed by TX DISABLE after link fail signaling
STAT_EXT	10	RO	**Resolved Status for CISCO Extended FR Timing** 0_B **DISABLE** Resolved for no CISCO FR with extended timing 1_B **ENABLE** Resolved for CISCO FR with extended timing
LP_IEEE	9	RO	**LP Request for IEEE FR** 0_B **DISABLE** No advertise for IEEE FR 1_B **ENABLE** Advertise capable of doing IEEE FR

Data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

Field	Bits	Type	Description (cont'd)
LP_CISCO	8	RO	**LP Request for CISCO FR** 0_B **DISABLE** No advertise for CISCO FR 1_B **ENABLE** Advertise capable of doing CISCO FR
LP_THPBYP	7	RO	**LP Request for THP BYP During COEF_EXCH for Either CISCO FR or IEEE FR** 0_B **DISABLE** No request for THP BYP for either CISCO FR or IEEE FR 1_B **ENABLE** Request for THP BYP during COEF EXCH for either CISCO FR or IEEE FR
LP_TXDIS	6	RO	**LP Request for CISCO FR with TX DISABLE** 0_B **DISABLE** No request that CISCO FR is followed by TX DISABLE after link fail signaling 1_B **ENABLE** Request that CISCO FR is followed by TX DISABLE after link fail signaling
LP_EXT	5	RO	**LP Request for CISCO Extended FR Timing** 0_B **DISABLE** No request for CISCO FR with extended timing 1_B **ENABLE** Request for CISCO FR with extended timing
CAP_IEEE	4	RW	**Request for IEEE FR** 0_B **DISABLE** No advertise for IEEE FR 1_B **ENABLE** Advertise capable of doing IEEE FR
CAP_CISCO	3	RW	**Capable of Advertising CISCO FR** 0_B **DISABLE** No advertise for CISCO FR 1_B **ENABLE** Advertise capable of doing CISCO FR
CAP_THPBYP	2	RW	**Request LP for THP BYP during COEF_EXCH for Both CISCO FR and IEEE FR** 0_B **DISABLE** No request to LP for THP BYP for either CISCO FR or IEEE FR 1_B **ENABLE** Request LP for THP BYP during COEF EXCH for either CISCO FR or IEEE FR
CAP_TXDIS	1	RW	**Request for CISCO FR with TX DISABLE** 0_B **DISABLE** No request for CISCO FR with TX DISABLE after link fail signaling 1_B **ENABLE** Advertise request that CISCO FR is followed by TX DISABLE after link fail signaling
CAP_EXT	0	RW	**Request for CISCO Extended FR Timing** 0_B **DISABLE** No request for CISCO FR with extended timing 1_B **ENABLE** Advertise request for CISCO FR with extended timing

data sheet are Not Recommended for New Designs (NRND)
The product (or product(s) mentioned in this

6.5 Vendor Specific 2 Device Registers

This register file contains the GPHY-specific registers for MMD=31 (decimal).

Table 35 Registers Overview- Vendor Specific 2 Device Registers

Register Short Name	Register Long Name	Reset Value
VPSPEC2_WOL_CTL	WoL Control Register (Register 31.3590)	0000_H
VPSPEC2_WOL_AD01	WoL Address Byte 0 and 1 (Register 31.3592)	0000_H
VPSPEC2_WOL_AD23	WoL Address Byte 2 and 3 (Register 31.3593)	0000_H
VPSPEC2_WOL_AD45	WoL Address Byte 4 and 5 (Register 31.3594)	0000_H
VPSPEC2_WOL_PW01	WoL SecureON Password Byte 0 (Register 31.3595)	0000_H
VPSPEC2_WOL_PW23	WoL SecureON Password Byte 2 and 3 (Register 31.3596)	0000_H
VPSPEC2_WOL_PW45	WoL SecureON Password Byte 4 and 5 (Register 31.3597)	0000_H

Data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

6.5.1 VSPEC2 Register Descriptions

This section describes all the VSPEC2 registers in detail.


Wake-on-LAN Control Register (Register 31.3590)

This is the Wake-on-LAN control register. Redirected to PCS_PDI_WOL_CTL.

IEEE Standard Register=31.3590

VPSPEC2_WOL_CTL **Reset Value**

Wake-on-LAN Control Register (Register 31.3590) **0000_H**

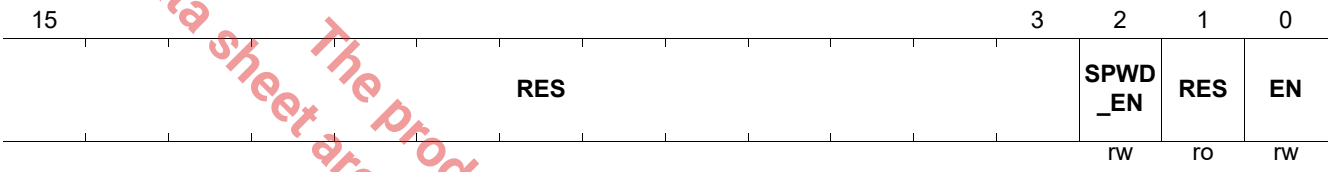

Field	Bits	Type	Description
SPWD_EN	2	RW	**Secure-ON Password Enable** When this bit is set to enabled, the SecureON password is checked after 16 MAC address repetitions. 0_B **DISABLED** Disables the SecureON password check 1_B **ENABLED** Enables the SecureON password check
RES	1	RO	**Reserved** Must always be written to 0.
EN	0	RW	**Enables the Wake-on-LAN Functionality** When WoL is enabled, the PHY scans for the configured magic packet and indicates its reception via the register bit ISTAT. WoL and optionally also via interrupt. 0_B **DISABLED** Disables the WoL functionality 1_B **ENABLED** Enables the WoL functionality

Data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this


Wake-on-LAN Address Byte 0 and 1 (Register 31.3592)

Wake-on-LAN Address Byte 0 and 1. Redirected to PCS_PDI_WOL_AD01.

IEEE Standard Register=31.3592

VPSPEC2_WOL_AD01 **Reset Value**

Wake-on-LAN Address Byte 0 and 1 (Register 31.3592) **0000_H**



Field	Bits	Type	Description
AD1	15:8	RW	**Address Byte 1** Defines byte 1 of the WoL-designated MAC address to which the PHY is sensitive.
AD0	7:0	RW	**Address Byte 0** Defines byte 0 of the WoL-designated MAC address to which the PHY is sensitive.

The product(s) mentioned in this data sheet are Not Recommended for New Designs (NRND)


Wake-on-LAN Address Byte 2 and 3 (Register 31.3593)

Wake-on-LAN Address Byte 2 and 3. Redirected to PCS_PDI_WOL_AD23.

IEEE Standard Register=31.3593

VPSPEC2_WOL_AD23 **Reset Value**

Wake-on-LAN Address Byte 2 and 3 (Register 31.3593) **0000_H**



Field	Bits	Type	Description
AD3	15:8	RW	**Address Byte 3** Defines byte 3 of the WoL-designated MAC address to which the PHY is sensitive.
AD2	7:0	RW	**Address Byte 2** Defines byte 2 of the WoL-designated MAC address to which the PHY is sensitive.

The product(s) mentioned in this data sheet are Not Recommended for New Designs (NRND)


Wake-on-LAN Address Byte 4 and 5 (Register 31.3594)

Wake-on-LAN Address Byte 4 and 5. Redirected to PCS_PDI_WOL_AD45.

IEEE Standard Register=31.3594

VPSPEC2_WOL_AD45 **Reset Value**

Wake-on-LAN Address Byte 4 and 5 (Register 31.3594) **0000_H**



Field	Bits	Type	Description
AD5	15:8	RW	**Address Byte 5** Defines byte 5 of the WoL-designated MAC address to which the PHY is sensitive.
AD4	7:0	RW	**Address Byte 4** Defines byte 4 of the WoL-designated MAC address to which the PHY is sensitive.

data sheet are Not Recommended for New Designs (NRND)
The product(s) mentioned in this


Wake-on-LAN SecureON Password Byte 0 (Register 31.3595)

Wake-on-LAN SecureON Password Byte 0. Redirected to PCS_PDI_WOL_PWD01.

IEEE Standard Register=31.3595

VPSPEC2_WOL_PW01 **Reset Value**

Wake-on-LAN SecureON Password Byte 0 (Register 31.3595) **0000_H**



Field	Bits	Type	Description
PW1	15:8	RW	**SecureON Password Byte 1** Defines byte 1 of the WoL-designated SecureON password to which the PHY is sensitive.
PW0	7:0	RW	**SecureON Password Byte 0** Defines byte 0 of the WoL-designated SecureON password to which the PHY is sensitive.

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this


Wake-on-LAN SecureON Password Byte 2 and 3 (Register 31.3596)

Wake-on-LAN SecureON Password Byte 2 and 3. Redirected to PCS_PDI_WOL_PWD23.

IEEE Standard Register=31.3596

VPSPEC2_WOL_PW23 **Reset Value**

Wake-on-LAN SecureON Password Byte 2 and 3 (Register 31.3596) **0000_H**



Field	Bits	Type	Description
PW3	15:8	RW	**SecureON Password Byte 3** Defines byte 3 of the WoL-designated SecureON password to which the PHY is sensitive.
PW2	7:0	RW	**SecureON Password Byte 2** Defines byte 2 of the WoL-designated SecureON password to which the PHY is sensitive.

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this


Wake-on-LAN SecureON Password Byte 4 and 5 (Register 31.3597)

Wake-on-LAN SecureON Password Byte 4 and 5. Redirected to PCS_PDI_WOL_PWD45.

IEEE Standard Register=31.3597

VPSPEC2_WOL_PW45 **Reset Value**

Wake-on-LAN SecureON Password Byte 4 and 5 (Register 31.3597) **0000_H**



Field	Bits	Type	Description
PW5	15:8	RW	**SecureON Password Byte 5** Defines byte 5 of the WoL-designated SecureON password to which the PHY is sensitive.
PW4	7:0	RW	**SecureON Password Byte 4** Defines byte 4 of the WoL-designated SecureON password to which the PHY is sensitive.

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

7 Electrical Characteristics

This chapter provides the electrical characteristics for the MxL86250C.

7.1 Absolute Maximum Ratings

Table 36 shows the absolute maximum ratings for the MxL86250C.

Table 36 Absolute Maximum Ratings

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Storage Temperature Limits	T_{STG}	-55.0	–	125.0	°C	–
Soldering Temperature	T_{SOL}	–	–	260.0	°C	Compliance with lead free re-flow soldering profile as J-STD-020D
Moisture Level 3 Temperature Limits	T_{ML3}	–	–	260.0	°C	According to IPS J-STD 020
Absolute Junction Temperature	T_{JABS}	-40.0		125	°C	The thermal solution must ensure that T_J never exceeds T_{JABS} maximum. The chip resets the device when T_J > T_{JABS} maximum to prevent any damage to occur.
DC Voltage Limits on VDD3V3PAD1, VDD3V3PAD2 Pins	V_{DDP3V3}	-0.5	–	+3.63	V	Generic ball V_{HIGH} supply
DC Voltage Limits on VDDP_PAD Pins when Ball K4 Pin Strap PS_MDIO_VOLTAGE is HIGH	V_{DDP}	-0.5	–	+3.63	V	Multi voltage ball V_{HIGH} supply
DC Voltage Limits on VDDP_PAD Pins when Ball K4 Pin Strap PS_MDIO_VOLTAGE is LOW	V_{DDP}	-0.5	–	+1.98	V	Multi voltage ball supply. 1.8 V supply dedicated to MDIO pins in lower mode
DC Voltage Limits on VDDA3V3_0, VDDA3V3_1, VDDA3V3_2, VDDA3V3_3, VDDA3V3_4 Pins	V_{DDA3V3}	-0.5	–	+3.63	V	Chip analog V_{HIGH} supply
DC Voltage Limits on VDDA1V8_0, VDDA1V8_1 Pins	V_{DDA1V8}	-0.5	–	+1.98	V	Chip analog supply
DC Voltage Limits on VDDA1V8PORXO, VDDA1V8_PVT, VCC1V8_OTP, and VDDA1V8_CML Pins	$V_{DDA1V8PORXO}$ $V_{DDA1V8PVT}$ $V_{CC1V8OTP}$ $V_{DDA1V8CML}$	-0.5	–	+1.98	V	Chip clocking supply

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

Table 36 Absolute Maximum Ratings (cont'd)

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
DC Voltage Limits on VPHA1V8_0, VPHA1V8_1, and VDDA1V8_PLL Pins	V_{PH} $V_{DDA1V8PLL}$	-0.5	–	+1.98	V	LJ PLL V_{HIGH} supply
DC Voltage Limits on VDDA1V2CDB0, VDDA1V2CDB1 Pins	$V_{DDA1V2CDB}$	-0.5	–	+1.32	V	Chip analog supply
DC Voltage Limits on VDDA0V8_0, VDDA0V8_1, VDDD0V8REF, VDDD0V8POST, and VDDA0V8_CML Pins	V_{DDA0V8} $V_{DDD0V8PLL}$ $V_{DDA0V8CML}$	-0.5	–	+0.88	V	Chip analog V_{LOW} supply, LJ PLL V_{LOW} supply
DC Voltage Limits on VDDD0V8_COR Pins	V_{DD}	-0.5	–	+0.88	V	Chip core supply
DC Voltage Limits on VA0V8_0, VA0V8_1 Pins	V_P	-0.5	–	+0.88	V	V_{LOW} supply
DC Voltage Limits on Any Other Pins[1] with Respect to Ground	V_{DC}	-0.5	–	V_{DDP3V3}+ 0.5	V	Unless specified otherwise
XTAL1 Input Voltage	V_{XTAL1}	-0.30	–	2.0	V	–
ESD HBM Robustness	$V_{ESD,HBM}$	–	–	1000.0	V	According to ANSI/ESDA/JEDEC JS-001-2014
ESD CDM Robustness	$V_{ESD,CDM}$	–	–	250.0	V	According to ANSI/ESDA/JEDEC JS-002-2014

1) Any pin that is not a supply pin out of one of the domains: V_{DDP}, V_{PH}, V_P, V_{DDA3V3}, $V_{DDA1V8PORXO}$, $V_{DDA1V2CDB}$, V_{DDA0V8}, V_{DD}, and V_{DDA1V8}.

Attention: Stresses above the maximum values listed in this table may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect device reliability. Maximum ratings are absolute ratings; exceeding only one of these values may cause irreversible damage to the device.

The product (or products) mentioned in this data sheet are Not Recommended for New Designs (NRND)

7.2 Operating Range

Table 37 defines the limit values of voltages and temperature which may be applied to guarantee proper operation of the MxL86250C.

Table 37 Operating Range

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Ambient Temperature under Bias	T_A	0	–	70	°C	The thermal design must ensure that the maximum junction temperature is not exceeded. The use of a heat sink may be suitable.
Junction Temperature	T_j	–	–	110.0	°C	Thermal solution must ensure that T_j remains within operating range and never exceeds maximum absolute ratings (T_{JABS}).
Generic Pin Supply Voltage	V_{DDP3V3}	3.14	3.30	3.46	V	Generic pin V_{HIGH} supply
Multi Voltage Pin Supply Voltage for MDIO Signals when Ball K4 Pin Strap PS_MDIO_VOLTAGE is HIGH	V_{DDP}	3.14	3.30	3.46	V	Multi voltage pin V_{HIGH} supply
Multi Voltage Pin Supply Voltage for MDIO Signals when Ball K4 Pin Strap PS_MDIO_VOLTAGE is LOW	V_{DDP}	1.71	1.80	1.89	V	Multi voltage pin supply. 1.8 V supply dedicated to MDIO pins in lower mode
Analog High Supply Voltage	V_{DDA3V3}	3.14	3.30	3.46	V	Chip analog V_{HIGH} supply
XO Supply Voltage	$V_{DDA1V8PORXO}$	1.71	1.80	1.89	V	Chip clocking V_{HIGH} supply
Analog Medium Supply Voltage	V_{DDA1V8}	1.71	1.80	1.89	V	Chip analog V_{MED} supply
CDB Supply Voltage	$V_{DDA1V2CDB}$	1.14	1.20	1.26	V	Chip analog supply
High Supply Voltage	V_{PH}	1.71	1.80	1.89	V	V_{HIGH} supply
LJ PLL High Supply Voltage	$V_{DDA1V8PLL}$	1.71	1.80	1.89	V	LJ PLL V_{HIGH} supply
Analog Low Supply Voltage	V_{DDA0V8}	0.76	0.8	0.84	V	Chip analog V_{LOW} supply
LJ PLL Low Supply Voltage	$V_{DDD0V8PLL}$	0.76	0.8	0.84	V	LJ PLL V_{LOW} supply
Chip Core Supply Voltage	V_{DD}	0.76	0.8	0.84	V	Chip core supply
Low Supply Voltage	V_P	0.76	0.8	0.84	V	V_{LOW} supply
Ground	V_{SS}	0.00	0.00	0.00	V	–

Attention: Operations above the maximum values listed here for extended periods may adversely affect long-term reliability of the device.

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

7.3 Typical Power Consumption

Table 38 lists the typical power consumption for different modes. Typical power is the power consumed by a nominal process device, nominal supply voltages, at 25°C ambient temperature and a CAT5e link segment.

The conditions for Link-up are full speed and bidirectional, full duplex traffic on all 5 ports. The switch operates at 12.5 Gbps wirespeed with 5 ports.

Table 38 Typical Power Consumption

Conditions: 25°C	3.3 V V_{HIGH} Domain Current	1.8 V Domain Current	1.2 V Domain Current	0.8 V V_{LOW} Domain Current	Chip Power
Unit	**mA**	**mA**	**mA**	**mA**	**W**
2500BASE-T Link-up, 100 m Cable	242	53	292	2755	3.4
2500BASE-T Link-up, 30 m Cable	223	58	276	2458	3.1
2500BASE-T EEE	187	48	85	1129	1.7
1000BASE-T Link-up, 100 m Cable	198	52	271	1479	2.3
1000BASE-T EEE	27	48	71	680	0.8
100BASE-TX Link-up, 100 m Cable	78	45	71	966	1.2
100BASE-TX EEE	31	42	75	547	0.7
10BASE-Te Link-up, 100 m Cable	86	45	42	931	1.2
Cable Unplugged - ANEG	48	47	40	537	0.7
Cable Unplugged - Low Power	27	38	4	339	0.4
Reset	1	25	1	58	0.1

7.4 Maximum Thermal Design Power

Table 39 lists the maximum Thermal Design Power (TDP). The TDP is the power consumption for a full traffic load and worst-case process, supply voltage, cable, and temperature conditions. This value is relevant to design the thermal solution.

Table 39 Maximum Power Consumption

Condition	Maximum Power (W)
Maximum Chip Power at Maximum Operating Range	5.2

Note: With a properly designed thermal solution (heat sink), it is unlikely that Tj exceeds the maximum operating junction temperature. An excess is reported in the MDIO register VSPEC1_TEMP_STA and the STA can initiate a renegotiation to a lower link rate to get Tj back into the operating temperature range if ADS is disabled.

7.5 Maximum Current

Table 40 provides the maximum current to dimension the power supply. It is the maximum current consumption per rail for a full traffic load and worst-case process, supply voltage and temperature conditions that may occur in any operating state of the device. The maximum current can be higher than the steady state current, for instance in training phases of the internal filters.

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

Table 40 Maximum Current Per Rail

3.3 V Domain Current	1.8 V Domain Current	1.2 V Domain Current	0.8 V Domain Current
mA	**mA**	**mA**	**mA**
303	60	370	4822

The product (or products) mentioned in this data sheet are Not Recommended for New Designs (NRND)

7.6 DC Characteristics

These sections document the DC characteristics of the MxL86250C external interfaces.

7.6.1 Digital Interfaces

This section defines the DC characteristics of the GPIO interface as follows:

- General Purpose IO
- MDIO
- QSPI
- UART
- Interrupts
- Clock Input and Outputs
- LED
- JTAG
- HRSTN

Table 41 summarizes the DC characteristics for V_{DDP} = 3.3 V.

Table 41 DC Characteristics of the GPIO Interfaces (VDDP = 3.3 V)

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Input High Voltage	V_{IH}	0.7*V_{DDP}	–	V_{DDP}+0.3	V	–
Input Low Voltage	V_{IL}	–0.3	–	0.3*V_{DDP}	V	–
Output High Voltage	V_{OH}	V_{DDP}-0.4	–	–	V	I_{OH} = 2, 4, 8, 12 mA
Output Low Voltage	V_{OL}	–	–	0.4	V	I_{OL} = 2, 4, 8, 12 mA

Table 42 summarizes the DC characteristics for V_{DDP} = 1.8 V.

Table 42 DC Characteristics of the GPIO Interfaces (VDDP = 1.8 V[1])

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Input High Voltage	V_{IH}	0.65*V_{DDP}	–	V_{DDP}+0.3	V	–
Input Low Voltage	V_{IL}	–0.3	–	0.35*V_{DDP}	V	–
Output High Voltage	V_{OH}	V_{DDP}-0.4	–	–	V	I_{OH} = 2, 4, 8, 12 mA
Output Low Voltage	V_{OL}	–	–	0.4	V	I_{OL} = 2, 4, 8, 12 mA

1) 1.8V is only applicable to the pins specified in PS_MDIO_VOLTAGE of Table 15.

7.6.2 Twisted Pair Interface

The TPI conforms to the specifications of 10BASE-Te (Clause 14), 100BASE-TX (Clause 25), 1000BASE-T (Clause 40), and 2.5GBASE-T (Clause 126) given in IEEE802.3, and ANSI X3.263-1995.

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

7.6.3 Built-in Temperature Sensor

Table 43 provides the parameters of the integrated temperature sensor.

Table 43 Temperature Sensor Characteristics

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Temperature Range	T_{range}	-40		125	°C	The thermal mitigation measures must ensure that T_j remains within the operating range. When T_j exceeds the maximum ratings, the device performs a self-reset to prevent damage.
Resolution		–	12	–	bits	–
Accuracy		-3	–	+3	°C	Without calibration

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

7.7 AC Characteristics

The AC characteristics of the external interfaces are specified under these operating conditions:

T_A = 0 to 70°C

V_{DDP} = 3.3 V ± 5%

V_{SS} = 0 V

The timing measurements are made at minimum V_{IH} for a logical 1 and at maximum V_{IL} for a logical 0. See **Table 41** and **Table 42** for more details.

Figure 24 shows the AC testing input/output waveforms. The load capacitors are according to the specific interface standard. All non-specified interfaces use 30 pF as assumed loading.

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

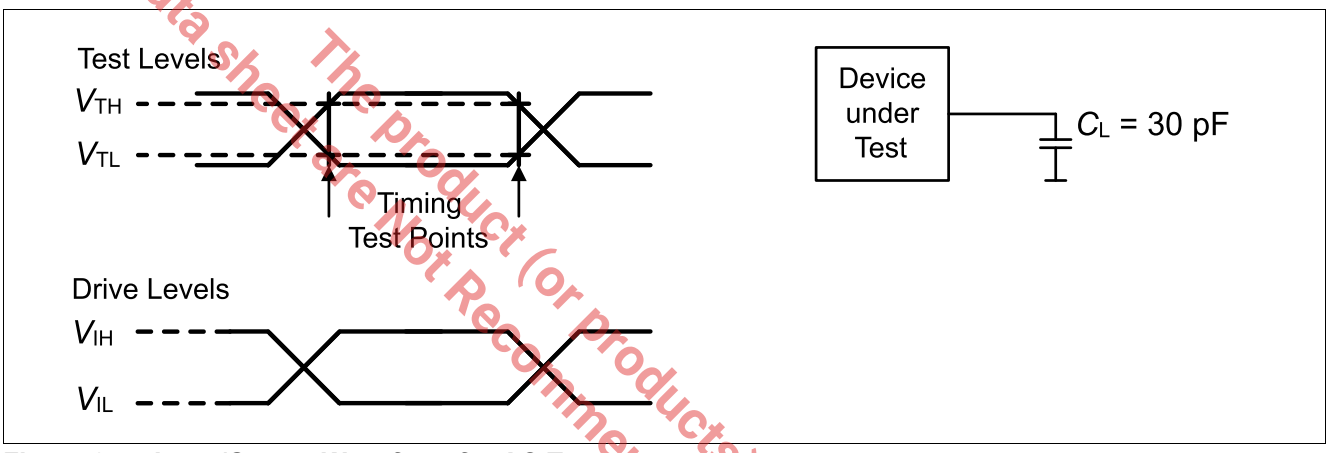


Figure 24 Input/Output Waveform for AC Tests

7.7.1 Power Up Sequence

All V_{HIGH}, V_{PH}, V_{DDA}, and V_{LOW} are supplied externally.

In this section, for the sake of simplicity:

- All 3.3 V supplies are represented as V_{HIGH}.
- All 1.8 V supplies are represented as V_{PH}.
- All 1.2 V supplies are represented as V_{DDA}.
- All 0.8 V supplies are represented as V_{LOW}.

All the supply domains V_{HIGH}, V_{PH}, V_{DDA}, and V_{LOW}, and the input reference clock must be stabilized before releasing the reset HRSTN.

There is no known voltage rail power up sequence except that V_{HIGH} must be ramped up and stable before V_{PH} is ramped up, and V_{LOW} must be ramped up and stable before V_{PH} is ramped up. MaxLinear recommends implementing the power-up sequence defined in the reference board. Refer to the relevant hardware documentation available at **https://maxlinear.com/myMxL** for more information on the power circuitry.

The MxL86250C supports an asynchronous hardware reset HRSTN. **Table 44** lists the timing requirements of the power supply pins. The timings refer to the signal sequence waveforms depicted in **Figure 25**.

When PS_MDIO_VOLTAGE is low, V_{DDP} is treated as V_{PH}.

When PS_MDIO_VOLTAGE is high, V_{DDP} is treated as V_{HIGH}.

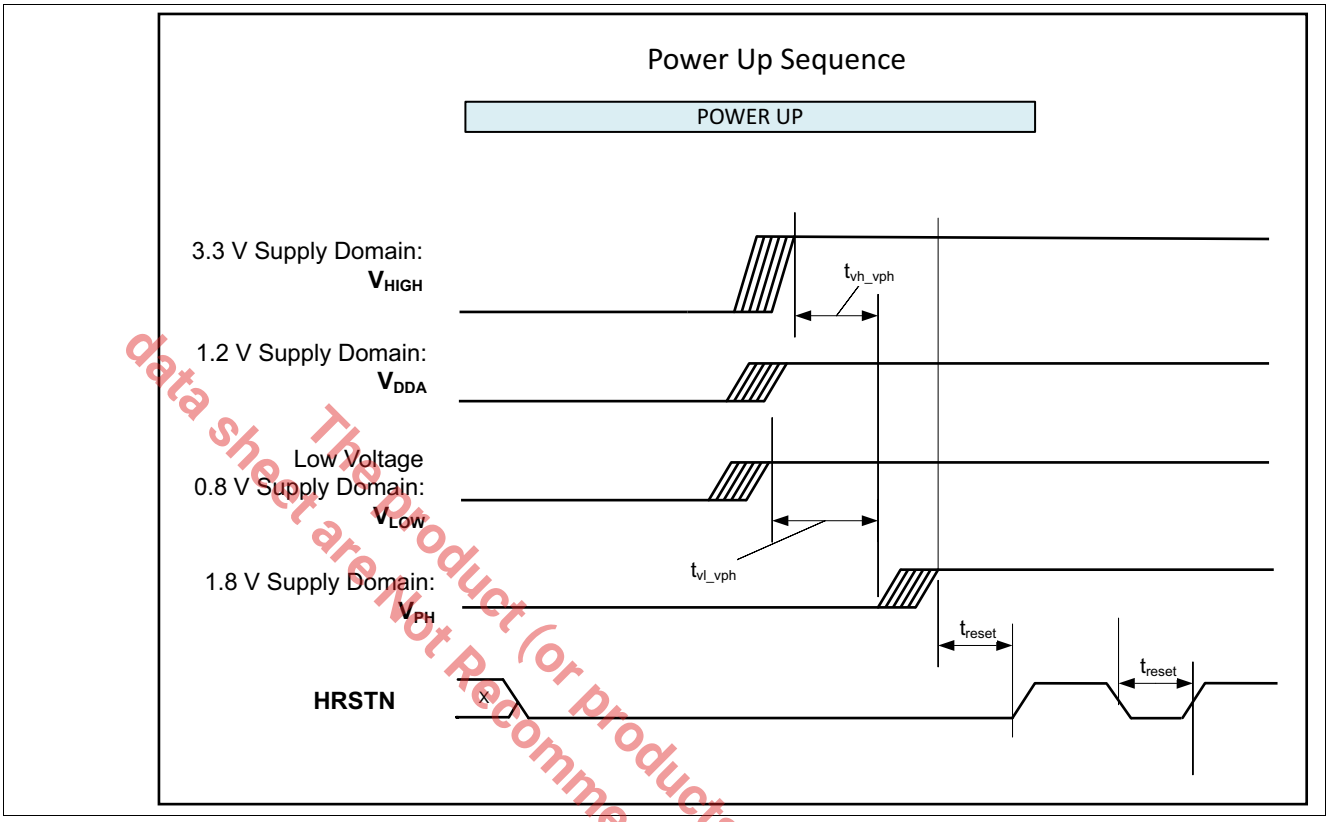


Figure 25 Timing Diagram for the Reset Sequence

Table 44 Power Supply Timings

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Delay between V_{HIGH} and V_{PH} Domains Voltage Ramp Up	t_{vh_vph}	50	-	-	µs	The V_{PH} voltage must never be higher than V_{HIGH} voltage
Delay between V_{LOW} and V_{PH} Domains Voltage Ramp Up	t_{vl_vph}	50	-	-	µs	The V_{PH} voltage must never power up before V_{LOW} voltage.
Reset Time after all Voltage Domains are Stabilized	t_{reset}	100	–	–	ns	HRSTN must be released after the power supplies stabilized.

The product (or products) mentioned in this data sheet are not Recommended for New Designs (NRND)

7.7.2 Input Clock

Table 45 lists the input clock requirements when not using a crystal, for example when an external reference clock is injected into the XTAL1 pin of the MxL86250C, such as nominal frequency, frequency deviation, duty cycle, and signal characteristics. When a crystal is applied to generate the reference clock using the integrated XO, the clock requirements stated here are explicitly met as long as the specification for the crystal is satisfied.

Table 45 AC Characteristics of Input Clock on XTAL1 Pin

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Frequency with 25 MHz Input	f_{clk25}	–	25.0	–	MHz	–
Frequency with 50 MHz Input	f_{clk50}	–	50.0	–	MHz	–
Frequency Deviation[1)]		-50.0	–	+50.0	ppm	–
Duty Cycle		40.0	50.0	60.0	%	–
Rise/Fall Times with 25 MHz Input		–	–	10.0	ns	25 MHz
Rise/Fall Times with 50 MHz Input		–	–	5.0	ns	50 MHz
Input Long Term Jitter (Jrms)		–	–	2.0	ps	1 kHz to 10 MHz
Input Voltage Swing		300.0	–	–	mV	Peak to Peak value
Input Voltage		0	–	1.8	V	–

1) Including the frequency stability tolerance due to temperature, and aging effects over the product lifetime.

7.7.3 Power Supply Rail Requirements

Table 46 lists the required characteristics of the power supplies. The definitions of the power supply rails are the same as that described in Section 7.7.1.

Table 46 AC Characteristics of the Power Supply

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Power Supply Ripple on V_P	R_{VP}	–	–	40.0	mV	Peak to Peak value
Power Supply Ripple on V_{LOW}	R_{VLOW}	–	–	40.0	mV	Peak to Peak value
Power Supply Ripple on V_{DDA}	R_{VDDA}	–	–	50.0	mV	Peak to Peak value
Power Supply Ripple on V_{HIGH}	R_{VHIGH}	–	–	50.0	mV	Peak to Peak value
Power Supply Ripple on V_{PH}	R_{VPH}	–	–	50.0	mV	Peak to Peak value

data sheet are Not Recommended for New Designs (NRND)

7.7.4 MDIO Slave Interface

Figure 26 shows a timing diagram of the MDIO slave interface for a clock cycle in the read, write, and turnaround mode, respectively. The timing measures are annotated. Table 47 summarizes the defined absolute values.

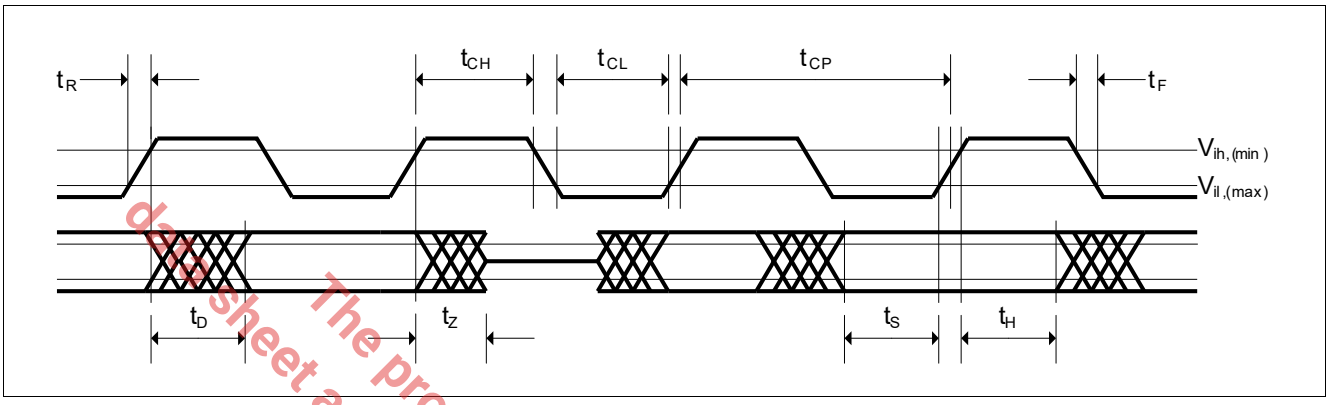


Figure 26 Timing Diagram for the MDIO Slave Interface

Table 47 Timing Characteristics of the MDIO Slave Interface

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
MDC High Time	t_{CH}	10.0	–	–	ns	The MDC signal must conform to the specified MDC timings when measured at the MxL86250C's MDC_S pin.
MDC Low Time	t_{CL}	10.0	–	–	ns	
MDC Clock Period	t_{CP}	40.0	400.0	–	ns	
MDC Clock Frequency[1)]	t_{CP}	–	2.5	25.0	MHz	
MDC Rise Time	t_R	–	–	5.0	ns	
MDC Fall Time	t_F	–	–	5.0	ns	
MDIO Input Setup Time Subject to ↑ MDC	t_S	10.0	–	–	ns	MxL86250C Receive
MDIO Input Hold Time Subject to ↑ MDC	t_H	10.0	–	–	ns	MxL86250C Receive
MDIO Output Delay Time Subject to ↑ MDC	t_D	0.0	–	10	ns	MxL86250C Transmit
Standard at 2.5 MHz						
MDIO Output Delay Subject to ↑ MDC	t_D	0.0	–	300.0	ns	PHY Transmit

1) The MDC clock supports a range of frequencies up to 25 MHz. The default/typical frequency is 2.5 MHz.

data sheet are Not Recommended for New Designs (NRND)
The product(s) mentioned in this

7.7.5 Quad Serial Peripheral Interface (QSPI)

Figure 27 shows the QSPI master timing.

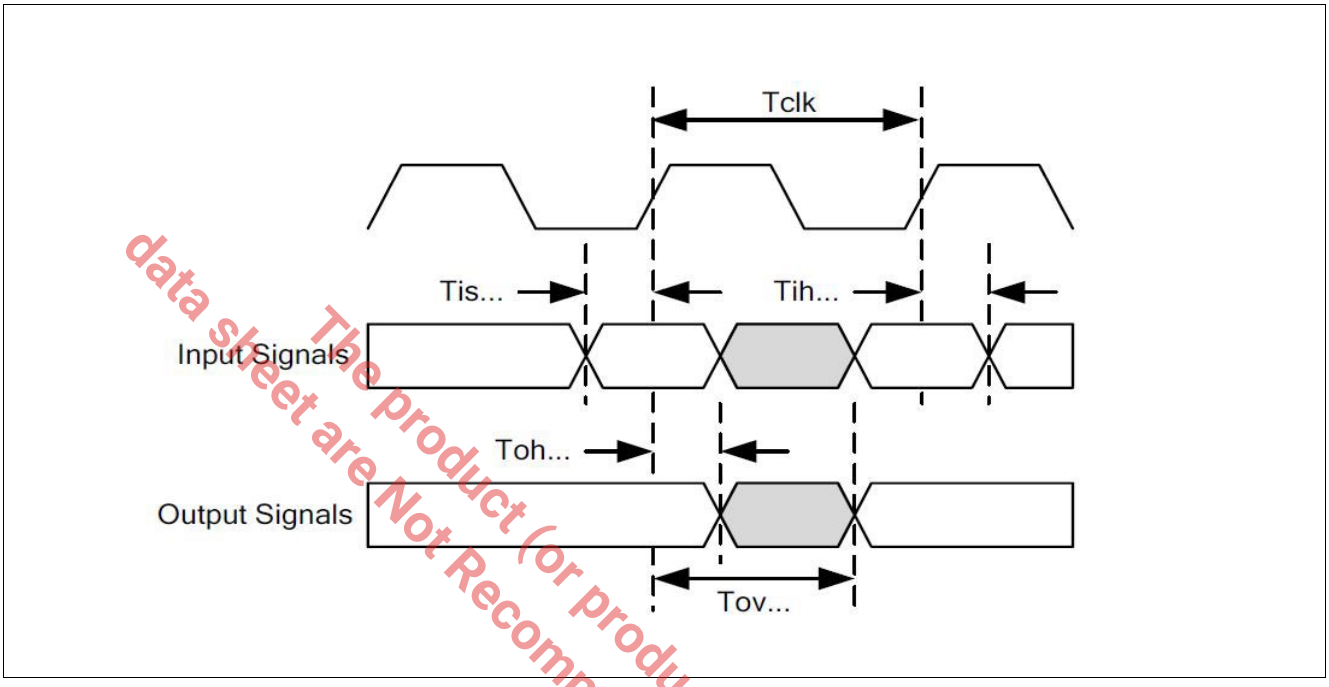


Figure 27 QSPI Master Interface Timing

Table 48 QSPI Interface Timing Parameters

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Master Mode						
TX Data Output Hold	*Toh*	5%	–	–	Tclk	For Tclk = 20 ns
Tx Data Output Delay	*Tov*	0	–	50%	Tclk	For Tclk = 20 ns
Rx Data Input Setup time	*Tis*	35%	–	–	Tclk	For Tclk = 20 ns
Rx Data Hold Time	*Tih*	5%	–	–	Tclk	For Tclk = 20 ns
SPI Clock Period (Master Mode)	*Tclk*	9.846	–	–	ns	Maximum 101.5625 MHz
SPI Clock Rising	S_7	0.1	–	–	V/ns	–
SPI Clock Falling	S_6	0.1	–	–	V/ns	–

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

7.7.6 JTAG Interface

The JTAG test interface is used for debugging the CPU and boundary scan.

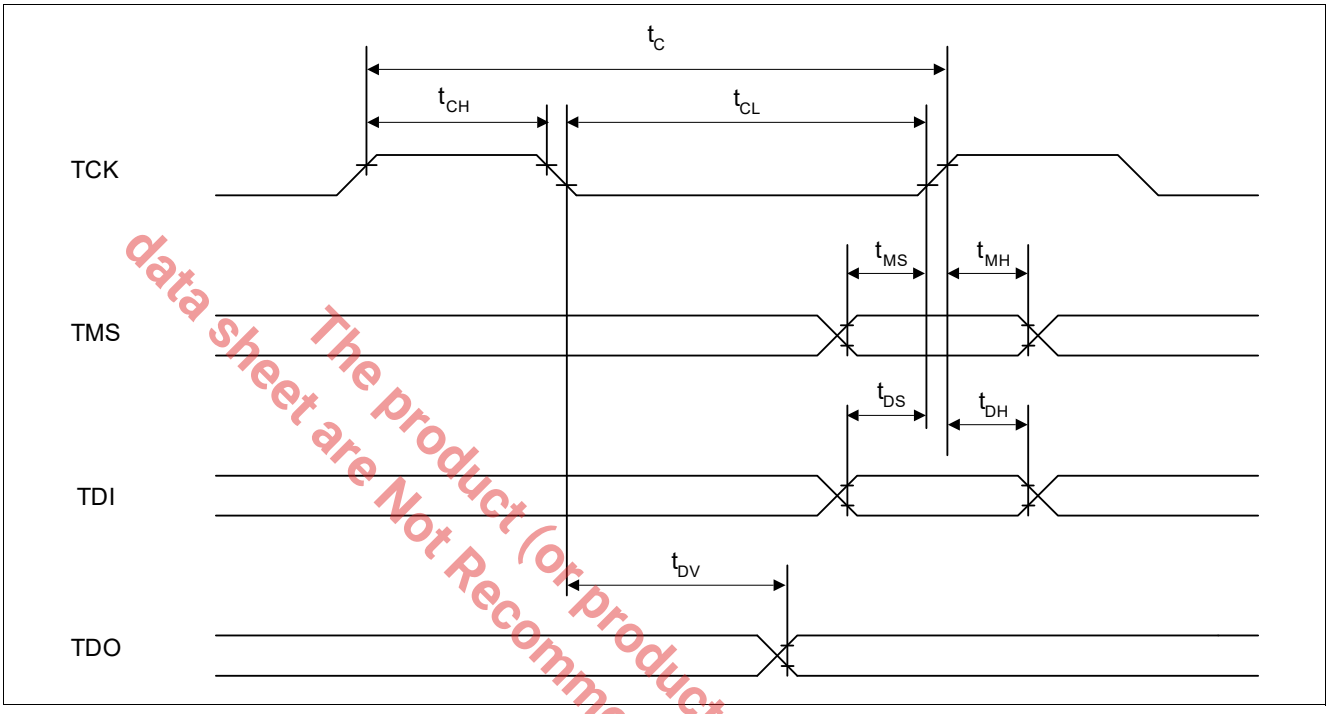


Figure 28 Test Interface Timing

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

Table 49 and Table 50 describe the timing values for the test interface.

Table 49 Test Interface Clock

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
TCK Clock Period	t_C	100	–	–	ns	–
TCK High Time	t_{CH}	40	–	–	ns	–
TCK Low Time	t_{CL}	40	–	–	ns	–

Table 50 JTAG Timing

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
TMS Setup Time	t_{MS}	40	–	–	ns	–
TMS Hold Time	t_{MH}	40	–	–	ns	–
TDI Setup Time	t_{DS}	40	–	–	ns	–
TDI Hold Time	t_{DH}	40	–	–	ns	–
Hold: TRSTN After TCK	t_{HD}	10	–	–	ns	–
TDO Valid Delay	t_{DV}	–	–	60	ns	–

7.7.7 Differential Reference Clock Interface

Table 51 describes the CML differential reference clock output.

Table 51 Reference Clock Output Characteristics

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Reference Clock Frequency	–	-300	–	+300	ppm	–
Clock Rising Edge Rate	t_{rise}	0.62	1	2	V/ns	-150 mv to 150 mv
Clock Falling Edge Rate	t_{fall}	0.62	1	2	V/ns	-150 mv to 150 mv
Peak to Peak Jitter	$t_{ppjitter}$	0.5	1.2	1.7	ps	100 mV power noise on 1.8 V
Clock Duty Cycle	-	45	50	55	%	–
Output Voltage High	-	0.25	0.4	0.5	V	–
Output Voltage Low	-	0	0.05	0.1	V	–
Differential Output Voltage	-	500	–	900	mV	2 * $\lvert V_{CLKP}-V_{CLKN}\rvert$
Termination	-	45	–	60	Ω	

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

7.7.8 Crystal Specification

The 25 MHz crystal must follow the specification given in Table 52.

Table 52 Specification of the Crystal

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Frequency with 25 MHz Input	f_{clk25}	–	25.0	–	MHz	–
Total Frequency Stability	–	-50	–	+50	ppm	Refers to the sum of all effects: such as general tolerance, aging, and temperature dependency
Series Resonant Resistance	–	–	–	40	Ω	–
Drive Level	–	–	0.1	0.2	mW	–
Load Capacitance	C_L	16	–	26	pF	–
Shunt Capacitance	C_0	–	–	7	pF	–

data sheetare Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

7.8 External Circuitry

This section specifies the component characteristics of the external circuitry connected to the TPIs of the MxL86250C.

7.8.1 Twisted-Pair Common-Mode Rejection and Termination Circuitry

Figure 29 shows the external circuitry necessary to properly terminate the common mode of the TPI.

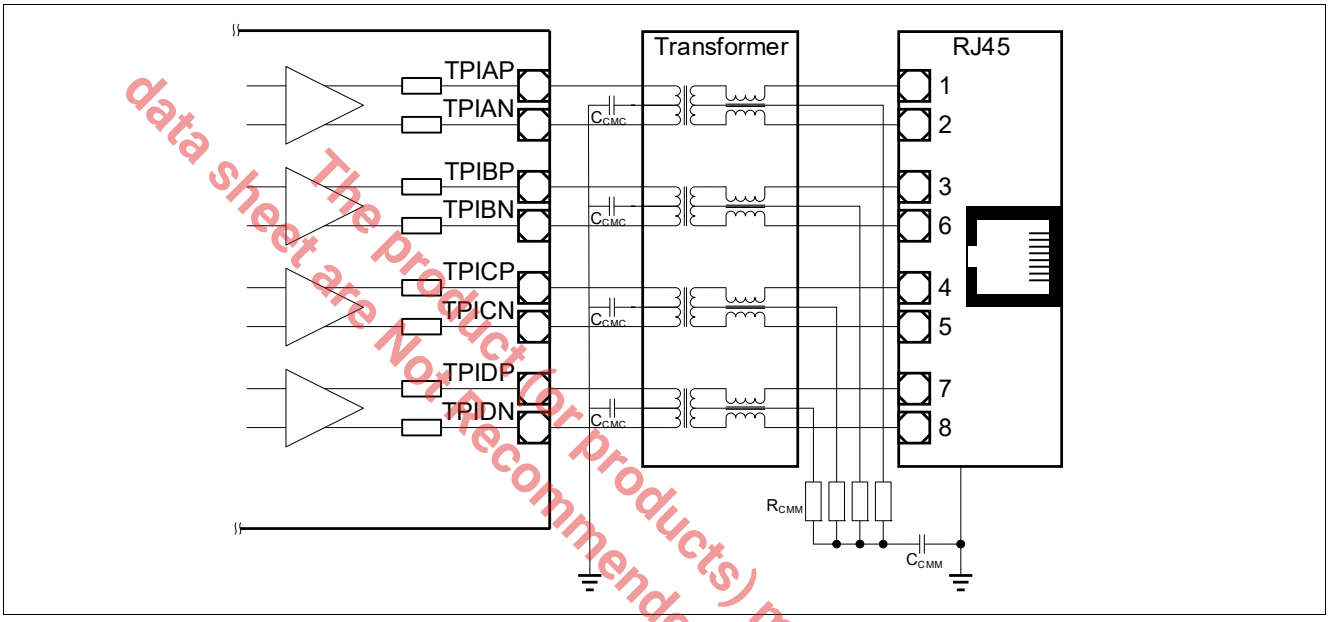


Figure 29 Twisted Pair Common-Mode Rejection and Termination Circuitry

Table 53 defines the component values and their supported tolerances.

Table 53 Electrical Characteristics for Common-Mode Rejection and Termination Circuitry

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Common-Mode Decoupling Capacitance (Media End)	C_{CMM}	800	1000	1200	pF	±15%, 3 kV
Common-Mode Decoupling Capacitance (Chip End)	C_{CMC}	80	100	120	nF	±15%, 25 V
Common-Mode Termination Resistance (Media End)	R_{CMM}	67.5	75	82.5	Ω	±5%

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

7.8.2 Transformer (Magnetics)

This section specifies the required electrical characteristics of the transformer[1)] devices that are supported. The specifications listed here guarantee proper operation according to IEEE 802.3 [2].

Figure 30 depicts a typical Gigabit Ethernet capable transformer device.

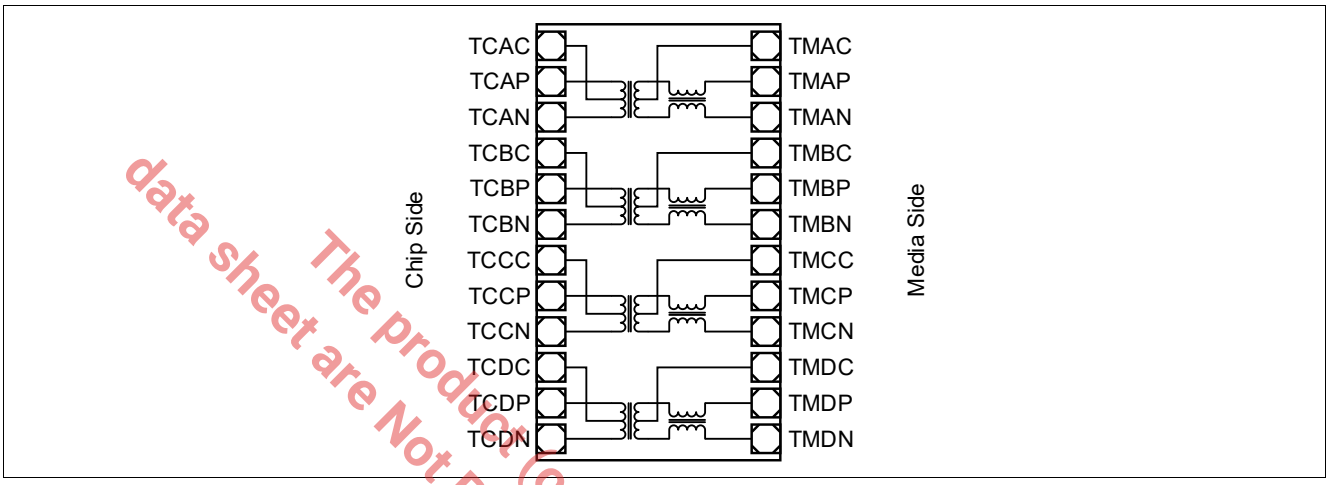


Figure 30 Schematic of an Ethernet Transformer Device

Table 54 lists the characteristics of the supported transformer devices. These characteristics represent the minimum values for achieving standard performance. Since the transformer significantly impacts the link performance, it is possible to increase the loop reach by selecting transformers with improved parameters.

Table 54 Electrical Characteristics for Supported Transformers (Magnetics)

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Turns Ratio	1:tr	0.95	1.00	1.05		±5%
Differential-to-Common-mode Rejection	DCMR	40	–	–	dB	30 MHz
		35	–	–	dB	60 MHz
		30	–	–	dB	100 MHz
Crosstalk Attenuation	CTA	45	–	–	dB	30 MHz
		40	–	–	dB	60 MHz
		35	–	–	dB	100 MHz
Insertion Loss	IL	–	–	1	dB	1 MHz ≤ f ≤ 250 MHz
Return Loss	RL	16	–	–	dB	1 MHz ≤ f ≤ 40 MHz
Return Loss	RL	16-10*log10(f/40)	–	–	dB	40 MHz ≤ f ≤ 250 MHz

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

1) Also often referred to as magnetics.

7.8.3 RJ45 Plug

Table 55 describes the electrical characteristics of the RJ45 plug to be used in conjunction with MxL86250C.

Table 55 Electrical Characteristics for Supported RJ45 Plugs

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Crosstalk Attenuation	CTA	45	–	–	dB	30 MHz
		40	–	–	dB	60 MHz
		35	–	–	dB	100 MHz
Insertion Loss	IL	–	–	1	dB	1 MHz ≤ f ≤ 250 MHz
Return Loss	RL	16	–	–	dB	1 MHz ≤ f ≤ 40 MHz
Return Loss	RL	16-10*log10(f/40)	–	–	dB	40 MHz ≤ f ≤ 250 MHz

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

8 Package Outline

The product is assembled in a PG-FCLBGA-277 package, which complies with regulations requiring lead free material. **Table 56** lists the parameters generated in accordance with JEDEC JESD51 standards **[3]**.

Table 56 JEDEC Thermal Resistance Package Parameter - Compact 2-R Model Network


Item	Name/Value
Thermal Resistance - Junction to Case Top	$R_{th,\ JCtop}$ = 0.082 K/W
Minimum Thermal Resistance - Junction to 0 mm from package edge on PCB	$R_{th,\ JB}$ = 2.70 K/W

Table 57 Stress Force Package Parameter

Item	Value
Force	1.939 kg
Pressure	1.346528 kg/cm^2
	19.15207 PSI

Data sheet are Not Recommended for New Designs (NRND) The product (or products) mentioned in this

Figure 31 shows the mechanical drawings for this package. The dimensions are in millimeters.

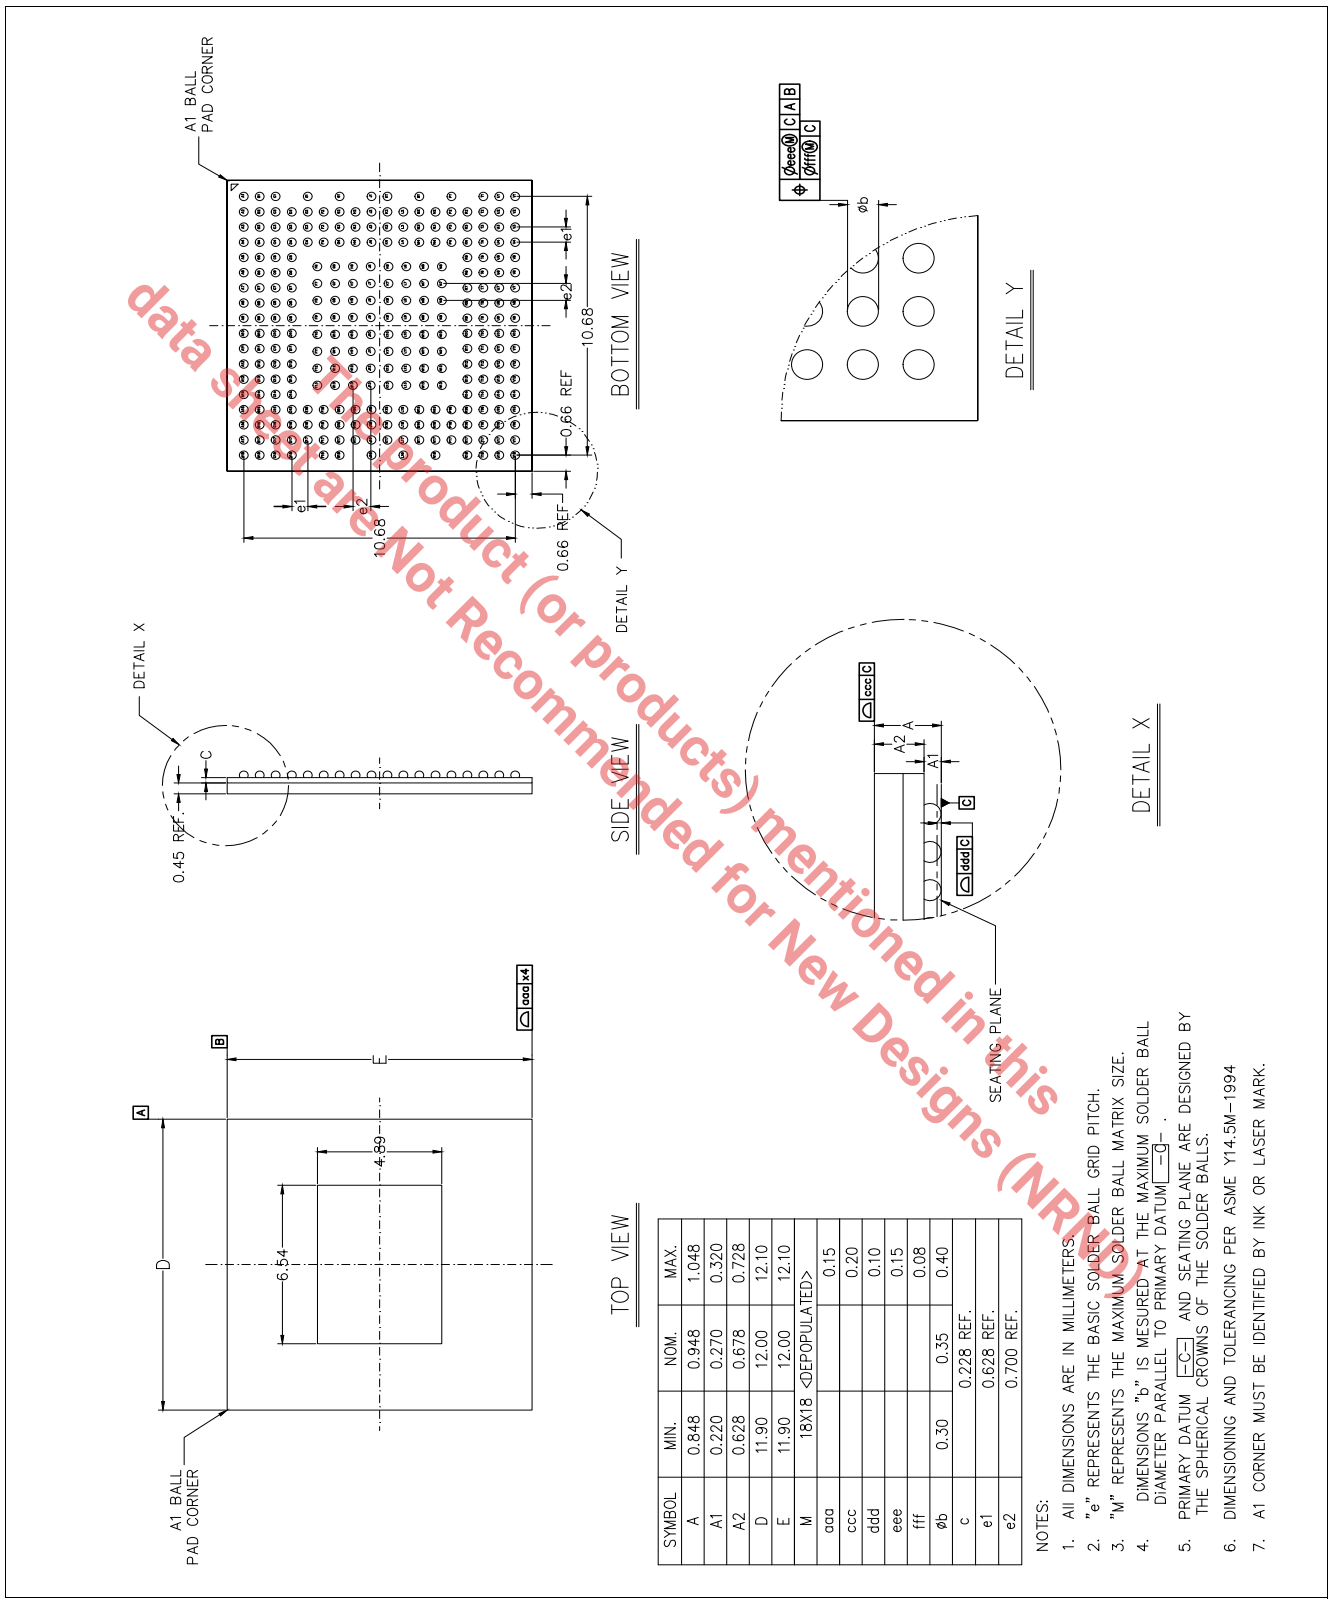

SYMBOL	MIN.	NOM.	MAX.
A	0.848	0.948	1.048
A1	0.220	0.270	0.320
A2	0.628	0.678	0.728
D	11.90	12.00	12.10
E	11.90	12.00	12.10
M	18X18 <DEPOPULATED>		
aaa			0.15
ccc			0.20
ddd			0.10
eee			0.15
fff			0.08
ϕb	0.30	0.35	0.40
e		0.228 REF.	
e1		0.628 REF.	
e2		0.700 REF.	

data Sheet are Not Recommended for New Designs (NRND)

Figure 31 PG-FCLBGA-277 12 mm x 12 mm Package Outline

9 Product Ordering Information

Table 58 provides the product ordering information.

Table 58 Product and Package Naming

Marketing Part Number	Ordering Part Number	Shipping Format	Package	Device Number[1)]	Device Revision Number[2)]	PHY Identifier[3)]
MxL86250C	MXL86250C-ABE-T	Tray	PG-FCLBGA-277	0x13	0x8	0x5538

1) LDN field in CL22 and CL45 registers.
2) LDRN field in CL22 and CL45 registers.
3) PHY Identifier 2 register 16-bit value.

Note: For more information about part numbers, as well as the most up-to-date information and additional information on environmental rating, go to https://www.maxlinear.com/products/interface/ethernet.

The Product (or products) mentioned in this data sheet are Not Recommended for New Designs (NRND)

Literature References

[1] Ethernet Switch MxL862xx Unmanaged and Managed-Attached Configuration User Guide Rev. 1.0

Attention: Refer to the latest revisions of the documents.

Standards References

[2] IEEE 802.3-2022: Carrier Sense Multiple Access with Collision Detection (CSMA/CD) Access Method and Physical Layer Specifications, IEEE Computer Society, May 2022
https://standards.ieee.org/ieee/802.3/10422/

[3] JEDEC standard, JESD 51: Methodology for the Thermal Measurement of Component Packages (Single Semiconductor Device), December 1995
https://www.jedec.org/standards-documents/docs/jesd-51

[4] Negotiated Fast Retrain, Revision 2.0, Cisco Systems, June 10th, 2011

[5] Microsoft Security Development Lifecycle
https://www.microsoft.com/en-us/securityengineering/sdl/practices

data sheet are Not Recommended for New Designs (NRND)
The product (or products) mentioned in this

Terminology

A	
ADS	Auto-Downspeed
AFE	Analog Front End
ANEG	Auto-Negotiation
ANSI	American National Standards Institute
ASP	Analog Signal Processing
B	
BW	Bandwidth
C	
Cat 5	Category 5 Cabling
CDB	Clock Distribution Block
CDR	Clock and Data Recovery
CML	Current Mode Logic
D	
DSP	Digital Signal Processing
DWRR	Deficit Weighted Round Robin
E	
EEE	Energy-Efficient Ethernet
EEPROM	Electrically Erasable Programmable ROM
EMI	Electromagnetic Interference
ESD	Electrostatic Discharge
F	
FCA	Flash Configuration Area
FCS	Frame Check Sequence
FLP	Fast Link Pulse
G	
GMII	Gigabit Media-Independent Interface
GPIO	General Purpose Input/Output
H	
HBM	Human Body Model
I	
I^2C	Internally Integrated Circuit Interface (also I2C)
IC	Integrated Circuit
IEEE	Institute of Electrical and Electronics Engineers
J	
JTAG	Joined Test Action Group
L	
LAG	Link Aggregation Group

The product (or products) mentioned in this data sheet are Not Recommended for New Designs (NRND)

LAN	Local Area Network
LED	Light Emitting Diode
LJPLL	Low Jitter Phase-Locked Loop
LPI	Low Power Idle
LSB	Least Significant Bit
M	
MAC	Media Access Controller
MDI	Media-Dependent Interface
MDIO	Management Data Input/Output
MDIX	Media-Dependent Interface Crossover
MMD	MDIO Manageable Device
MSB	Most Significant Bit
N	
NLP	Normal Link Pulse
O	
OSI	Open Systems Interconnection
OUI	Organizationally Unique Identifier
P	
PCB	Printed Circuit Board
PCS	Physical Coding Sublayer
PD	Power Down
PFC	Priority Flow Control
PHY	Physical Layer (device)
PLL	Phase-Locked Loop
PMA	Physical Media Attachment
Q	
QSPI	Quad Serial Peripheral Interface
R	
Rx	Receive
S	
SerDes	Serializer-Deserializer
SFP	Small Form-Factor Pluggable
SMD	Surface Mounted Device
SoC	System on Chip
SP	Strict Priority
STA	Station Management Entity (MAC SoC)
SVN	Security Version Number
T	
TLE	Transformerless Ethernet
TPG	Test Packet Generator

The product (or products) mentioned in this data sheet are Not Recommended for New Designs (NRND)

TPI	Twisted Pair Interface
Tx	Transmit
W	
WoL	Wake-on-LAN
WRED	Weighted Random Early Detection
X	
XO	Crystal Oscillator

The product (or products) mentioned in this data sheet are Not Recommended for New Designs (NRND)