



## General Description

The MxL9368x (MxL93682 and MxL93683) are highly integrated PAM4 DSP SoCs that enable 800Gbps optical interconnects using 100Gbps over a single optical wavelength ( $100G/\lambda$ ).

The devices have a high-speed electrical interface with eight transmit (Tx) and receive (Rx) input/output (I/O) that connect electrically through a module connector to the host ASIC.

The devices also have a high-speed optical side interface that has eight Tx and Rx I/O that connect through the optical components to optical fibers.

The electrical interface supports 106.25Gbps PAM4 signaling per lane over C2M host channels.

The optical interface supports 106.25Gbps PAM4 signaling per wavelength for DR, FR, and LR applications.

The devices support DSP functions including line side Tx digital pre-distortion (DPD), transmit pre-emphasis (Tx FIR), and receive feed-forward equalization (Rx FFE).

The MxL9368x, in a 12mm × 13mm package, includes integrated TOSA drivers with differential and single-ended options for both silicon photonics (SiPh) and electro-absorption modulated laser (EML) implementations. It offers exceptional signal integrity for signals in a compact footprint suitable for next generation optical module form-factors.

## Applications

- QSFP-DD800 optical modules
- OSFP optical modules
- QSFP-DD800 AEC/ACC and AOC
- OSFP AEC/ACC and AOC

## Features

- 800G retimer capability that enables 800G DR8, 2×FR4, 2×LR4, 2×VR4/SR4
- 800G to 100G break-out mode
- Backward compatible to 8×53.125Gbps (PAM4) and 8×25.78125Gbps (NRZ) operating modes
- Support for mixed channel operating rates (that is, 4×106.25Gbps + 4×53.125Gbps)
- Full 8 × 8 crossbar functionality
- Tx equalization that includes pre-emphasis, digital pre-distortion, and reflection cancellation
- Rx equalization that includes CTLE, multi-tap FFE, and reflection cancellation
- Supports host channels with Nyquist loss in excess of 20dB
- Integrated crystal oscillator that eliminates the need for a costly reference clock source
- Small package size to enable the QSFP-DD800 space requirements
- Mission mode BER monitoring
- SNR/Histogram reporting for each receiver on both electrical and optical interfaces
- Diagnostic loop-back and test pattern generation and error checking
- SPI and I<sup>2</sup>C slave interface to communicate to module MCU
- SPI master for flash memory interface
- I<sup>2</sup>C master interface for TIA direct control
- Embedded CPU for real-time control
- Squelch function when loss of signal (LOS) or loss of lock (LOL) is detected

## Supported Standards

- IEEE Std 802.3bs
- IEEE Std 802.3cd
- IEEE Std 802.3ck
- IEEE Std 802.3cm
- IEEE Std 802.3cu
- IEEE Std 802.3db
- IEEE Std 802.3df


## Introduction

The MxL9368x device is a highly integrated PAM4 DSP SoC that operates at a capacity of 800G and enables 100G for each optical wavelength. The SoC includes Tx DPD, Tx pre-emphasis (Tx FIR), Rx equalization (FFE) functionality, and a full 8 × 8 crossbar with broadcast capability. Additional mission mode BER monitoring capabilities are also available.

The main mode of operation is the retiming mode: the bit streams are forwarded between electrical and optical serializer/deserializer (SerDes) interfaces on a one-to-one basis. The bit streams are PAM-4 encoded.

## IC Block Diagram

Figure 1 shows the functional block diagram of the MxL93682 device. The MxL93683 device is similar, however the output driver is not included in the optical Tx output block.

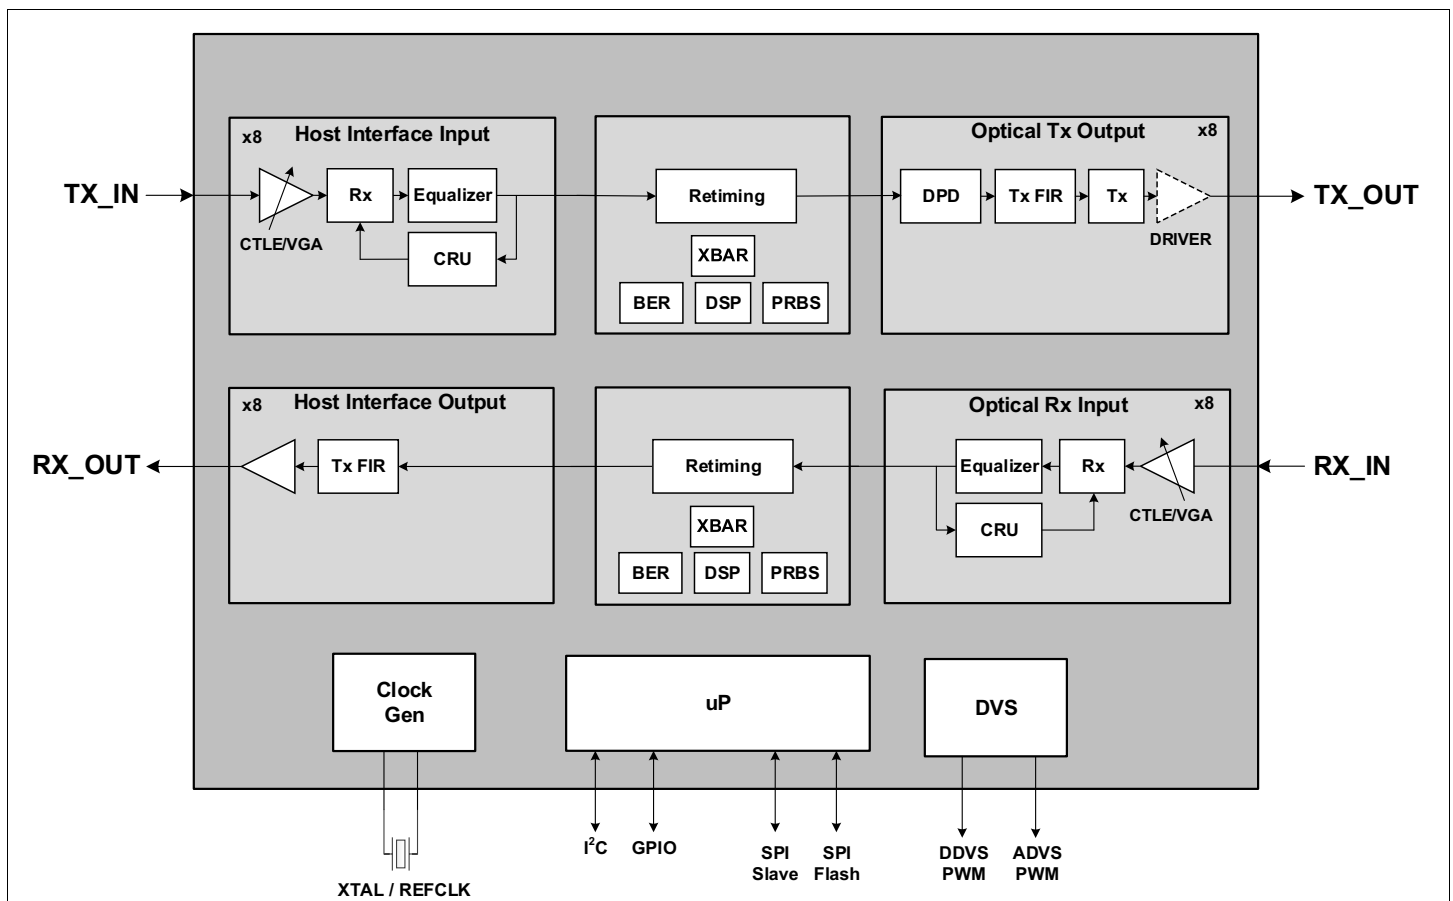

**Figure 1: MxL93682 Simplified Block Diagram**

## Ordering Information

**Table 1: Ordering Information**

Marketing Part Number	Ordering Part Number	Description	Package	Shipping
MxL93682	MXL93682-PV-T	800G DSP with integrated driver	FC-FBGA	Tray
MxL93683	MXL93683-PV-T	800G DSP without integrated driver	FC-FBGA	Tray



MaxLinear, Inc.  
5966 La Place Court, Suite 100  
Carlsbad, CA 92008  
Tel.: +1 (760) 692-0711  
Fax: +1 (760) 444-8598

[www.maxlinear.com](http://www.maxlinear.com)

The content of this document is furnished for informational use only, is subject to change without notice, and should not be construed as a commitment, representation, or warranty by MaxLinear, Inc. or any of its affiliates (collectively, "MaxLinear"). MaxLinear assumes no responsibility or liability for any errors, omissions, or inaccuracies that may appear in the informational content contained in this document.

Reproduction, distribution, modification, or creation of derivative works, in part or in whole, without the express prior written consent of MaxLinear is prohibited. MaxLinear, the MaxLinear logo, and any other MaxLinear trademarks (including but not limited to MxL, Full-Spectrum Capture, FSC, AirPHY, Puma, AnyWAN, VectorBoost, MXL WARE, and Panther) are all property of MaxLinear and/or its subsidiaries in the U.S.A. and other countries. All rights reserved. All third-party marks and logos are trademarks™ or registered® trademarks of their respective holders/owners.

© 2026 MaxLinear, Inc. All rights reserved.