



## General Description

The MxL82207 is a 16-bit GPIO expander with an I<sup>2</sup>C/SMBus interface. After power-up, the MxL82207 has internal 100K $\Omega$  pull-up resistors on each I/O pin that can be individually enabled.

In addition, the GPIOs on the MxL82207 can individually be controlled and configured. As outputs, the GPIOs can be outputs that are high, low, or in three-state mode. The three-state mode feature is useful for applications where the power is removed from the remote devices, but they may still be connected to the GPIO expander.

As inputs, the internal pull-up resistors can be enabled or disabled and the input polarity can be inverted. The interrupt behavior is configurable. It can be set to trigger on a rising edge, falling edge, or both edges. The interrupt condition is cleared either when the input returns to its original state or when the current input state is read.

The MxL82207 is an enhanced version of the TCA6416. The MxL82207 is pin and software compatible with the TCA6416.

The MxL82207 is available in 24-pin QFN and 24-pin TSSOP packages.

## Applications

- Personal digital assistants (PDA)
- Cellular phones/data devices
- Battery-operated devices
- Global Positioning System (GPS)
- Bluetooth

## Features

- 1.62V to 5.5V operating voltage
- Integrated Level Shifters
- 16 General Purpose I/Os (GPIOs)
- Maximum stand-by current of 1 $\mu$ A at +1.8V
- I<sup>2</sup>C/SMBus bus interface
  - I<sup>2</sup>C clock frequency up to 1MHz
  - Noise filter on SDA and SCL inputs
  - Up to 4 I<sup>2</sup>C Slave addresses
- Individually programmable inputs
  - Internal pull-up resistors
  - Polarity inversion
  - Individual interrupt enable
  - Rising edge and/or falling edge interrupt
  - Input filter
- Individually programmable outputs
  - Output level control
  - Output three-state control
- Open-drain active-low reset input
- Pin and software compatible with *TCA6416*
- 3kV HBM ESD protection per *JESD22-A114F*
- 200mA latch-up performance per *JESD78B*

## Revision History

Document No.	Release Date	Change Description
297DSR00	May 20, 2026	Initial preliminary release.

# Table of Contents

<b>General Description</b> .....	<b>i</b>
<b>Applications</b> .....	<b>i</b>
<b>Features</b> .....	<b>i</b>
<b>Specifications</b> .....	<b>1</b>
Absolute Maximum Ratings .....	1
Electrical Characteristics .....	2
DC Electrical Characteristics .....	2
AC Electrical Characteristics .....	3
<b>Pin Information</b> .....	<b>4</b>
Pin Configuration .....	4
Pin Description .....	4
<b>Block Diagram</b> .....	<b>6</b>
<b>Functional Description</b> .....	<b>7</b>
I <sup>2</sup> C-Bus Interface .....	7
I <sup>2</sup> C-Bus Addressing .....	8
I2C Read and Write .....	8
I2C Command Byte .....	9
Interrupts .....	10
<b>Register Description</b> .....	<b>11</b>
GPIO State Register 1 (GSR1)—Read Only .....	11
GPIO State Register 2 (GSR2)—Read Only .....	11
Output Control Register 1 (OCR1)—Read/Write .....	11
Output Control Register 2 (OCR2)—Read/Write .....	11
Input Polarity Inversion Register 1 (PIR1)—Read/Write .....	11
Input Polarity Inversion Register 2 (PIR2)—Read/Write .....	11
GPIO Configuration Register 1 (GCR1)—Read/Write .....	12
GPIO Configuration Register 2 (GCR2)—Read/Write .....	12
Input Internal Pull-up Enable/Disable Register 1 (PUR1)—Read/Write .....	12
Input Internal Pull-up Enable/Disable Register 2 (PUR2)—Read/Write .....	12
Input Interrupt Enable Register 1 (IER1)—Read/Write .....	12
Input Interrupt Enable Register 2 (IER2)—Read/Write .....	12
Output Three-State Control Register 1 (TSCR1)—Read/Write .....	12
Output Three-State Control Register 2 (TSCR2)—Read/Write .....	12
Input Interrupt Status Register 1 (ISR1)—Read Only .....	13
Input Interrupt Status Register 2 (ISR2)—Read-Only .....	13

Input Rising Edge Interrupt Enable Register 1 (REIR1)—Read/Write..... 13

Input Rising Edge Interrupt Enable Register 2 (REIR2)—Read/Write..... 13

Input Falling Edge Interrupt Enable Register 1 (FEIR1)—Read/Write ..... 13

Input Falling Edge Interrupt Enable Register 2 (FEIR2)—Read/Write ..... 13

Input Filter Enable Register 1 (IFR1)—Read/Write ..... 14

Input Filter Enable Register 2 (IFR2)—Read/Write ..... 14

**Mechanical Dimensions..... 15**

    TSSOP-24 ..... 15

    QFN-24..... 16

**Ordering Information..... 17**

## List of Figures

Figure 1: Pinout (Top View).....	4
Figure 2: Functional Block Diagram .....	6
Figure 3: I <sup>2</sup> C Start and Stop Conditions .....	7
Figure 4: Master Writes to Slave .....	7
Figure 5: Master Reads from Slave.....	7
Figure 6: TSSOP-24 Mechanical Dimensions .....	15
Figure 7: QFN-24 Mechanical Dimensions.....	16

## List of Tables

Table 1: Absolute Maximum Ratings .....	1
Table 2: DC Electrical Characteristics .....	2
Table 3: DC Electrical Characteristics .....	3
Table 4: Pin Description .....	4
Table 5: I <sup>2</sup> C Address Map .....	8
Table 6: I <sup>2</sup> C Command Byte (Register Address).....	9
Table 7: Interrupt Generation and Clearing .....	10
Table 8: Ordering Information.....	17

## Specifications

### Absolute Maximum Ratings

**Important:** The stresses above what is listed under the following table may cause permanent damage to the device. This is a stress rating only—functional operation of the device above what is listed under the following table or any other conditions beyond what MaxLinear recommends is not implied. Exposure to conditions above the recommended extended periods of time may affect device reliability.

**Table 1: Absolute Maximum Ratings**

Parameter	Min	Max	Units
Power Supply Voltage	-	6	V
Supply Current	-	160	mA
Ground Current	-	200	mA
External Current Limit of each GPIO	-	25	mA
Total Current Limit for GPIO[15:8] and GPIO[7:0]	-	100	mA
Total Current Limit for GPIO[15:0]	-	200	mA
Total Supply Current sourced by all GPIOs	-	160	mA
Operating Temperature	-40	+85	°C
Storage Temperature	-65	+150	°C
Power Dissipation	-	200	mW

## Electrical Characteristics

### DC Electrical Characteristics

DC Electrical characteristics at  $V_{CC} = 1.62V$  to  $5.5V$ ,  $T_A = 40^{\circ}C$  to  $+85^{\circ}C$ , unless otherwise specified.

**Table 2: DC Electrical Characteristics**

Symbol	Parameter	Limits $1.8V \pm 10\%$		Limits $2.5V \pm 10\%$		Limits $3.3V \pm 10\%$		Limits $5V \pm 10\%$		Units	Conditions
		Min	Max	Min	Max	Min	Max	Min	Max		
$V_{IL}$	Input Low Voltage	-0.3	0.3VCC	-0.3	0.3VCC	-0.3	0.3VCC	-0.3	0.3×VCC	V	Note 1
$V_{IL}$	Input Low Voltage	-0.3	0.2	-0.3	0.5	-0.3	0.8	-0.3	1.1	V	Note 2
$V_{IH}$	Input High Voltage	1.3	VCC	1.8	VCC	2.3	VCC	0.7×VCC	VCC	V	Note 1
$V_{IH}$	Input High Voltage	1.4	5.5	1.8	5.5	2.0	5.5	2.3	5.5	V	Note 2
$V_{OL}$	Output Low Voltage	0	0.4	0	0.4	0	0.4	0	0.4	V	$I_{OL} = 3mA$ Note 3
$V_{OL}$	Output Low Voltage	0	0.5	0	0.5	0	0.5	0	0.5	V	$I_{OL} = 8mA$ Note 4
$V_{OL}$	Output Low Voltage	0	0.4	0	0.4	0	0.4	0	0.4	V	$I_{OL} = 1.5mA$ $I_{OL} = 4mA$ $I_{OL} = 6mA$ Note 5
$V_{OH}$	Output High Voltage	1.2	-	1.8	-	2.6	-	4.1	-	V	$I_{OH} = -8mA$ Note 4
$I_{IL}$	Input Low Leakage Current	-	±10	-	±10	-	±10	-	±10	μA	-
$I_{IH}$	Input High Leakage Current	-	±10	-	±10	-	±10	-	±10	μA	-
$I_{CC}$	Power Supply Current	-	50	-	100	-	200	-	400	μA	Note 6
$I_{CC}$	Power Supply Current	-	150	-	250	-	500	-	1000	μA	Note 7
$I_{CCS}$	Standby Current	-	1	-	2	-	5	-	7	μA	Note 8
$C_{IN}$	Input Pin Capacitance	-	5	-	5	-	5	-	5	pF	-
$R_{GPIO}$	GPIO pull-up Resistance	60	140	60	140	60	140	60	140	kΩ	100kΩ ±40%
$R_{RESET\#}$	Pull-up Resistance	35	85	35	85	35	85	35	85	KΩ	60kΩ ±40%

1. For I<sup>2</sup>C input signals (SDA, SCL).

2. For GPIOs, A0, A1, and A2 signals.

3. For I<sup>2</sup>C output signal SDA.

4. For GPIOs.

5. For IRQ# signal

6. Test 1: SCL frequency is 1MHz with internal pull-ups disabled. All GPIOs are configured as inputs. All inputs are steady at VCC or GND. Outputs are floating or in the tri-state mode.

7. Test 2: SCL frequency is 1MHz with internal pull-ups enabled. All GPIOs are configured as inputs. All inputs are steady at VCC or GND. Outputs are floating or in the tri-state mode.

8. Test 3: All inputs are steady at VCC or GND to minimize standby current. If internal pull-up is enabled, input voltage level should be the same as VCC. All GPIOs are configured as inputs. SCL and SDA are at VCC. Outputs are left floating or in tri-state mode.

## AC Electrical Characteristics

AC Electrical characteristics at  $V_{CC} = 1.62V$  to  $5.5V$ ,  $T_A = 40^{\circ}C$  to  $+85^{\circ}C$ , unless otherwise specified.

**Table 3: DC Electrical Characteristics**

Symbol	Parameter	Standard Mode I <sup>2</sup> C-Bus		Fast Mode I <sup>2</sup> C-Bus		Fast Mode Plus I <sup>2</sup> C-Bus		Units
		Min	Max	Min	Max	Min	Max	
$f_{SCL}$	Operating Frequency	0	100	0	400	0	1000	kHz
$T_{BUF}$	Bus Free Time between STOP and START	4.7	-	1.3	-	0.5	-	$\mu s$
$T_{HD;STA}$	START Condition Hold Time	4.0	-	0.6	-	0.26	-	$\mu s$
$T_{SU;STA}$	START Condition Setup Time	4.7	-	0.6	-	0.26	-	$\mu s$
$T_{HD;DAT}$	Data Hold Time	0	-	0	-	0	-	ns
$T_{VD;ACK}$	Data Valid Acknowledge	-	0.6	-	0.6	-	0.45	$\mu s$
$T_{VD;DAT}$	SCL Low to Data Out Valid	-	0.6	-	0.6	-	0.45	ns
$T_{SU;DAT}$	Data Setup Time	250	-	150	-	50	-	ns
$T_{LOW}$	Clock Low Period	4.7	-	1.3	-	0.5	-	$\mu s$
$T_{HIGH}$	Clock High period	4.0	-	0.6	-	0.26	-	$\mu s$
$T_F$	Clock/Data Fall Time	-	300	-	300	-	120	ns
$T_R$	Clock/Data Rise Time	-	1000	-	300	-	120	ns
$T_{SP}$	Pulse Width of Spikes Tolerance	50	-	50	-	-	50	ns
$T_{D1}$	I <sup>2</sup> C-Bus GPIO Output Valid	-	0.2	-	0.2	-	0.2	$\mu s$
$T_{D4}$	I <sup>2</sup> C Input Pin Interrupt Valid	-	4	-	4	-	4	$\mu s$
$T_{D5}$	I <sup>2</sup> C Input Pin Interrupt Clear	-	4	-	4	-	4	$\mu s$
$T_{D15}$	SCL Delay after Reset	3	-	3	-	3	-	$\mu s$

## Pin Information

### Pin Configuration

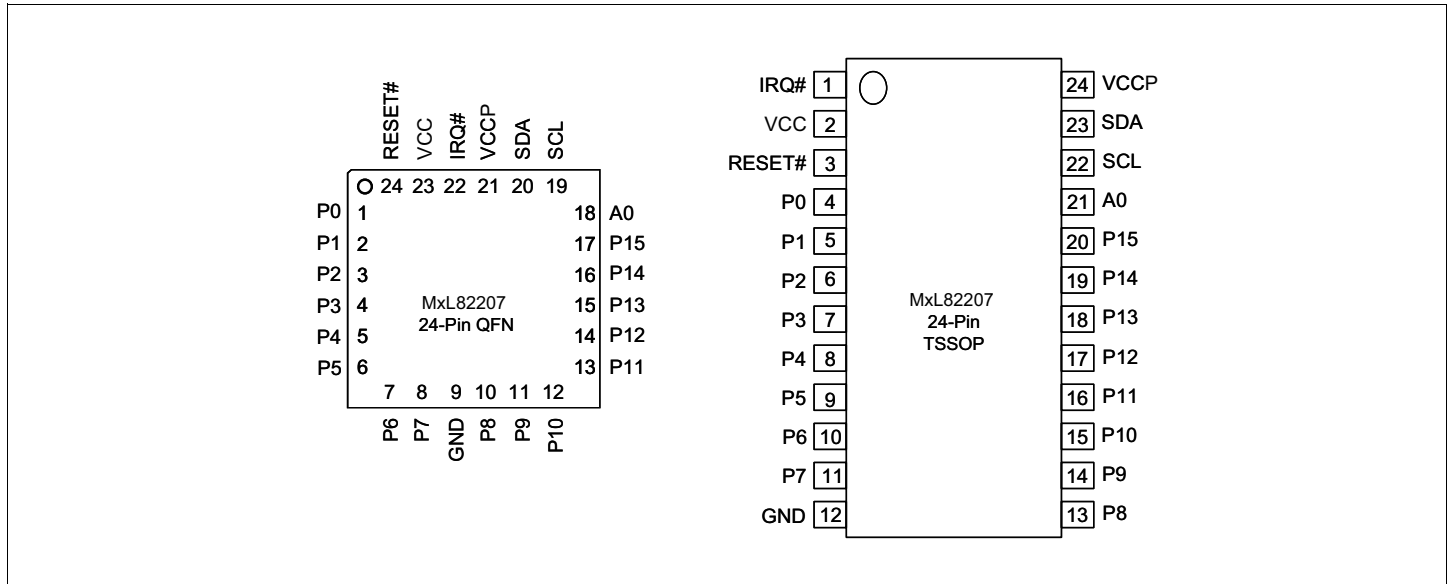


Figure 1: Pinout (Top View)

### Pin Description

Table 4: Pin Description


Pin Name	QFN-24 PIN#	TSSOP-24 PIN#	Type	Description
<b>I<sup>2</sup>C Interface</b>				
SDA	20	23	I/O	I <sup>2</sup> C-bus data input/output (open-drain).
SCL	19	22	I	I <sup>2</sup> C-bus serial input clock.
IRQ#	22	1	OD	Interrupt output (open-drain, active low).
A0	18	21	I	These pins select the I <sup>2</sup> C slave address. See Table 5 on page 8.
RESET#	24	3	I	Reset (active low) - A longer than 40ns low pulse on this pin resets the internal registers and all GPIOs are configured as inputs.
<b>GPIOs</b>				
P0	1	4	I/O	General purpose I/Os P0-P7. All GPIOs are configured as inputs upon power-up or after a reset.
P1	2	5	I/O	
P2	3	6	I/O	
P3	4	7	I/O	
P4	5	8	I/O	
P5	6	9	I/O	
P6	7	10	I/O	
P7	8	11	I/O	

**Table 4: Pin Description**

Pin Name	QFN-24 PIN#	TSSOP-24 PIN#	Type	Description
P8	10	13	I/O	General purpose I/O P8-P15. All GPIOs are configured as inputs upon power-up or after a reset.
P9	11	14	I/O	
P10	12	15	I/O	
P11	13	16	I/O	
P12	14	17	I/O	
P13	15	18	I/O	
P14	16	19	I/O	
P15	17	20	I/O	
Ancillary Signals				
VCCP	21	24	Pwr	1.62V to 5.5V VCC supply voltage for GPIOs.
VCC	23	2	Pwr	1.62V to 5.5V supply for I <sup>2</sup> C-bus interface.
GND	9	12	Pwr	Power supply common, ground.
GND	Center Pad	-	Pwr	The exposed pad at the bottom surface of the package is designed for thermal performance. Use of a center pad on the PCB is strongly recommended for thermal conductivity as well as to provide mechanical stability of the package on the PCB. The center pad is recommended to be solder masked defined with opening size less than or equal to the exposed thermal pad on the package bottom to prevent solder bridging to the outer leads of the device. Thermal vias must be connected to GND plane as the thermal pad of package is at GND potential.

**Note:** Pin type: I = Input, O = Output, I/O = Input/output, OD = Output Open Drain.

# Block Diagram

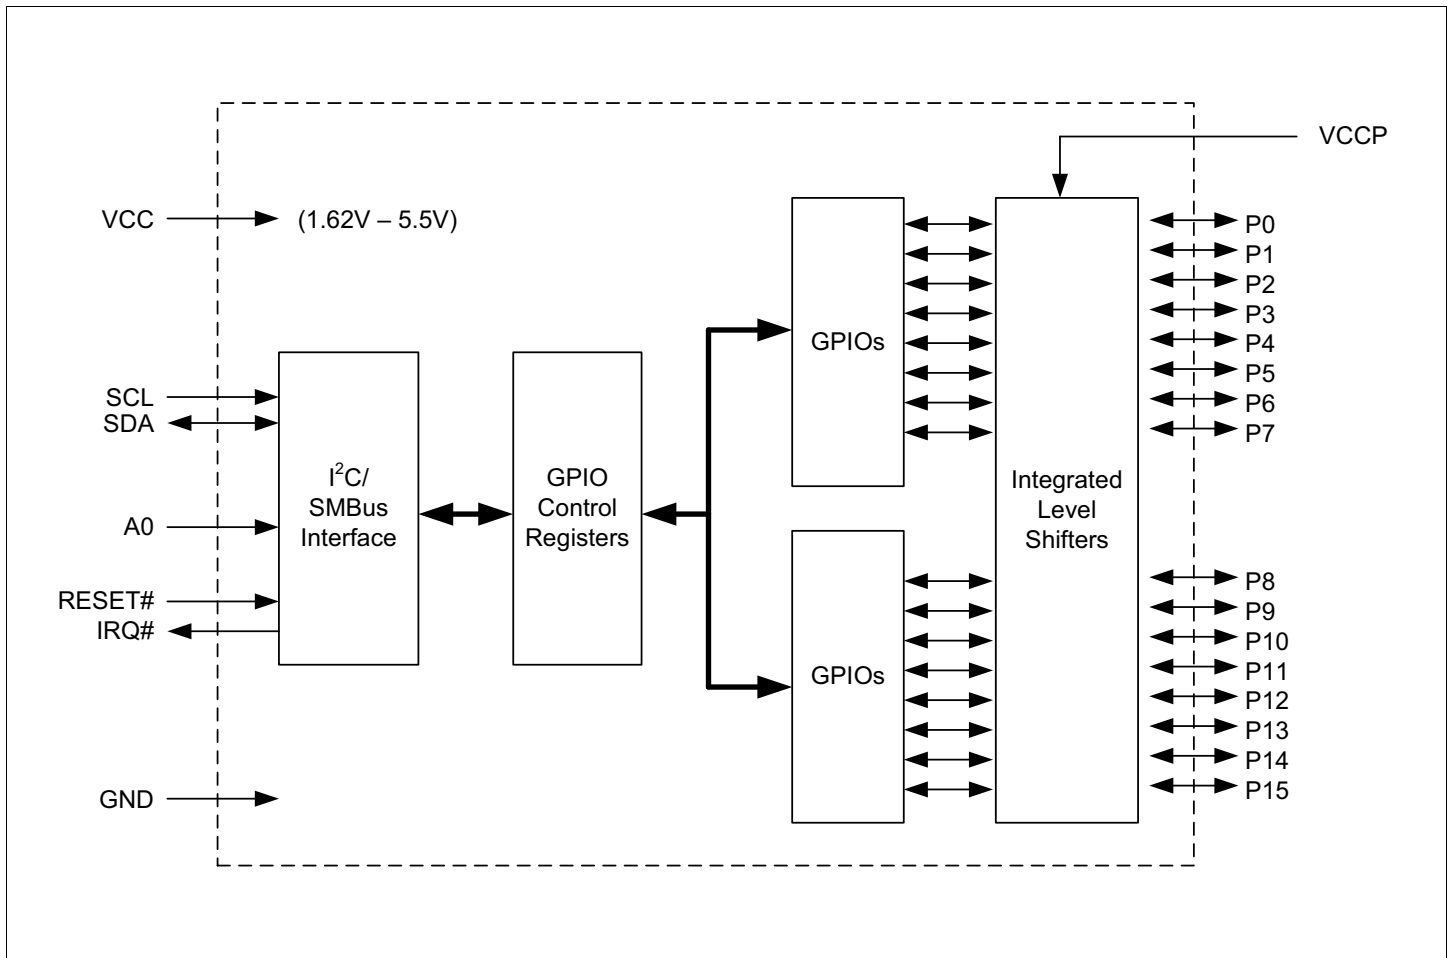


**Figure 2: Functional Block Diagram**

# Functional Description


## I<sup>2</sup>C-Bus Interface

The I<sup>2</sup>C-bus interface is compliant with the Standard-mode and fast-mode I<sup>2</sup>C-bus specifications. The I<sup>2</sup>C-bus interface consists of two lines: serial data (SDA) and serial clock (SCL). In the standard-mode, the serial clock and serial data can go up to 100kbps and in the fast-mode, the serial clock and serial data can go up to 400kbps.


The first byte sent by an I<sup>2</sup>C-bus master contains a start bit (SDA transition from *high* to *low* when SCL is *high*), 7-bit slave address and whether it is a read or write transaction. The next byte is the sub-address that contains the address of the register to access. The MxL82207 device respond to each write with an acknowledge (SDA driven *low* by MxL82207 for one clock cycle when SCL is *high*). The last byte sent by an I<sup>2</sup>C-bus master contains a stop bit (SDA transition from *low* to *high* when SCL is *high*). See the following figures. For complete details, refer to the I<sup>2</sup>C-bus specifications.

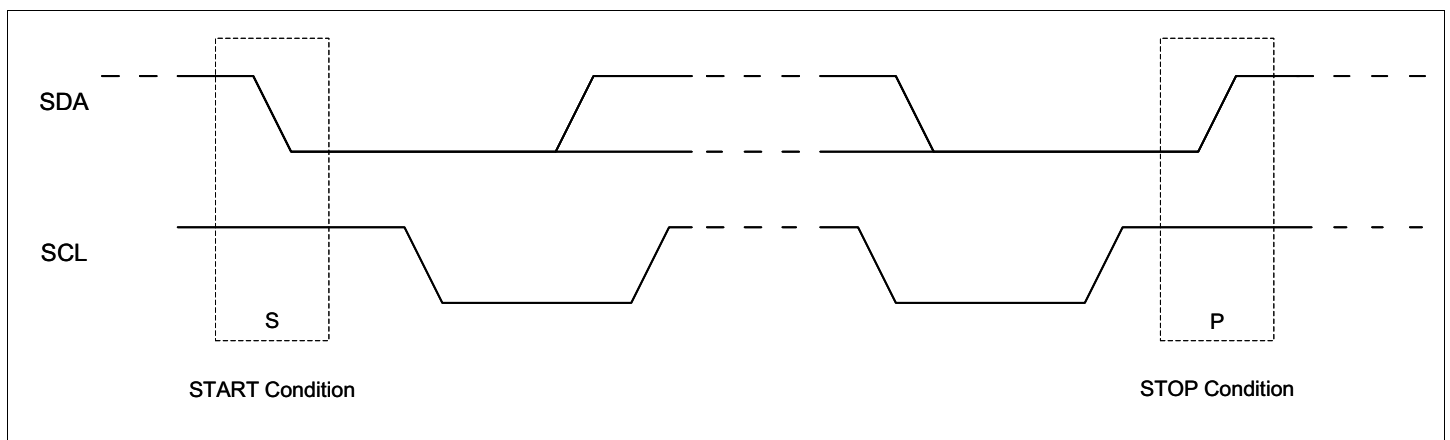

**Figure 3: I<sup>2</sup>C Start and Stop Conditions**

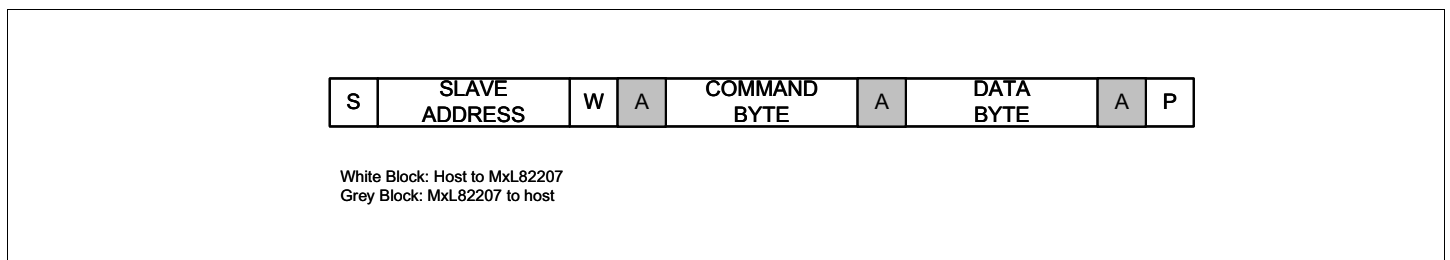

**Figure 4: Master Writes to Slave**

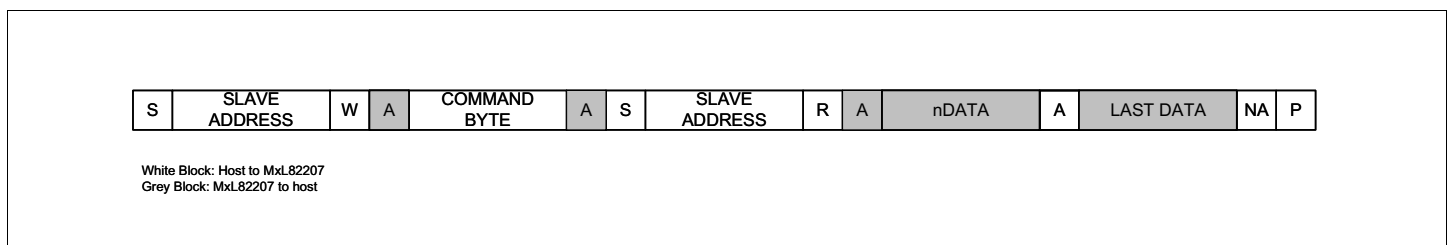

**Figure 5: Master Reads from Slave**

## I<sup>2</sup>C-Bus Addressing

There can be different devices on the I<sup>2</sup>C-bus. To distinguish itself from the other devices on the I<sup>2</sup>C-bus, the MxL82207 has up to 4 I<sup>2</sup>C slave addresses using the A0 address line. The following table lists the different addresses that can be selected.

**Table 5: I<sup>2</sup>C Address Map**

A0	I <sup>2</sup> C Address
GND	0x40 (0100 000X)
VCC	0x42 (0100 001X)
SCL	0x50 (0101 000X)
SDA	0x52 (0101 001X)

## I<sup>2</sup>C Read and Write

A read or write transaction is determined by bit-0 of the slave address. If bit-0 is 0, then it is a write transaction. If bit-0 is 1, then it is a read transaction.

## I<sup>2</sup>C Command Byte

An I<sup>2</sup>C command byte is sent by the I<sup>2</sup>C master following the slave address. The command byte indicates the address offset of the register that is accessed. The following table lists the command bytes for each register.

**Table 6: I<sup>2</sup>C Command Byte (Register Address)**

Command Byte	Register Name Description	Read/Write	Default Values
0x00	GSR1—GPIO State for P0-P7	Read-Only	0xXX
0x01	GSR2—GPIO State for P8-P15	Read-Only	0xXX
0x02	OCR1—Output Control for P0-P7	Read/Write	0xFF
0x03	OCR2—Output Control for P8-P15	Read/Write	0xFF
0x04	PIR1—Input Polarity Inversion for P0-P7	Read/Write	0x00
0x05	PIR2—Input Polarity Inversion for P8-P15	Read/Write	0x00
0x06	GCR1—GPIO Configuration for P0-P7	Read/Write	0xFF
0x07	GCR2—GPIO Configuration for P8-P15	Read/Write	0xFF
0x08	PUR1—Input Internal Pull-up Resistor Enable/Disable for P0-P7	Read/Write	0x00
0x09	PUR2—Input Internal Pull-up Resistor Enable/Disable for P8-P15	Read/Write	0x00
0x0A	IER1—Input Interrupt Enable for P0-P7	Read/Write	0x00
0x0B	IER2—Input Interrupt Enable for P8-P15	Read/Write	0x00
0x0C	TSCR1—Output Three-State Control for P0-P7	Read/Write	0x00
0x0D	TSCR2—Output Three-State Control for P8-P15	Read/Write	0x00
0x0E	ISR1—Input Interrupt Status for P0-P7	Read	0x00
0x0F	ISR2—Input Interrupt Status for P8-P15	Read	0x00
0x10	REIR1—Input Rising Edge Interrupt Enable for P0-P7	Read/Write	0x00
0x11	REIR2—Input Rising Edge Interrupt Enable for P8-P15	Read/Write	0x00
0x12	FEIR1—Input Falling Edge Interrupt Enable for P0-P7	Read/Write	0x00
0x13	FEIR2—Input Falling Edge Interrupt Enable for P8-P15	Read/Write	0x00
0x14	IFR1—Input Filter Enable/Disable for P0-P7	Read/Write	0xFF
0x15	IFR2—Input Filter Enable/Disable for P8-P15	Read/Write	0xFF

## Interrupts

The following table lists the interrupt behavior of the different register settings for the MxL82207 device.

**Table 7: Interrupt Generation and Clearing**

GCR Bit	IER Bit	REIR Bit	FEIR Bit	IFR Bit	Interrupt Generated By	Interrupt Cleared By
1	0	X	X	X	No interrupts enabled (default).	N/A.
1	1	0	0	0	A rising or falling edge on the input.	Reading the GSR register or if the input changes back to its previous state (state of input during last read to GSR).
				1	A rising or falling edge on the input and remains in the new state for more than 1075ns.	
1	1	1	0	0	A rising edge on the input.	Reading the GSR register.
				1	A rising edge on the input and remains high for more than 1075ns.	
1	1	0	1	0	A falling edge on the input.	Reading the GSR register.
				1	A falling edge on the input and remains low for more than 1075ns.	
1	1	1	1	0	A rising or falling edge on the input.	Reading the GSR register.
				1	A rising or falling edge on the input and remains in the new state for more than 1075ns.	
0	x	x	x	x	No interrupts in output mode.	N/A

## Register Description

### GPIO State Register 1 (GSR1)—Read Only

The status of P7–P0 can be read via this register. A read shows the current state of these pins (or the inverted state of these pins if enabled via the PIR register). Reading this register clears an input interrupt (For complete details, see [Table 7](#) on page 10). Reading this register also returns the last value written to the OCR register for any pins that are configured as outputs (that is, this is not the same as the state of the actual output pin since the output pin can be in three-state mode). A write to this register has no effect. The MSB of this register corresponds with P7 and the LSB of this register corresponds with P0.

### GPIO State Register 2 (GSR2)—Read Only

The status of P15–P8 can be read via this register. A read shows the current state of these pins (or the inverted state of these pins if enabled via the PIR register). Reading this register clears an input interrupt (For complete details, see [Table 7](#) on page 10). Reading this register also returns the last value written to the OCR register for any pins that are configured as outputs (that is, this is not the same as the state of the actual output pin since the output pin can be in three-state mode). A write to this register has no effect. The MSB of this register corresponds with P15 and the LSB of this register corresponds with P8.

### Output Control Register 1 (OCR1)—Read/Write

When P7–P0 are defined as outputs, they can be controlled by writing to this register. Reading this register returns the last value written to it, however, this value may not be the actual state of the output pin since these pins can be in three-state mode. The MSB of this register corresponds with P7 and the LSB of this register corresponds with P0.

### Output Control Register 2 (OCR2)—Read/Write

When P15–P8 are defined as outputs, they can be controlled by writing to this register. Reading this register returns the last value written to it, however, this value may not be the actual state of the output pin since these pins can be in three-state mode. The MSB of this register corresponds with P15 and the LSB of this register corresponds with P8.

### Input Polarity Inversion Register 1 (PIR1)—Read/Write

When P7–P0 are defined as inputs, this register inverts the polarity of the input value read from the input port register. If the corresponding bit in this register is set to *1*, the value of this bit in the GSR register is the inverted value of the input pin. If the corresponding bit in this register is set to *0*, the value of this bit in the GSR register is the actual value of the input pin. The MSB of this register corresponds with P7 and the LSB of this register corresponds with P0.

### Input Polarity Inversion Register 2 (PIR2)—Read/Write

When P15–P8 are defined as inputs, this register inverts the polarity of the input value read from the input port register. If the corresponding bit in this register is set to *1*, the value of this bit in the GSR register is the inverted value of the input pin. If the corresponding bit in this register is set to *0*, the value of this bit in the GSR register is the actual value of the input pin. The MSB of this register corresponds with P15 and the LSB of this register corresponds with P8.

## GPIO Configuration Register 1 (GCR1)—Read/Write

This register configures the GPIOs as inputs or outputs. After power-up, the GPIOs are inputs. Setting these bits to 0 enables the GPIOs as outputs. Setting these bits to 1 enables the GPIOs as inputs. The MSB of this register corresponds with P7 and the LSB of this register corresponds with P0.

## GPIO Configuration Register 2 (GCR2)—Read/Write

This register configures the GPIOs as inputs or outputs. After power-up, the GPIOs are inputs. Setting these bits to 0 enables the GPIOs as outputs. Setting these bits to 1 enables the GPIOs as inputs. The MSB of this register corresponds with P15 and the LSB of this register corresponds with P8.

## Input Internal Pull-up Enable/Disable Register 1 (PUR1)—Read/Write

This register enables/disables the internal pull-up resistors for an input. Writing a '1' to these bits enables the internal pull-up resistors. Writing a '0' to these bits disables the internal pull-up resistors. The MSB of this register corresponds with P7 and the LSB of this register corresponds with P0.

## Input Internal Pull-up Enable/Disable Register 2 (PUR2)—Read/Write

This register enables/disables the internal pull-up resistors for an input. Writing a '1' to these bits enables the internal pull-up resistors. Writing a '0' to these bits disables the internal pull-up resistors. The MSB of this register corresponds with P15 and the LSB of this register corresponds with P8.

## Input Interrupt Enable Register 1 (IER1)—Read/Write

This register enables/disables the interrupts for an input. After power-up, the interrupts are disabled. Writing a 1 to these bits enables the interrupt for the corresponding input pins. For complete details of the interrupt behavior for various register settings, see [Table 7](#) on page 10. No interrupts are generated for outputs when GCR bit is 0. The MSB of this register corresponds with P7 and the LSB of this register corresponds with P0.

## Input Interrupt Enable Register 2 (IER2)—Read/Write

This register enables/disables the interrupts for an input. After power-up, the interrupts are disabled. Writing a 1 to these bits enables the interrupt for the corresponding input pins. For complete details of the interrupt behavior for various register settings, see [Table 7](#) on page 10. No interrupts are generated for outputs when GCR bit is 0. The MSB of this register corresponds with P15 and the LSB of this register corresponds with P8.

## Output Three-State Control Register 1 (TSCR1)—Read/Write

This register can enable/disable the three-state mode of an output. Writing a 1 to these bits enables the three-state mode for the corresponding output pins. The MSB of this register corresponds with P7 and the LSB of this register corresponds with P0.

## Output Three-State Control Register 2 (TSCR2)—Read/Write

This register can enable/disable the three-state mode of an output. Writing a 1 to these bits enables the three-state mode for the corresponding output pins. The MSB of this register corresponds with P15 and the LSB of this register corresponds with P8.

## Input Interrupt Status Register 1 (ISR1)—Read Only

This register reports the input pins that have generated an interrupt. For complete details of the interrupt behavior for various register settings, see [Table 7](#) on page 10. The MSB of this register corresponds with P7 and the LSB of this register corresponds with P0.

## Input Interrupt Status Register 2 (ISR2)—Read-Only

This register reports the input pins that have generated an interrupt. For complete details of the interrupt behavior for various register settings, see [Table 7](#) on page 10. The MSB of this register corresponds with P15 and the LSB of this register corresponds with P8.

## Input Rising Edge Interrupt Enable Register 1 (REIR1)—Read/Write

Writing a 1 to these bits enables the corresponding input to generate an interrupt on the rising edge. For complete details of the interrupt behavior for various register settings, see [Table 7](#) on page 10. The MSB of this register corresponds with P7 and the LSB of this register corresponds with P0.

## Input Rising Edge Interrupt Enable Register 2 (REIR2)—Read/Write

Writing a 1 to these bits enables the corresponding input to generate an interrupt on the rising edge. For complete details of the interrupt behavior for various register settings, see [Table 7](#) on page 10. The MSB of this register corresponds with P15 and the LSB of this register corresponds with P8.

## Input Falling Edge Interrupt Enable Register 1 (FEIR1)—Read/Write

Writing a 1 to these bits enables the corresponding input to generate an interrupt on the falling edge. Writing a 1 to these bits makes that input generate an interrupt on the rising edge only. For complete details of the interrupt behavior for various register settings, see [Table 7](#) on page 10. The MSB of this register corresponds with P7 and the LSB of this register corresponds with P0.

## Input Falling Edge Interrupt Enable Register 2 (FEIR2)—Read/Write

Writing a 1 to these bits enables the corresponding input to generate an interrupt on the falling edge. Writing a 1 to these bits makes that input generate an interrupt on the rising edge only. For complete details of the interrupt behavior for various register settings, see [Table 7](#) on page 10. The MSB of this register corresponds with P15 and the LSB of this register corresponds with P8.

## Input Filter Enable Register 1 (IFR1)—Read/Write

By default, the input filters are enabled (IFR = 0xFF). When the input filters are enabled, any pulse that is greater than 1075ns generates an interrupt (if enabled). Pulses that are less than 225ns is filtered and will not generate an interrupt. Pulses in between this range may or may not generate an interrupt. Writing a 0 to these bits disables the input filter for the corresponding inputs. With the input filters disabled, any change on the inputs generates an interrupt (if enabled). For complete details of the interrupt behavior for various register settings, For complete details, see [Table 7](#) on page 10. The MSB of this register corresponds with P7 and the LSB of this register corresponds with P0.

## Input Filter Enable Register 2 (IFR2)—Read/Write

By default, the input filters are enabled (IFR = 0xFF). When the input filters are enabled, any pulse that is greater than 1075ns generates an interrupt (if enabled). Pulses that are less than 225ns is filtered and is not generated an interrupt. Pulses in between this range may or may not generate an interrupt. Writing a 0 to these bits disables the input filter for the corresponding inputs. With the input filters disabled, any change on the inputs generates an interrupt (if enabled). For complete details of the interrupt behavior for various register settings, see [Table 7](#) on page 10. The MSB of this register corresponds with P15 and the LSB of this register corresponds with P8.

# Mechanical Dimensions

## TSSOP-24

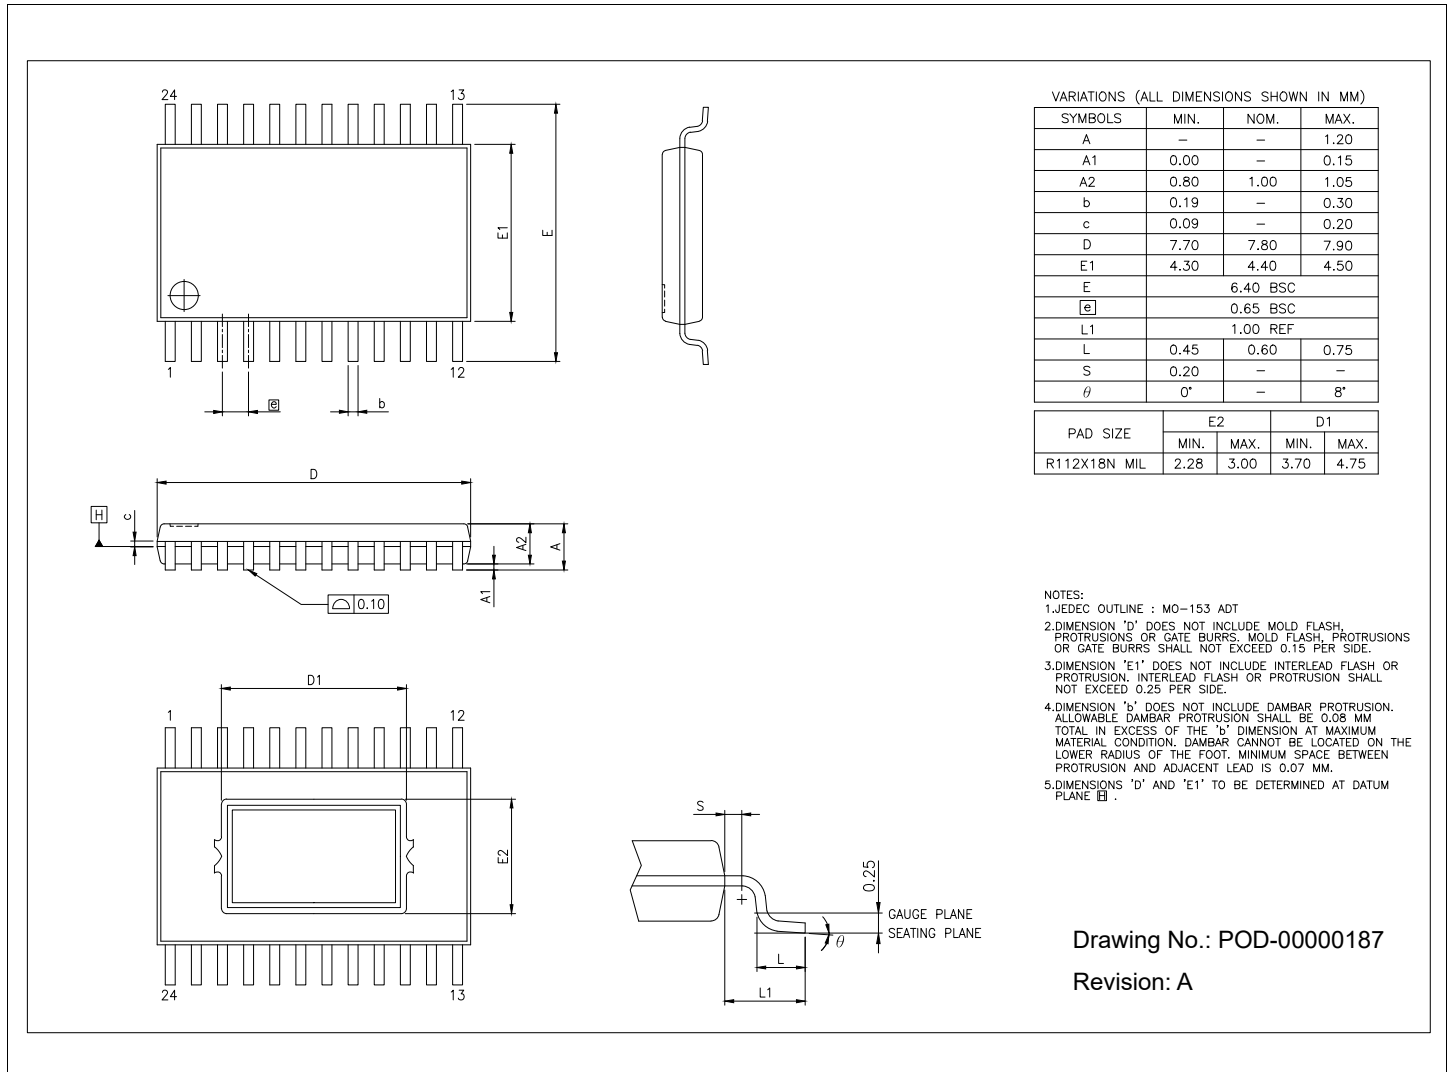


Figure 6: TSSOP-24 Mechanical Dimensions

QFN-24

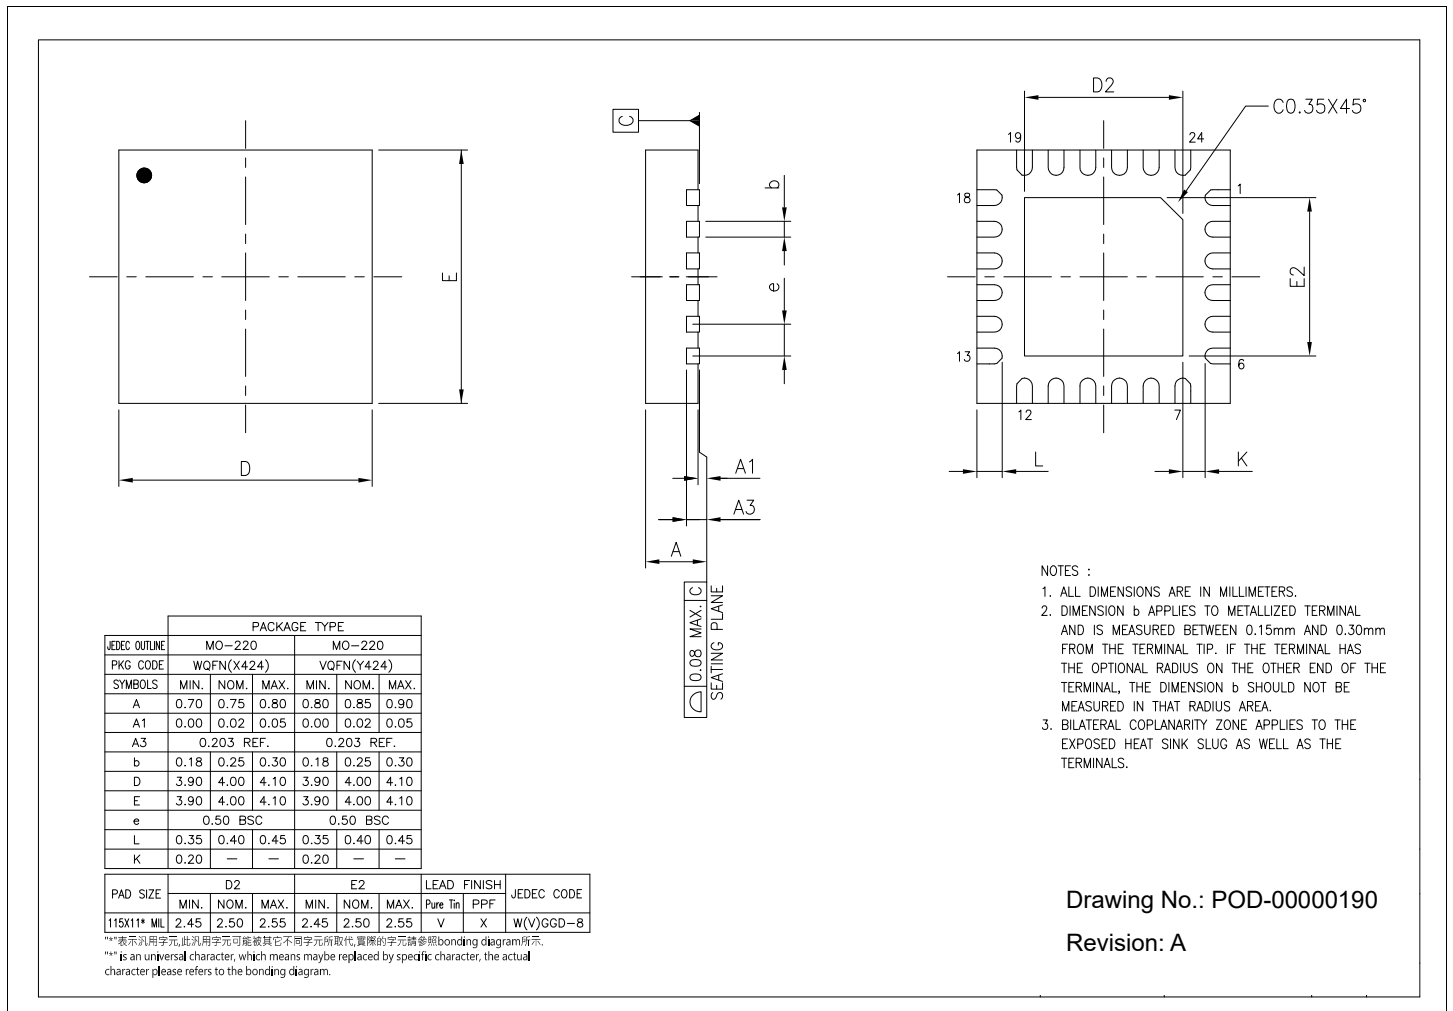


Figure 7: QFN-24 Mechanical Dimensions

## Ordering Information

**Table 8: Ordering Information**

Ordering Part Number	Package	Number of GPIOs	Operating Temperature Range	Package Method	Lead-Free
MXL82207I-AQB-R	QFNL/QFN-24	16	-40°C to 85°C	Tape and Reel	Yes
MXL82207I-AGA-R	TSSOP-24	16	-40°C to 85°C	Tape and Reel	Yes



MaxLinear, Inc.  
 5966 La Place Court, Suite 100  
 Carlsbad, CA 92008  
 Tel.: +1 (760) 692-0711  
 Fax: +1 (760) 444-8598

[www.maxlinear.com](http://www.maxlinear.com)

The content of this document is furnished for informational use only, is subject to change without notice, and should not be construed as a commitment, representation, or warranty by MaxLinear, Inc. or any of its affiliates (collectively, "MaxLinear"). MaxLinear assumes no responsibility or liability for any errors, omissions, or inaccuracies that may appear in the informational content contained in this document. Complying with all applicable copyright laws is the responsibility of the user. Without limiting the rights under copyright, no part of this document may be reproduced, stored in, or introduced into a retrieval system, or transmitted in any form or by any means (electronic, mechanical, photocopying, recording, or otherwise), or for any purpose, without the express prior written permission of MaxLinear.

EXCEPT AS OTHERWISE PROVIDED EXPRESSLY IN WRITING BY MAXLINEAR, AND TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW: (A) THE MAXLINEAR PRODUCTS ARE PROVIDED ON AN "AS IS" BASIS WITHOUT REPRESENTATIONS OR WARRANTIES OF ANY KIND, INCLUDING WITHOUT LIMITATION ANY IMPLIED OR STATUTORY WARRANTIES AND ANY WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, NON-INFRINGEMENT, OR TITLE; AND (B) MAXLINEAR DOES NOT WARRANT OR GUARANTEE THAT THE PRODUCTS WILL BE FREE OF ERRORS OR DEFECTS. MAXLINEAR PRODUCTS ARE NOT DESIGNED, INTENDED, AUTHORIZED, OR WARRANTED FOR USE IN ANY EMERGENCY, SECURITY, MILITARY, LIFE-SAVING, LIFE-SUSTAINING, OR OTHER CRITICAL USE CASE WHERE A FAILURE OR MALFUNCTION COULD REASONABLY BE EXPECTED TO CAUSE PERSONAL INJURY OR DEATH, OR DAMAGE TO OR LOSS OF PROPERTY. USERS ASSUME ALL RISK FOR USING THE MAXLINEAR PRODUCTS IN SUCH USE CASE. CUSTOMERS AND USERS ARE SOLELY RESPONSIBLE FOR USING THEIR OWN SKILL AND JUDGMENT TO DETERMINE WHETHER MAXLINEAR PRODUCTS ARE SUITABLE FOR THEIR INTENDED USE CASE, AND FOR CONDUCTING APPROPRIATE TESTING AND EVALUATION OF THE PRODUCTS FOR SUCH USE.

MaxLinear may have patents, patent applications, trademarks, copyrights, trade secrets, or other intellectual property rights covering subject matter in this document. Except as expressly provided in any written license agreement from MaxLinear, the furnishing of this document does not give you any license to these patents, patent applications, trademarks, copyrights, trade secrets, or other intellectual property.

MaxLinear, the MaxLinear logo, and any other MaxLinear trademarks (including but not limited to MxL, Full-Spectrum Capture, FSC, AirPHY, Puma, AnyWAN, VectorBoost, MXL WARE, and Panther) are all property of MaxLinear and/or its subsidiaries in the U.S.A. and other countries. All rights reserved.

All third-party marks and logos are trademarks™ or registered® trademarks of their respective holders/owners. Use of such marks by MaxLinear does not imply any affiliation with, sponsorship, or endorsement by or of the owners/holders of such trademarks. All references by MaxLinear to third-party trademarks are intended to constitute nominative fair use under applicable trademark laws and are used solely for purposes of identification and description.

Any URLs or third-party references provided are for informational purposes only; they do not constitute an endorsement or an approval by MaxLinear of any of the products, services, or content of any third-party corporation, organization, or individual. MaxLinear bears no responsibility or liability for the accuracy, legality, availability, or content of any external site or for that of subsequent links. Contact the external site for answers to questions regarding its content.