



# Ethernet

Featured Products


Ethernet Transceivers (PHYs)

Ethernet Switches

## Featured Products

# MxL86250, MxL86252, MxL86280, MxL86282

5- and 8-port 2.5G Ethernet Switches with  
Integrated PHYs and 2.5G & 10G Uplink

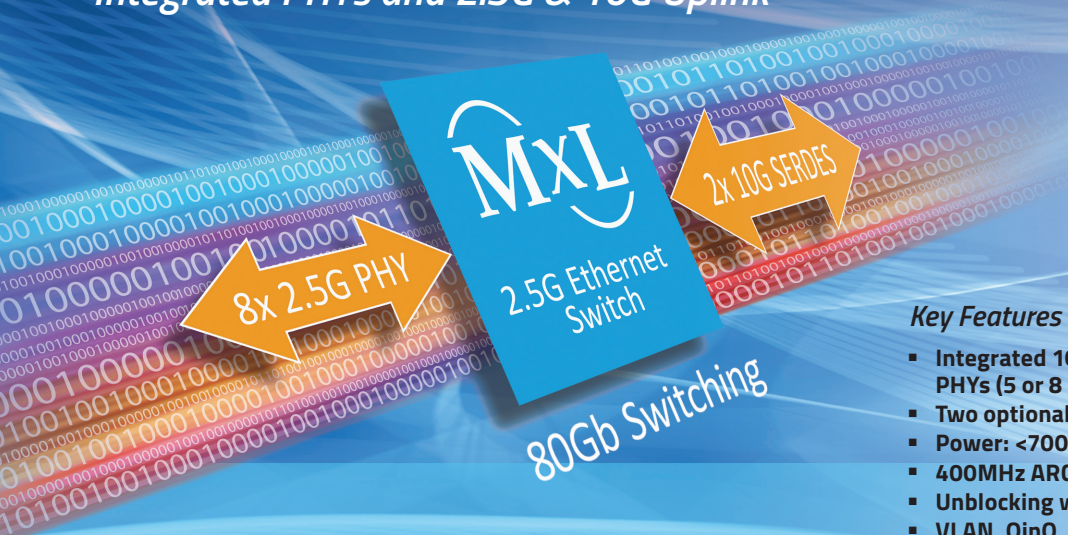

### Key Features

- Integrated 10/100/1000/2.5GBASE-T PHYs (5 or 8 ports)
- Two optional 10G uplink ports (MxL862x2)
- Power: <700mW per PHY\*
- 400MHz ARC CPU: Web smart
- Unblocking wire speed switching
- VLAN, QinQ, QoS, traffic shaping, ...
- BGA-277 12x12mm, 0.628mm pitch

### Benefits




- Low power consumption through high integration
- Power saving modes for short cables, through Energy Efficient Ethernet (EEE) and no-link detection
- Integrated processor enables web-smart switch applications

### Applications

- Standalone five or eight port 2.5G switches
- Eight port SMB switches with two 10G uplinks
- Five port SMB switches with 10G and 2.5G uplinks
- Unmanaged and web-smart switches
- External switches for gateway SoCs

### Standards

- IEEE Standard for Ethernet, IEEE802.3™-2022

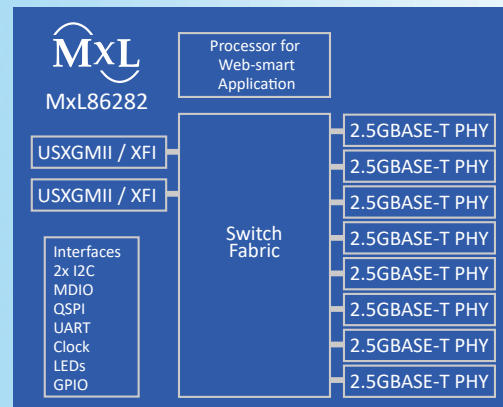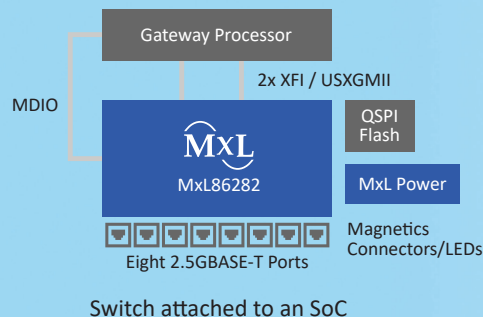
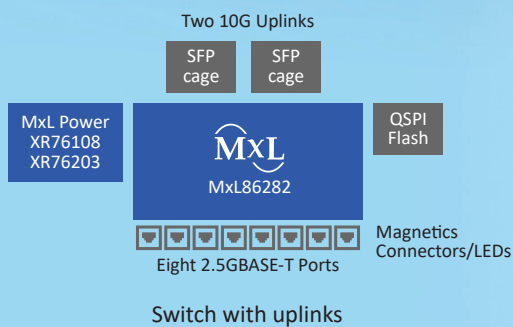


MxL86282 Block Diagram




Ethernet Transceivers (PHYs)

Product	Ethernet Ports	Ethernet Bandwidth (Mbps)	Interfaces	MACSEC	1588v2	SyncE	EEE	Thermal Protection	Min Temp (°C)	Max Temp (°C)	Package (X x Y mm)
MxL86289C	8	10, 100, 1000, 2500	2 x USXGMII-M		•	•	•	•	0	70	BGA-256 (13x13)
MxL86289I	8	10, 100, 1000, 2500	2 x USXGMII-M		•	•	•	•	-40	85	BGA-256 (13x13)
GPY245	4	10, 100, 1000, 2500	SGMII+, USXGMII-M	•	•	•	•	•	-40	85	BGA-236 (12x12)
GPY241	4	10, 100, 1000, 2500	SGMII+, USXGMII-M		•		•	•	0	70	BGA-236 (12x12)
GPY215	1	10, 100, 1000, 2500	SGMII+	•	•	•	•	•	-40	85	QFN-56 (7x7)
GPY212	1	10, 100, 1000, 2500	SGMII+	•	•		•	•	0	70	QFN-56 (7x7)
GPY211	1	10, 100, 1000, 2500	SGMII+		•		•	•	0	70	QFN-56 (7x7)
MxL86211C	1	10, 100, 1000, 2500	SGMII+		•		•	•	0	70	QFN-40 (5x5)
GPY115	1	10, 100, 1000	SGMII	•	•	•	•	•	-40	85	QFN-56 (7x7)
MxL86110C	1	10, 100, 1000	RGMII			•	•		0	70	QFN-40 (5x5)
MxL86110I	1	10, 100, 1000	RGMII			•	•		-40	85	QFN-40 (5x5)
MxL86111C	1	10, 100, 1000	RGMII, RGMII/1000BASE-X/100BASE-FX			•	•		0	70	QFN-48 (6x6)
MxL86111I	1	10, 100, 1000	RGMII, RGMII/1000BASE-X/100BASE-FX			•	•		-40	85	QFN-48 (6x6)
MxL86112C	1	10, 100, 1000	SGMII			•	•	•	0	70	QFN-40 (5x5)

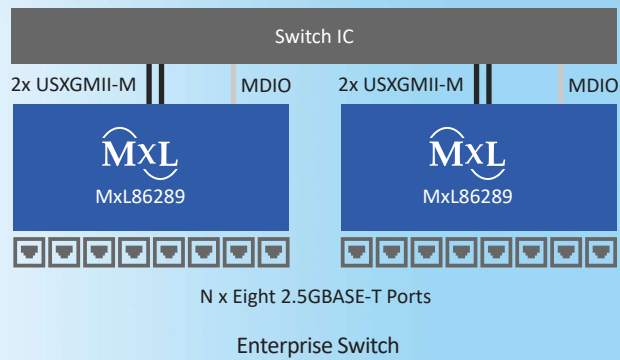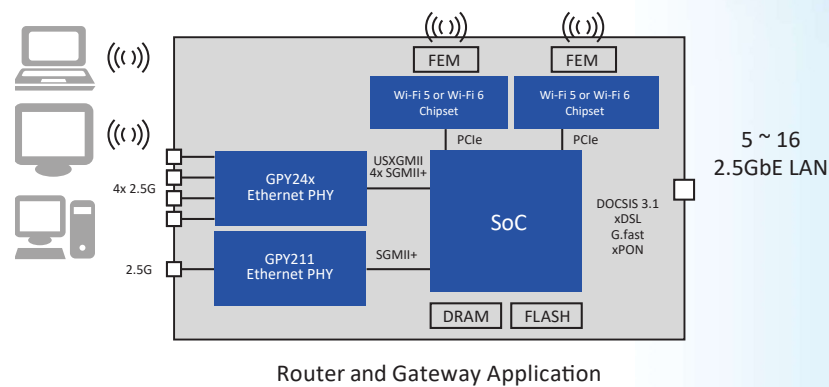


## Ethernet Switches

Product	Ethernet Ports	Ethernet Bandwidth (Mbps)	Interface/Uplink Ports	Interfaces	Supply Voltage (V)	Web-Smart Support	1588v2	SyncE	Min Temp (°C)	Max Temp (°C)	Package (X x Y mm)
MxL86281S	16	10, 100, 1000, 2500	2	USXGMII	3.3/1.8/1.2/0.8	•			0	70	2x BGA-277 (12x12)
MxL86282C	8	10, 100, 1000, 2500	2	XFI / USXGMII / SGMII+	3.3/1.8/1.2/0.8				0	70	BGA-277 (12x12)
MxL86282S	8	10, 100, 1000, 2500	2	XFI / USXGMII / SGMII+	3.3/1.8/1.2/0.8	•			0	70	BGA-277 (12x12)
MxL86282I	8	10, 100, 1000, 2500	2	XFI / USXGMII / SGMII+	3.3/1.8/1.2/0.8		•	•	-40	85	BGA-277 (12x12)
MxL86252C	5	10, 100, 1000, 2500	2	XFI / USXGMII / SGMII+	3.3/1.8/1.2/0.8				0	70	BGA-277 (12x12)
MxL86252I	5	10, 100, 1000, 2500	2	XFI / USXGMII / SGMII+	3.3/1.8/1.2/0.8		•	•	-40	85	BGA-277 (12x12)
MxL86252L	5	10, 100, 1000, 2500	2	XFI / USXGMII / SGMII+	3.3/1.8/1.2/0.8				0	70	BGA-277 (12x12)
MxL86252S	5	10, 100, 1000, 2500	2	XFI / USXGMII / SGMII+	3.3/1.8/1.2/0.8	•			0	70	BGA-277 (12x12)
GSW145	4	10, 100, 1000	2	RGMII, SGMII+	3.3/1.1				-40	85	MRQFN-105 (8x8)
GSW141	4	10, 100, 1000	2	RGMII, SGMII	3.3/1.1				0	70	MRQFN-105 (8x8)
GSW140	4	10, 100, 1000	2	RGMII, SGMII+	3.3/1.1				0	70	MRQFN-105 (8x8)
GSW125	2	10, 100, 1000	2	RGMII, SGMII+	3.3/1.1				-40	85	MRQFN-105 (8x8)
GSW120	2	10, 100, 1000	2	RGMII, SGMII+	3.3/1.1				0	70	MRQFN-105 (8x8)

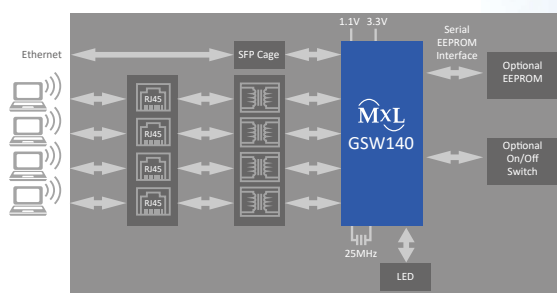

Standalone Desktop Switch with Optional Brightness On/Off Switch

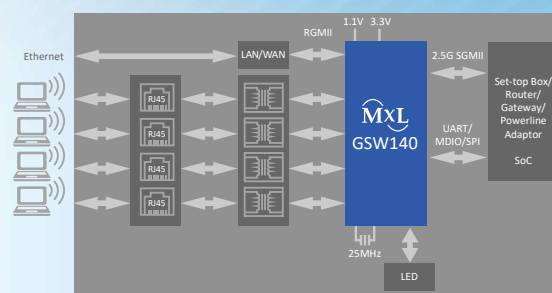

Home Gateway



**Corporate Headquarters:**  
 5966 La Place Court  
 Suite 100  
 Carlsbad, CA 92008  
 Tel.: +1 (760) 692-0711  
 Fax: +1 (760) 444-8598  
[www.maxlinear.com](http://www.maxlinear.com)

The content of this document is furnished for informational use only, is subject to change without notice, and should not be construed as a commitment by MaxLinear, Inc. MaxLinear, Inc. assumes no responsibility or liability for any errors or inaccuracies that may appear in the informational content contained in this document.

Reproduction, in part or whole, without the prior written consent of MaxLinear, Inc. is prohibited. MaxLinear, the MaxLinear logo, and any other MaxLinear trademarks (including but not limited to MxL, Full-Spectrum Capture, FSC, AirPHY, Puma, and AnyWAN, VectorBoost, MXL WARE, and Panther) are all property of MaxLinear, Inc. or one of MaxLinear's subsidiaries in the U.S.A. and other countries. All rights reserved. All third-party marks and logos are trademarks™ or registered® trademarks of their respective holders/owners.

© 2025 MaxLinear, Inc. All rights reserved.